


Research Data

Air-flow rate[m ³ /h]	147
Pressure[Pa]	83.32
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PA134ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	13
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	0.12
IP	55
INS	



PMN-A134ATEX

Pe-el antistatic housing -INOX impeller - epoxy painted motor support - stainless steel screws

Certificazioni





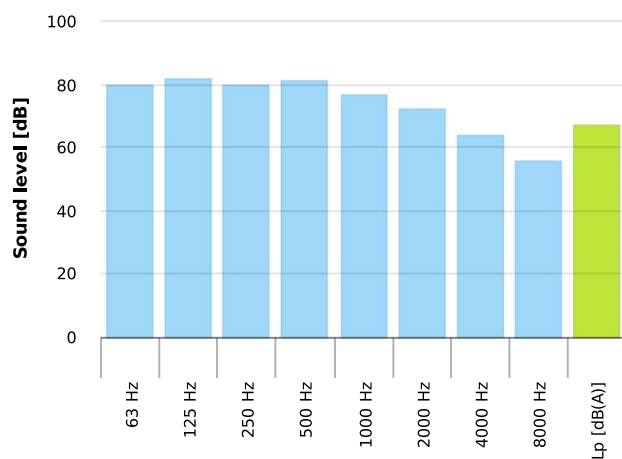


Table engines


Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.47
Voltage[V]	400
Cos φ	0.64
n	0.57

Working point

Q [m3/h]	147
Psta [Pa]	83.32
Ptot [Pa]	85.02
Pin [kW] [W]	16.66
nsta	0.203
ntot	0.208
Rpm	1450

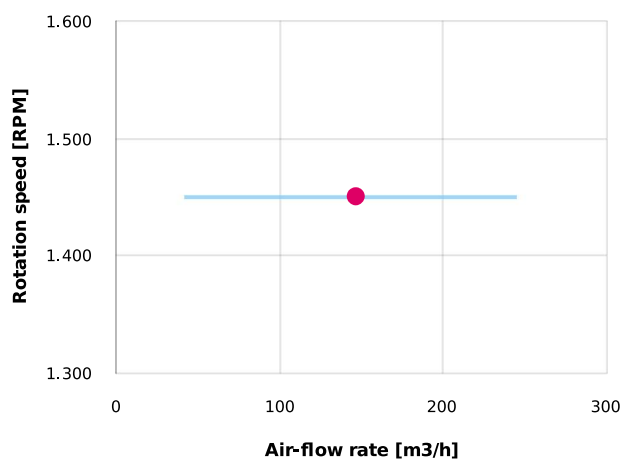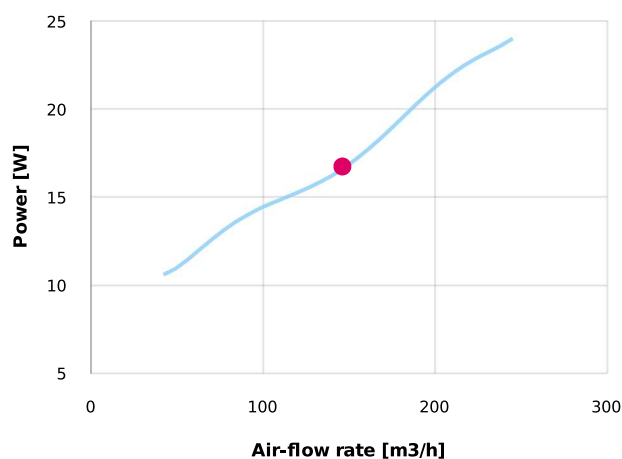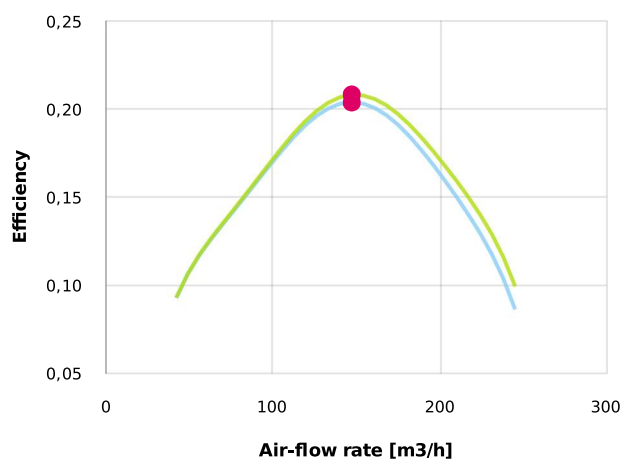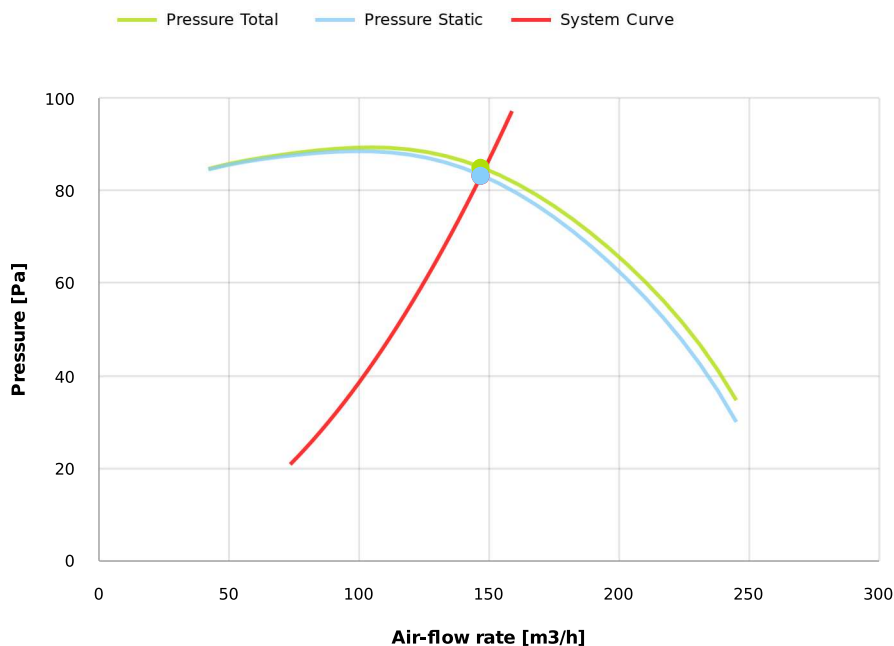

Dimensions

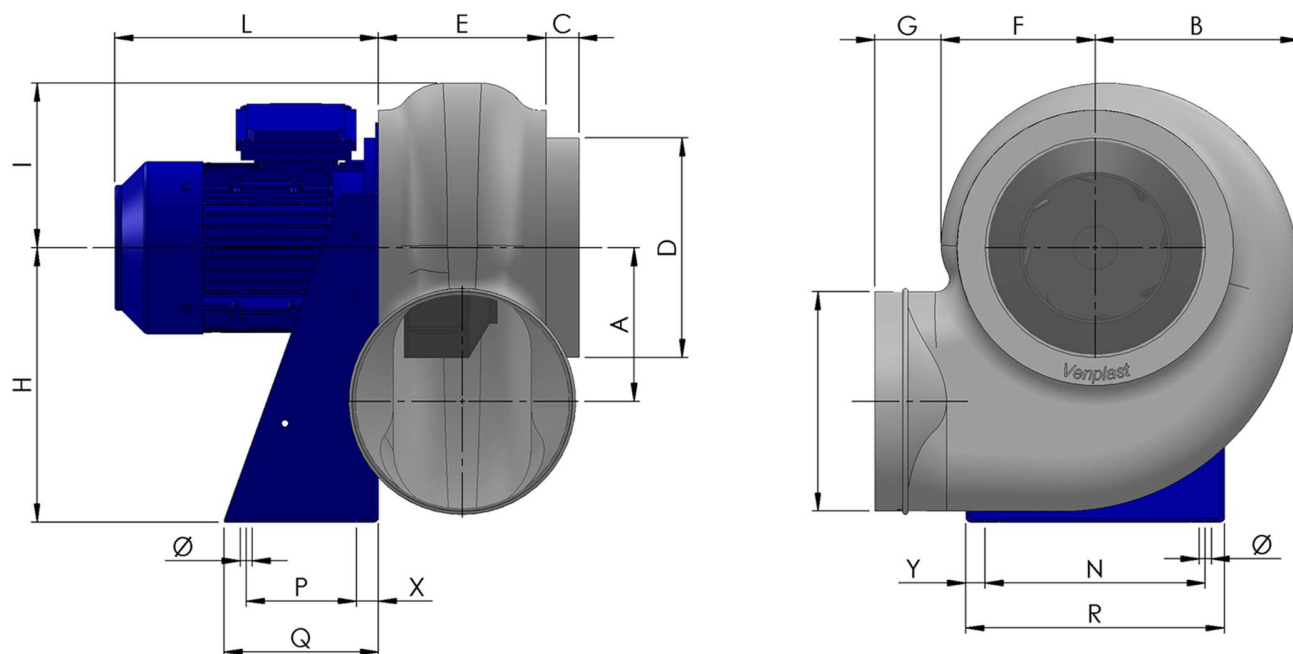

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
90	125	25	125	110	94	55	170	110	190	210	11	50	85
R				X				Y					
235				17.5				12.5					

Configurations & cad

