

Research Data


Air-flow rate[m ³ /h]	515
Pressure[Pa]	508.1
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PA162ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	19
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	0.37
IP	55
INS	

Table engines

Motors data are not available



PMN-A162ATEX






Pe-el antistatic housing -INOX impeller - epoxy painted motor support - stainless steel screws

Certificazioni




Working point

Q [m3/h]	515
Psta [Pa]	508.1
Ptot [Pa]	521.3
Pin [kW] [W]	374.2
nsta	0.194
ntot	0.199
Rpm	2800

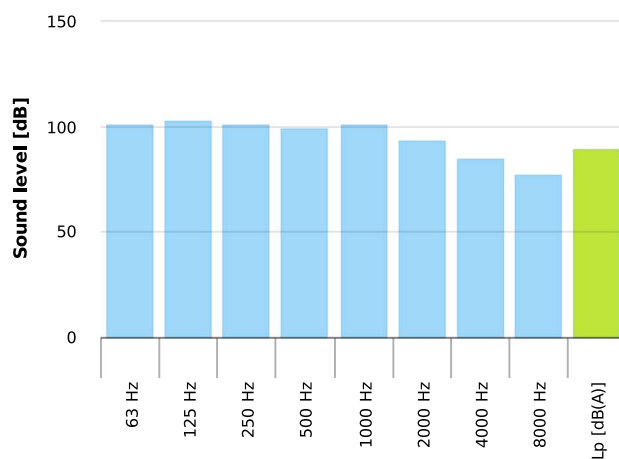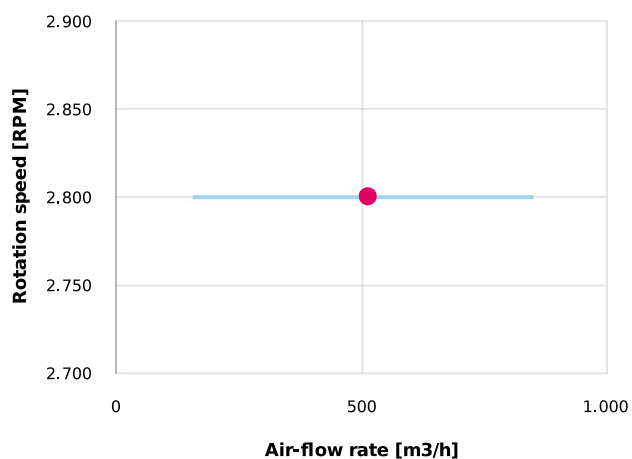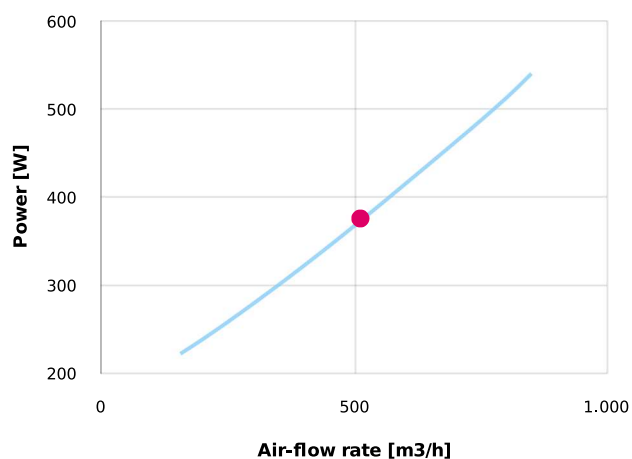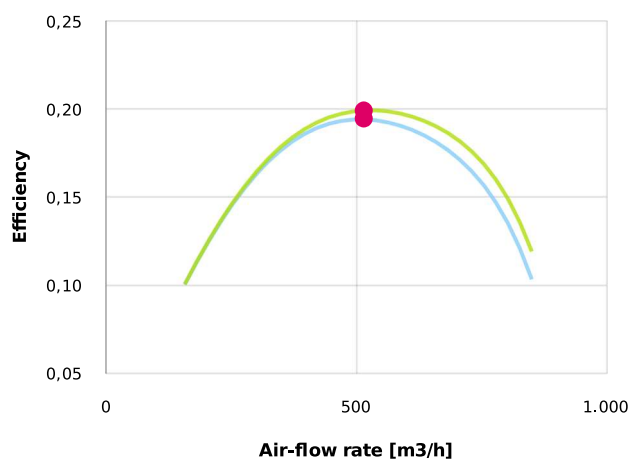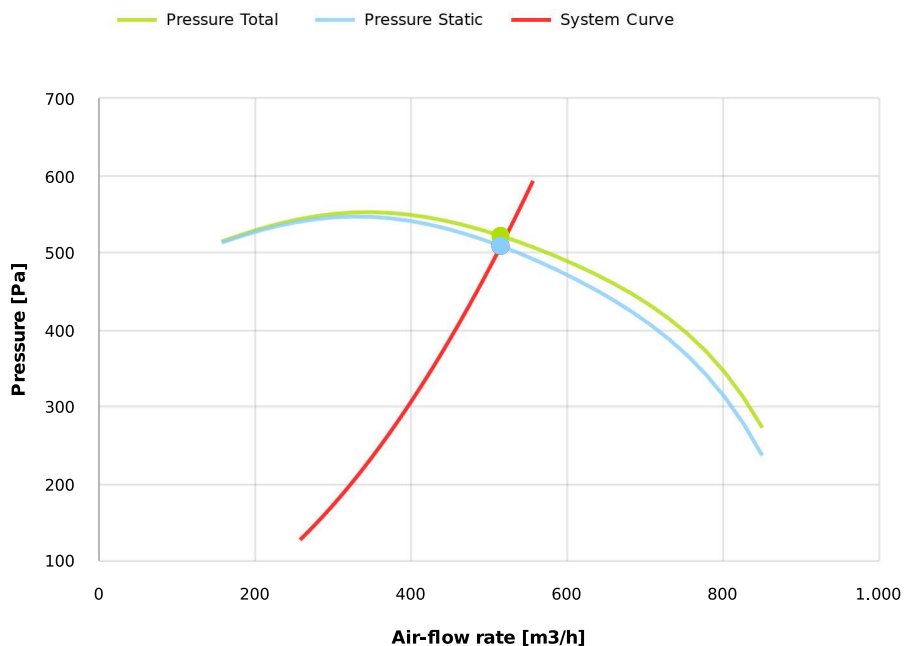

Dimensions

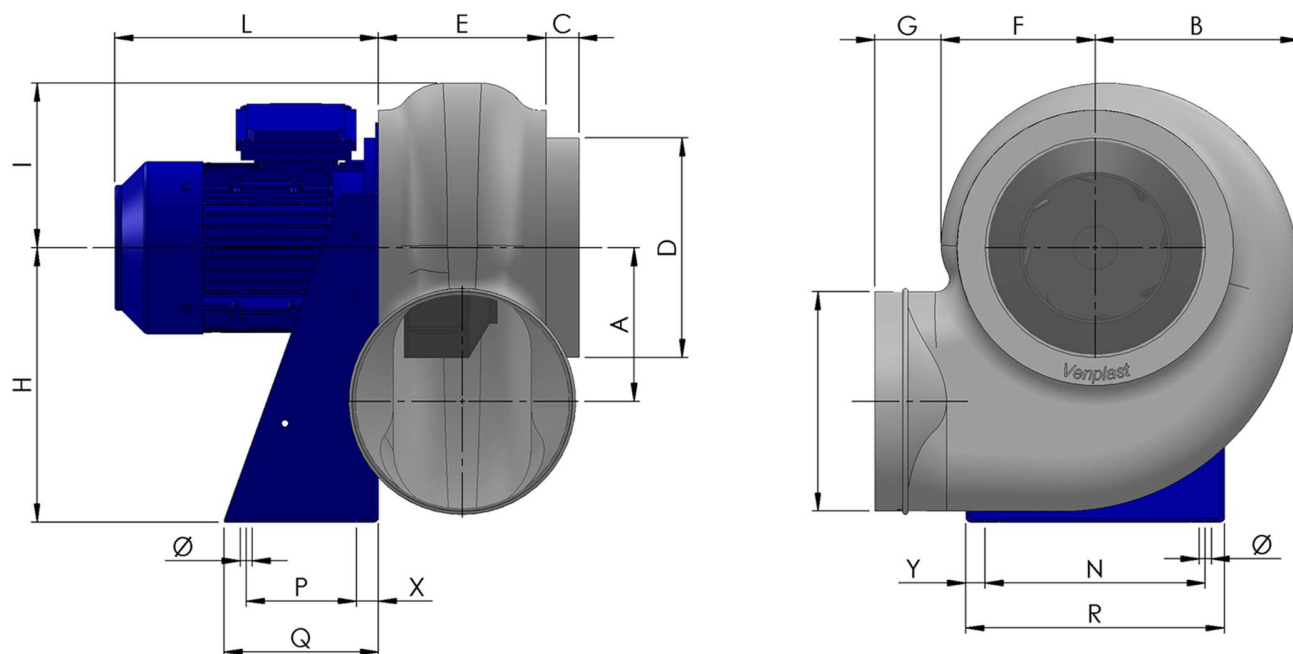

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
110	140	30	140	125	123	55	205	130	220	240	11	80	120
R				X				Y					
270				20				15					

Configurations & cad

