


Research Data

Air-flow rate[m ³ /h]	257
Pressure[Pa]	127.1
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PA164ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	16
Frequency[Hz]	50
Speed[rpm]	1400
Power[kW]	0.12
IP	55
INS	



PMN-A164ATEX

Pe-el antistatic housing -INOX impeller - epoxy painted motor support - stainless steel screws

Certificazioni





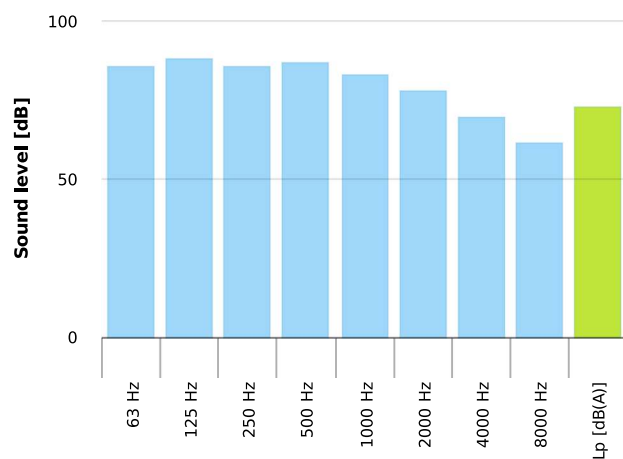


Table engines


Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.47
Voltage[V]	400
Cos φ	0.64
n	0.57

Working point

Q [m³/h]	257
P_{sta} [Pa]	127.1
P_{tot} [Pa]	130.4
P_{in} [kW] [W]	46.72
n_{sta}	0.194
n_{tot}	0.199
Rpm	1400

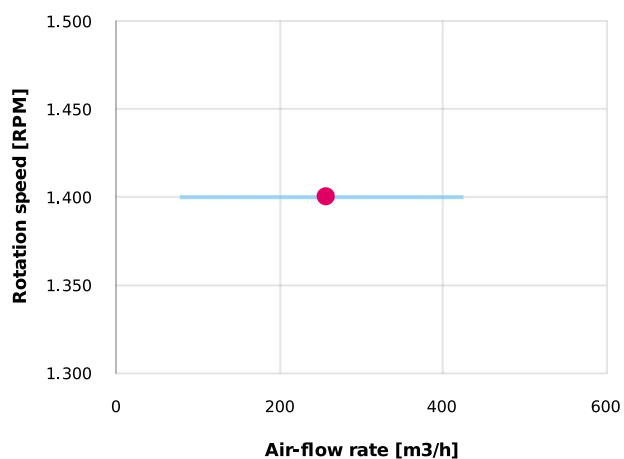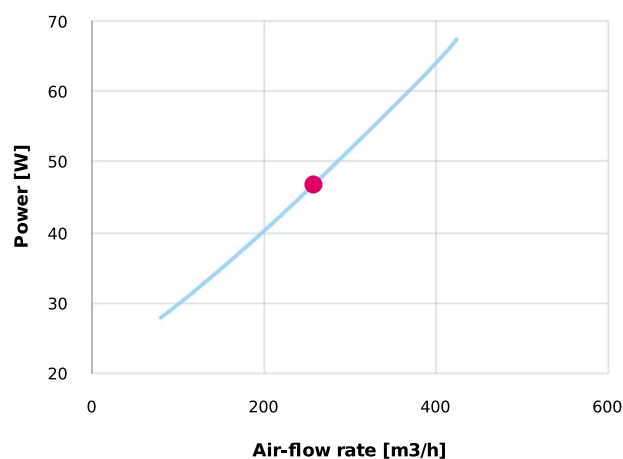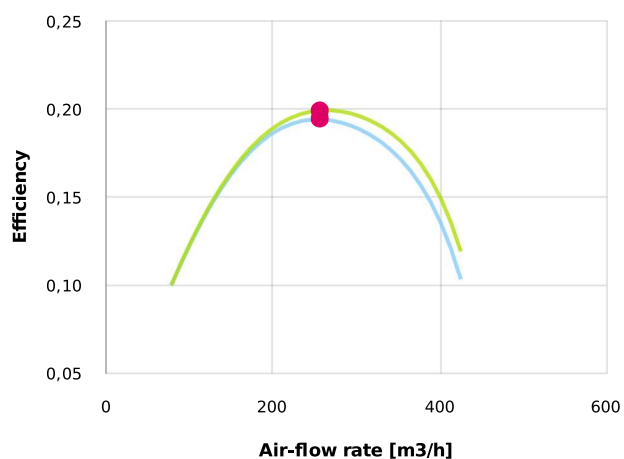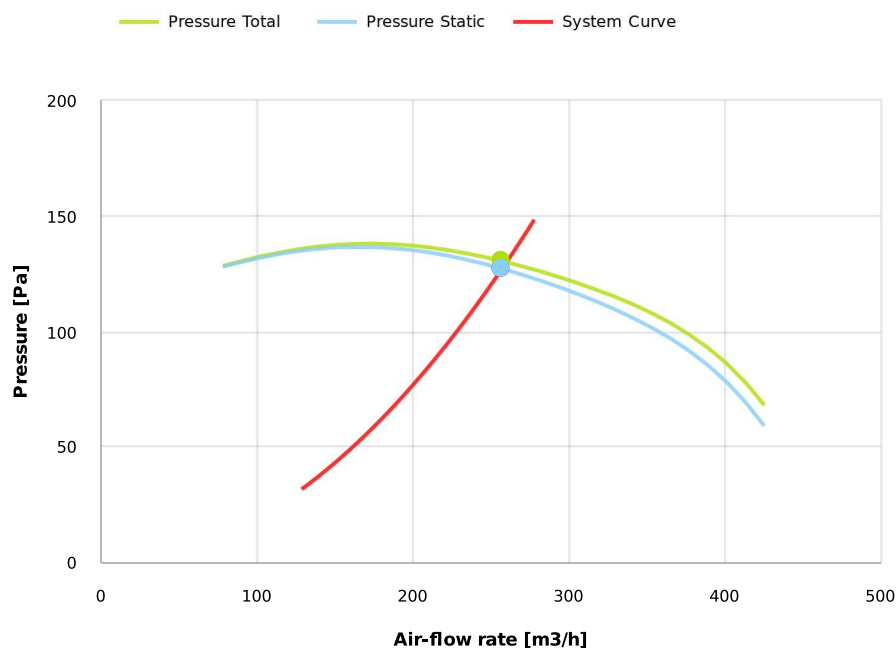

Dimensions

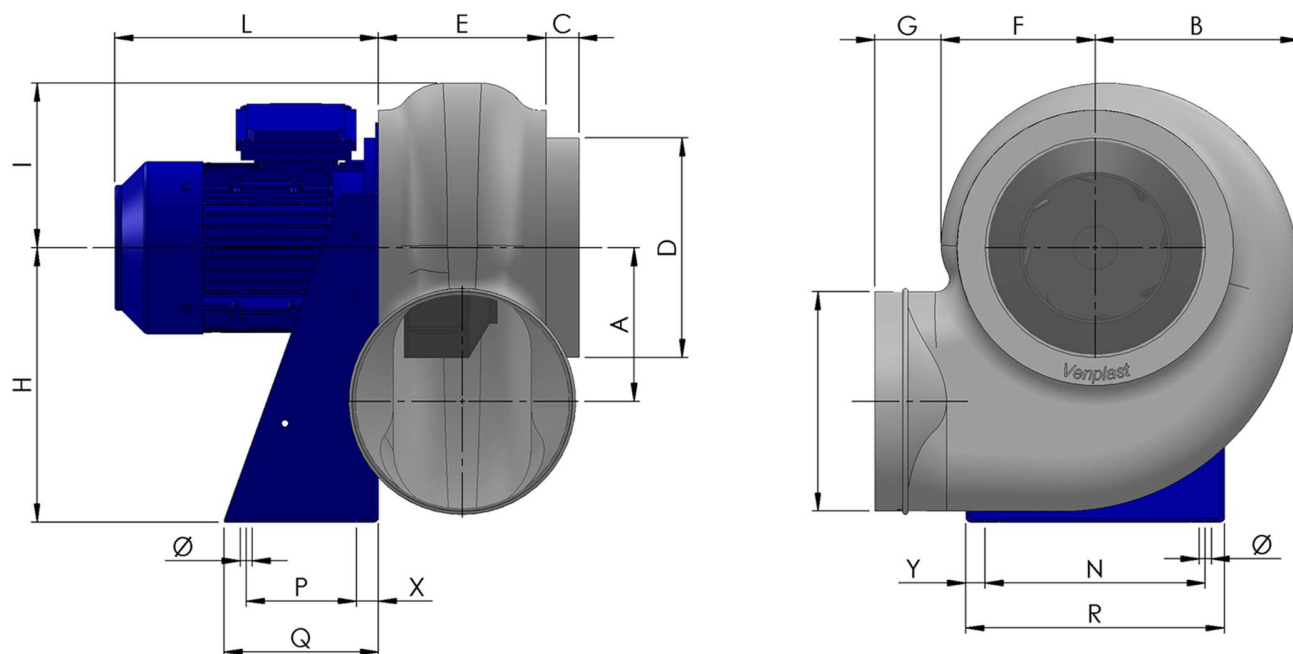

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
110	140	30	140	125	123	55	205	130	190	240	11	80	120
R				X				Y					
270				20				15					

Configurations & cad

