


Research Data

Air-flow rate[m ³ /h]	257
Pressure[Pa]	127.1
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PA164
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	8
Frequency[Hz]	50
Speed[rpm]	1400
Power[kW]	0.12
IP	55
INS	


PMN-A164

Pe moulded housing - INOX impeller - epoxy painted motor support - stainless steel screws

Certificazioni





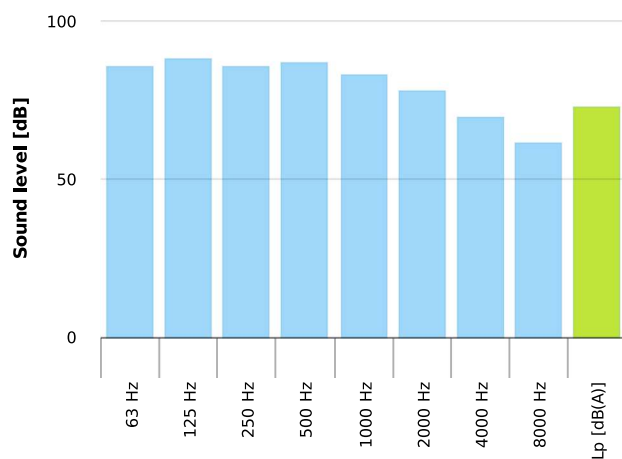


Table engines


Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.47
Voltage[V]	400
Cos φ	0.64
n	0.57

Working point

Q [m3/h]	257
Psta [Pa]	127.1
Ptot [Pa]	130.4
Pin [kW] [W]	46.72
nsta	0.194
ntot	0.199
Rpm	1400

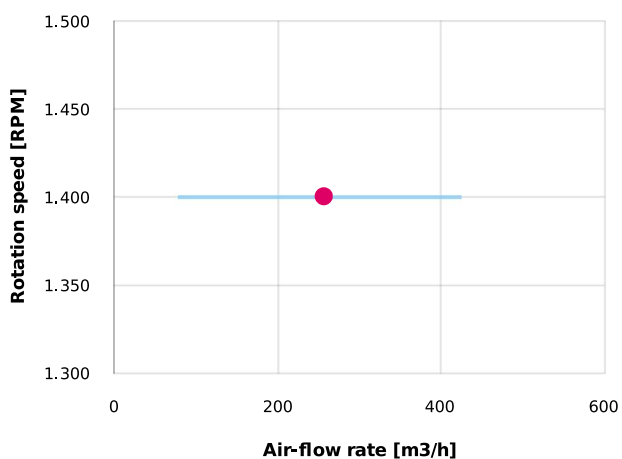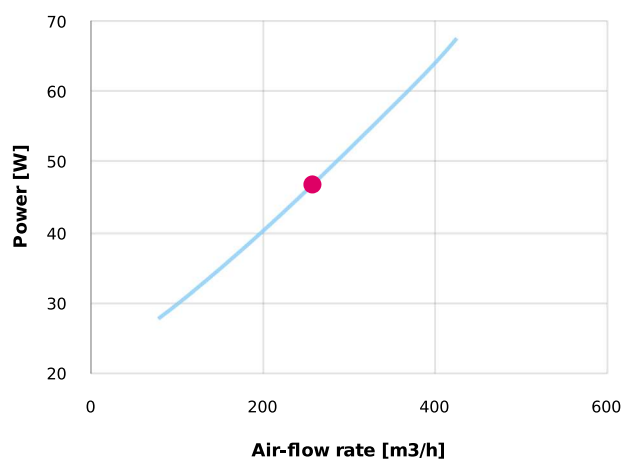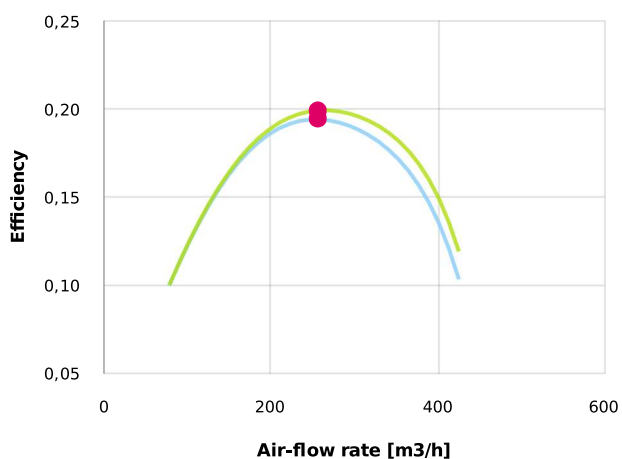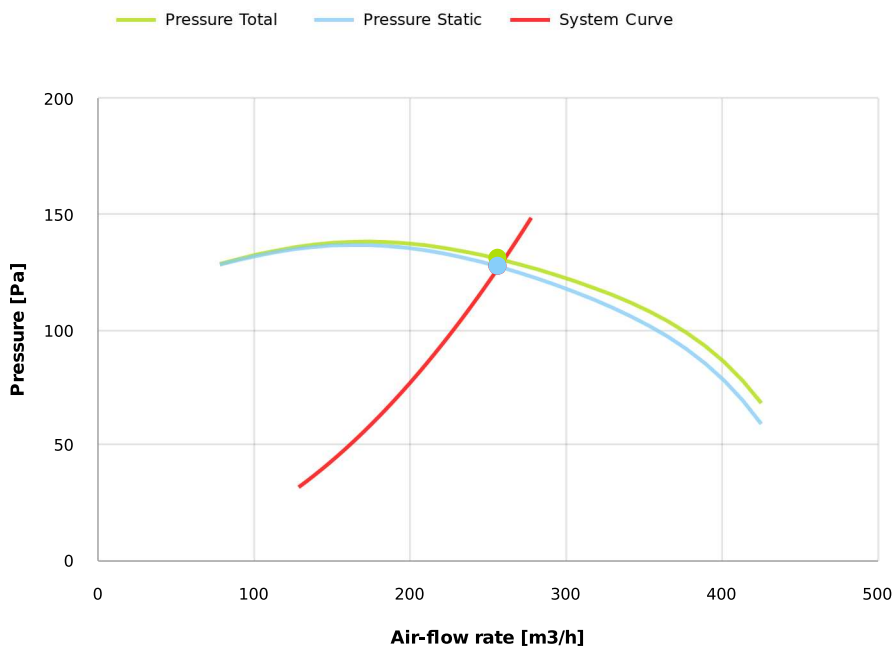


Dimensions

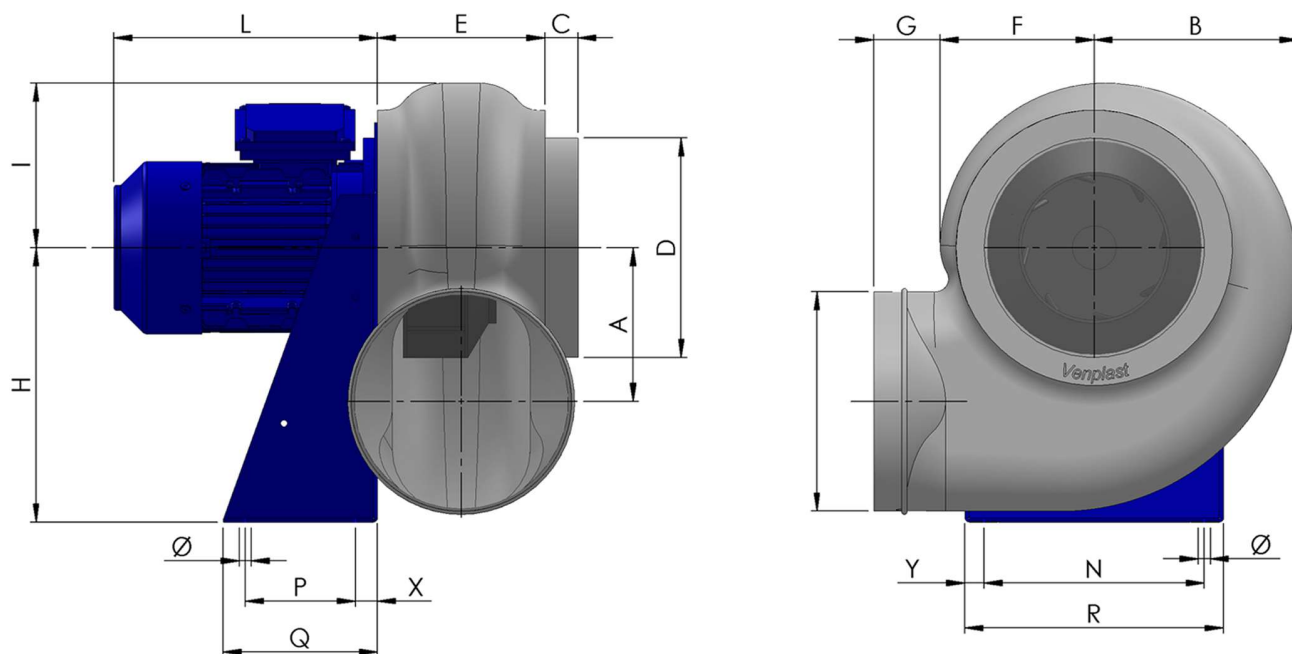


A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
110	140	30	140	125	123	55	205	130	190	240	11	80	120
R				X				Y					
270				20				15					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

