


Research Data

Air-flow rate[m ³ /h]	1053
Pressure[Pa]	792.1
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PA202ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	33
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	1.1
IP	55
INS	



PMN-A202ATEX

Pe-el antistatic housing -INOX impeller - epoxy painted motor support - stainless steel screws

Certificazioni





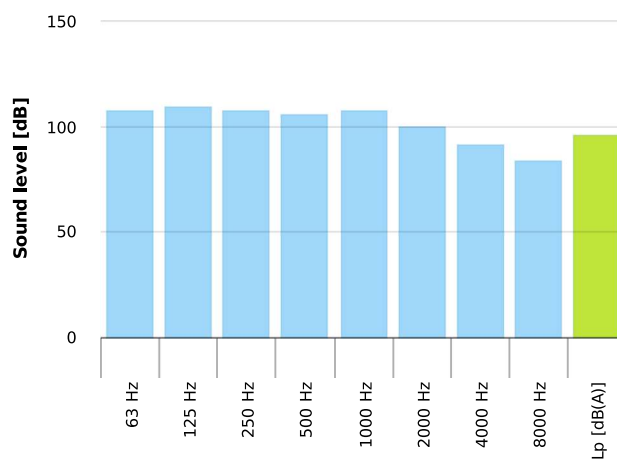


Table engines


Class IE	IE1	IE2	IE3
Size	80	80	80
Power[kW]	1.1	1.1	1.1
Current[A]	2.51	2.43	2.4
Voltage[V]	400	400	400
Cos φ	0.83	0.82	0.82
n	0.762	0.796	0.827

Working point

Q [m³/h]	1053
P_{sta} [Pa]	792.1
P_{tot} [Pa]	805.3
P_{in} [kW] [W]	1226.
n_{sta}	0.188
n_{tot}	0.192
Rpm	2800

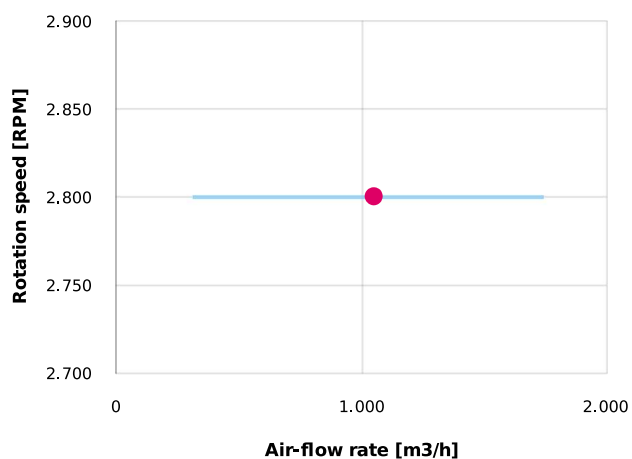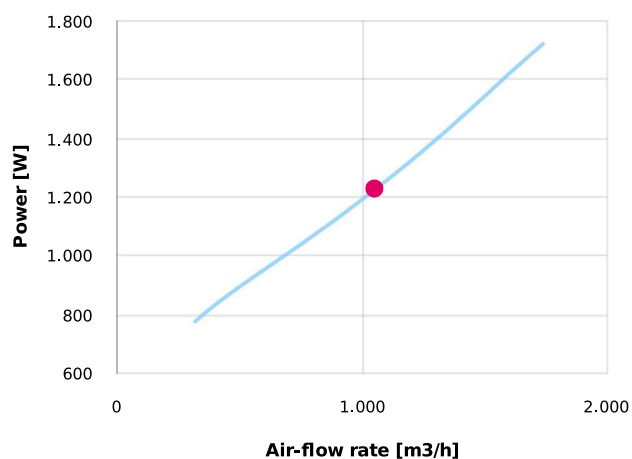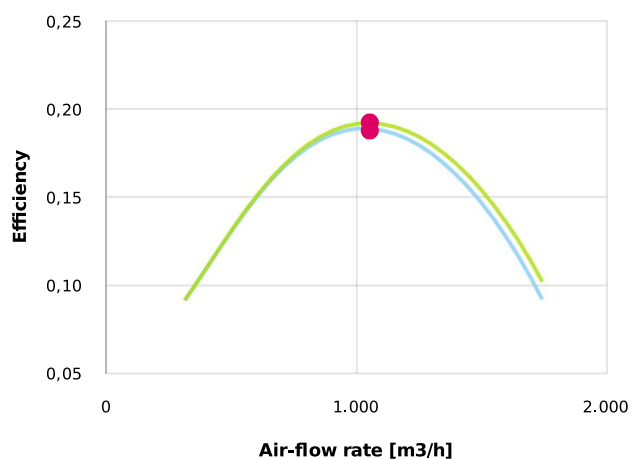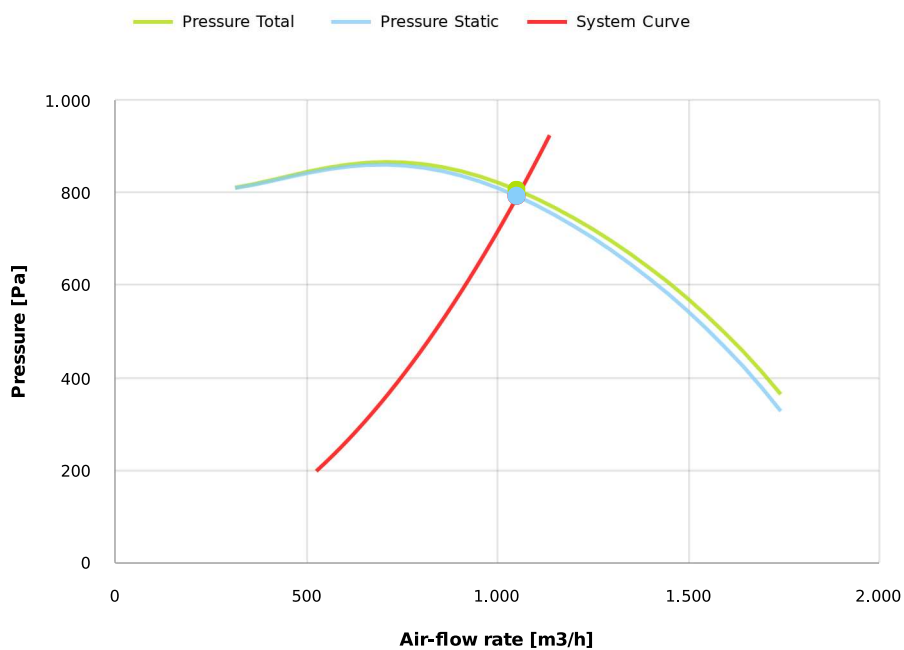

Dimensions

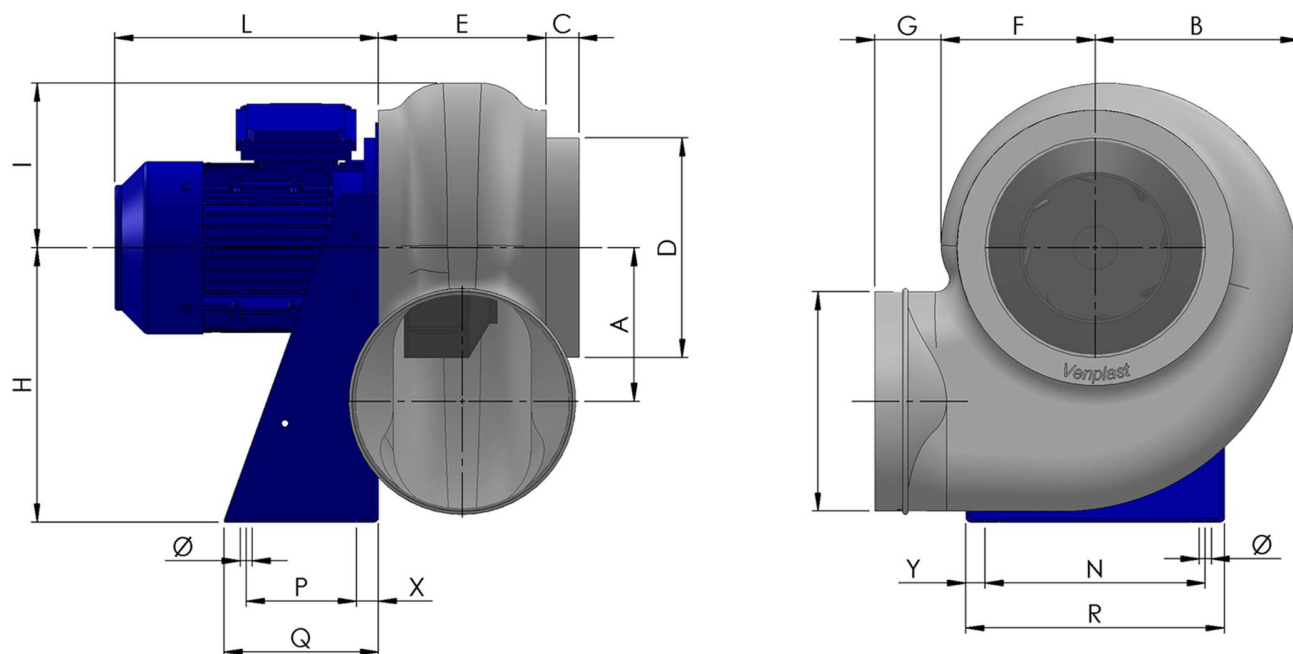

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
140	185	30	200	155	140	60	250	150	260	200	11	100	140
R				X				Y					
235				20				17.5					

Configurations & cad

