


Research Data

Air-flow rate[m ³ /h]	4141
Pressure[Pa]	2089
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PQ402
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	57
Frequency[Hz]	50
Speed[rpm]	2850
Power[kW]	4
IP	55
INS	


PQ402

Pe moulded housing - PP welded impeller - epoxy painted motor support - stainless steel screws

Certificazioni



QR-Code





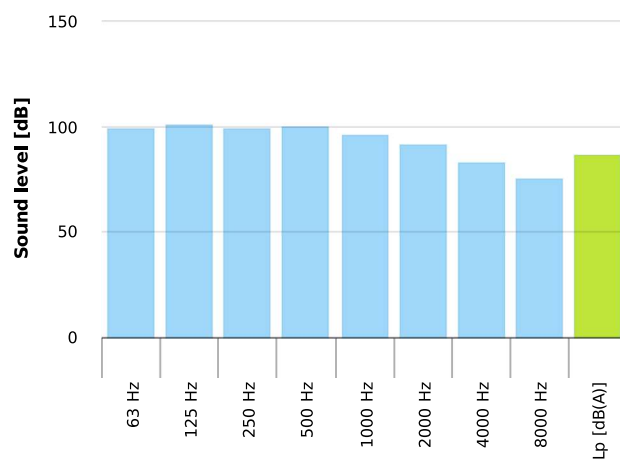


Table engines


Class IE	IE1	IE2	IE3
Size	112M	112M	112M
Power[kW]	4	4	4
Current[A]	7.88	7.73	7.3
Voltage[V]	400	400	400
Cos φ	0.87	0.87	0.9
n	0.842	0.858	0.881

Working point

Q [m ³ /h]	4141
P _{sta} [Pa]	2089.
P _{tot} [Pa]	2122.
P _{in} [kW] [W]	2948.
n _{sta}	0.808
n _{tot}	0.821
Rpm	2850

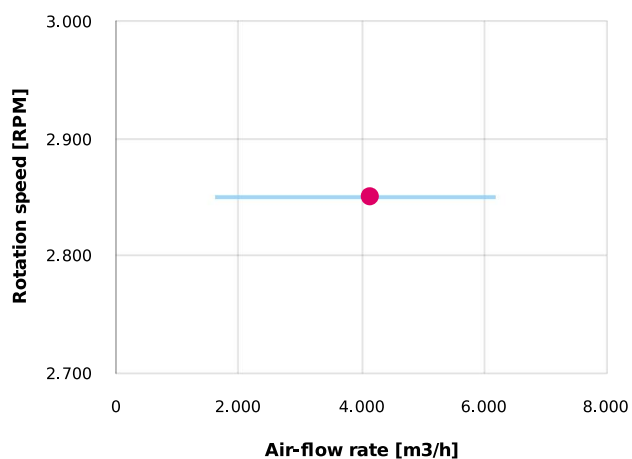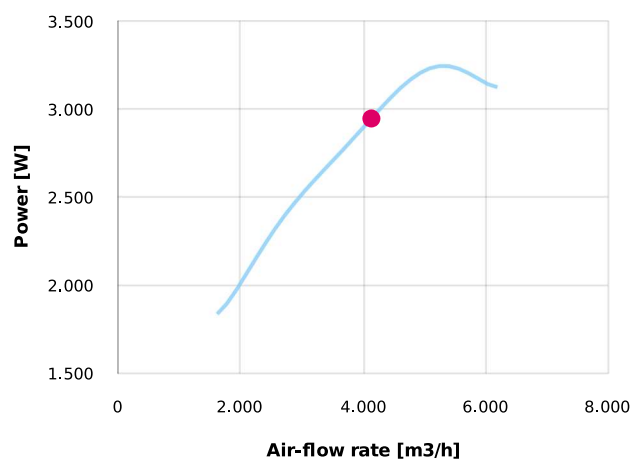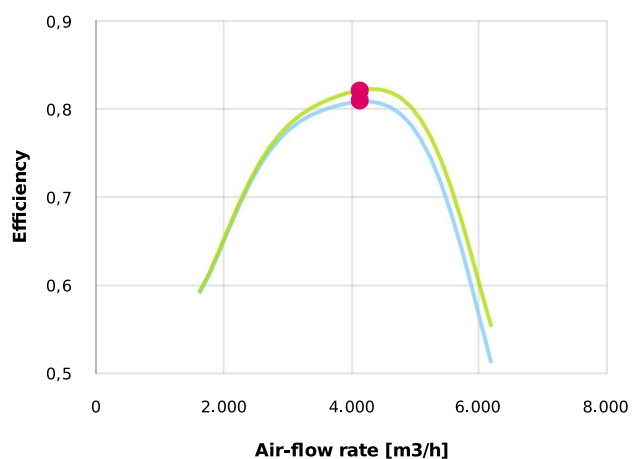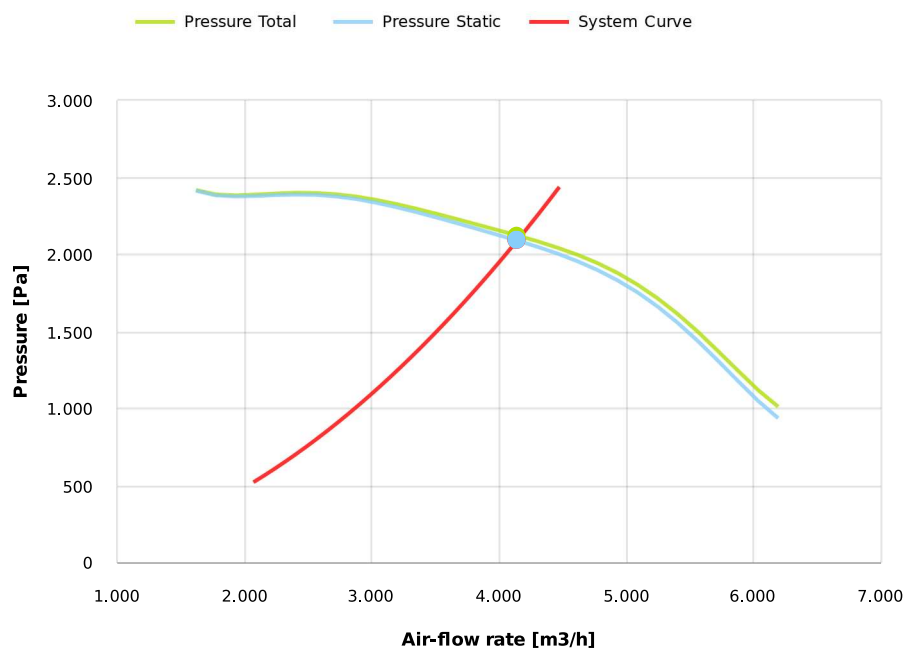


Dimensions

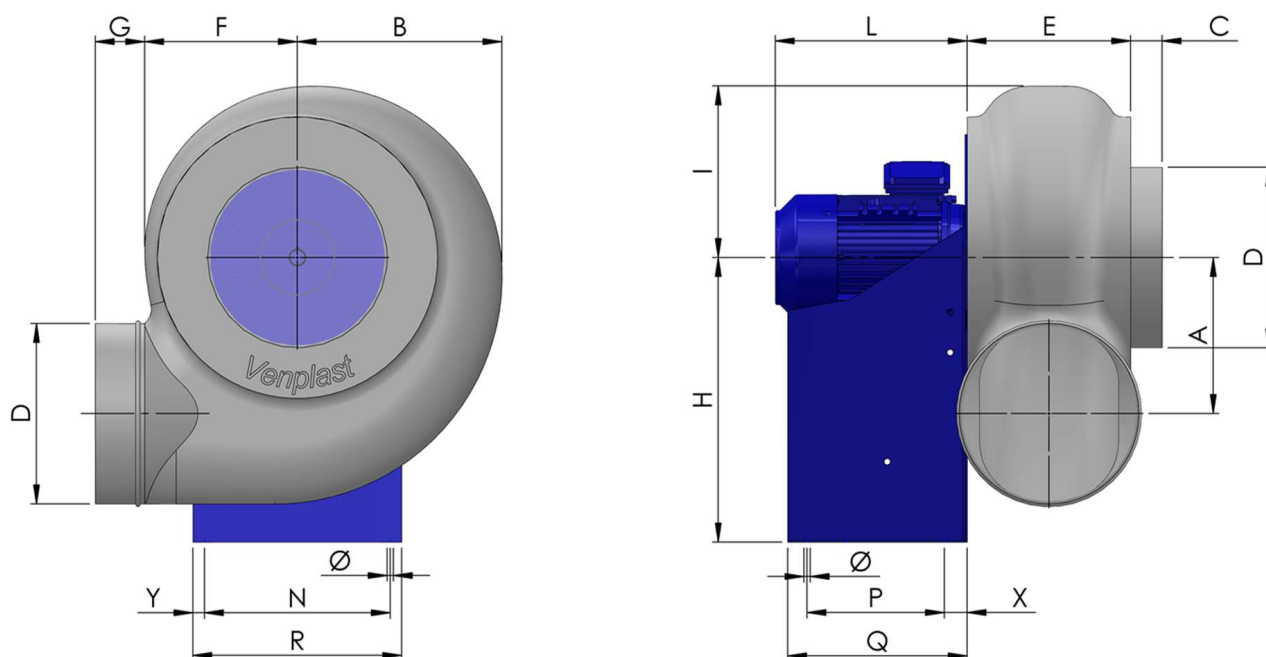


A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
290	356	40	315	252	264	55	495	340	330	325	11	270	340
R				X				Y					
365				40				20					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

