


Research Data

Air-flow rate[m ³ /h]	6149
Pressure[Pa]	2707
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PQ452ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	102
Frequency[Hz]	50
Speed[rpm]	2850
Power[kW]	0.75
IP	55
INS	



PQ452ATEX

Pe-el antistatic housing - PP-el welded impeller - epoxy painted motor support - stainless steel screws

Certificazioni





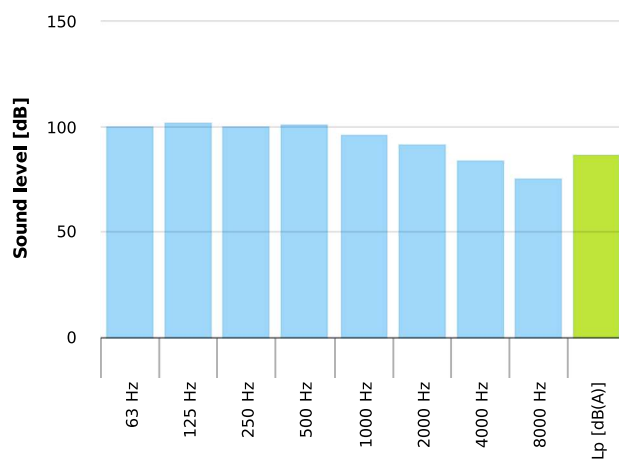


Table engines


Class IE	IE1	IE2	IE3
Size	80	80	80
Power[kW]	0.75	0.75	0.75
Current[A]	1.83	1.73	1.7
Voltage[V]	400	400	400
Cos φ	0.82	0.81	0.81
n	0.72	0.774	0.807

Working point

Q [m³/h]	6149
P_{sta} [Pa]	2707
P_{tot} [Pa]	2753
P_{in} [kW] [W]	5711
n_{sta}	0.809
n_{tot}	0.823
Rpm	2850

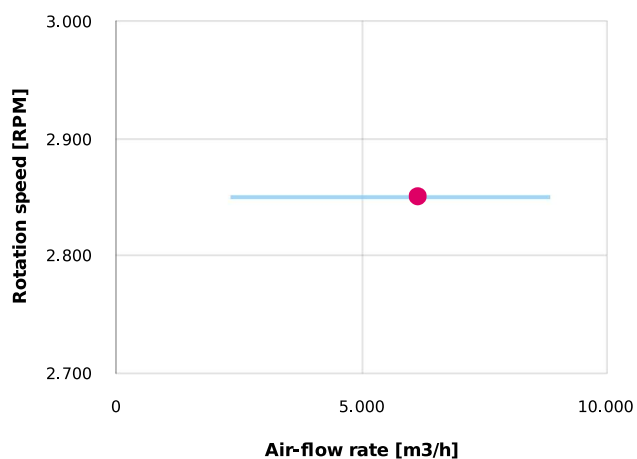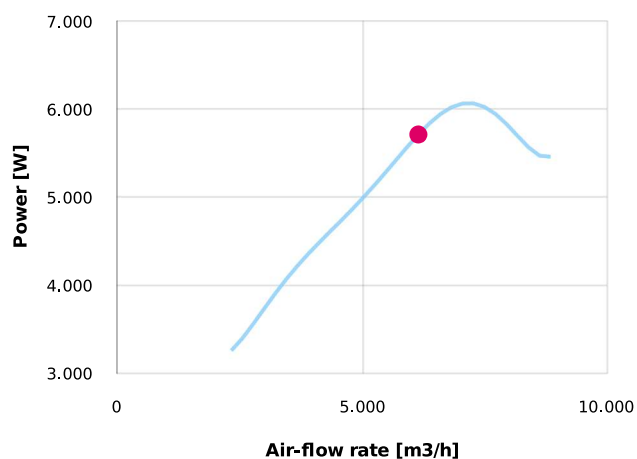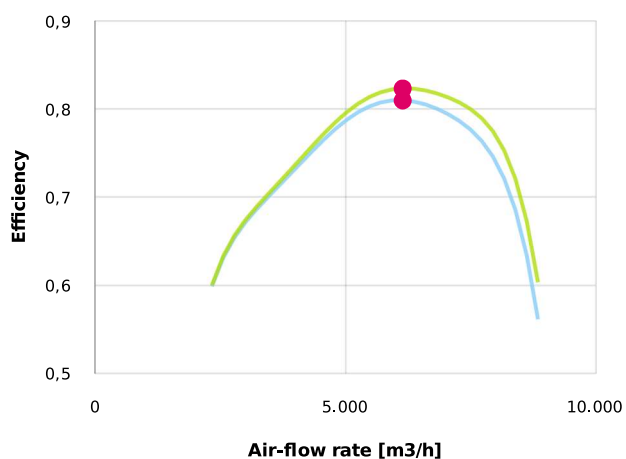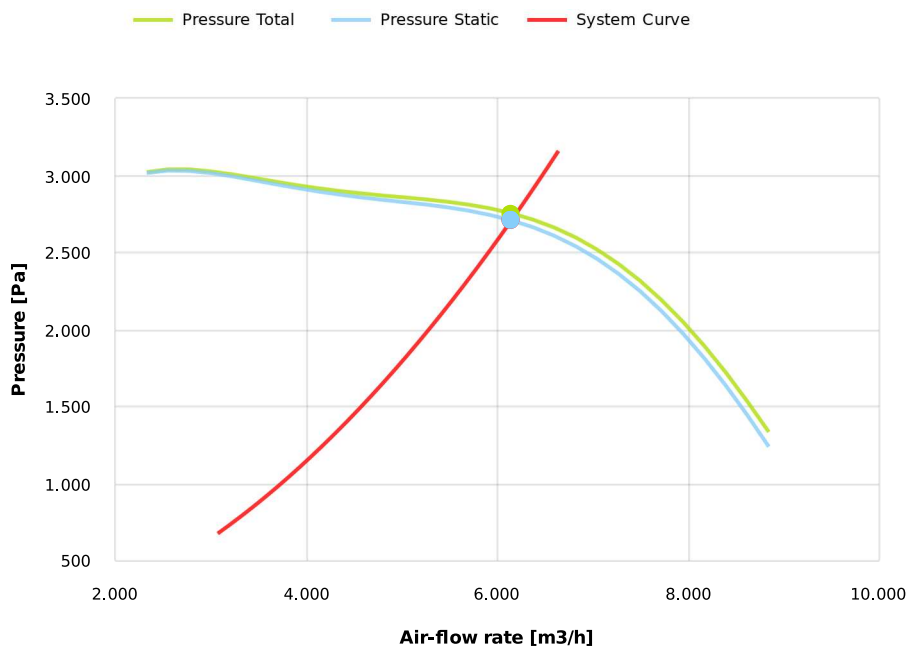

Dimensions

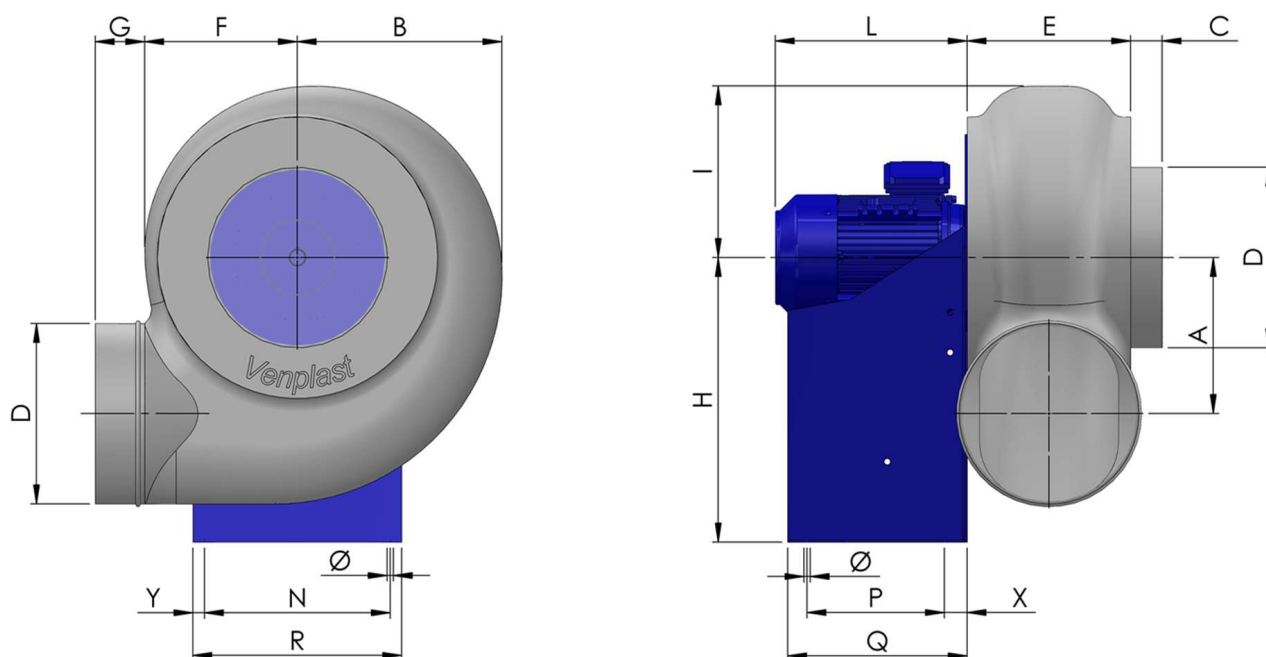

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
324	400	40	355	287	295	55	550	330	415	370	11	270	340
R				X				Y					
410				40				20					

Configurations & cad

