


Research Data

Air-flow rate[m ³ /h]	11881
Pressure[Pa]	4139
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PQ562ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	115
Frequency[Hz]	50
Speed[rpm]	2850
Power[kW]	15
IP	55
INS	



PQ562ATEX

Pe-el antistatic housing - PP-el welded impeller - epoxy painted motor support - stainless steel screws

Certificazioni





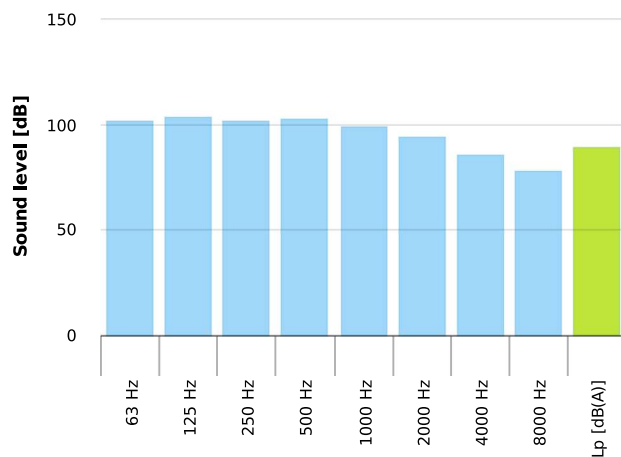


Table engines


Class IE	IE1	IE2	IE3
Size	160M	160M	160M
Power[kW]	15	15	15
Current[A]	26.61	26.6	26.5
Voltage[V]	400	400	400
Cos φ	0.91	0.9	0.89
n	0.894	0.903	0.919

Working point

Q [m ³ /h]	11881
P _{sta} [Pa]	4139.
P _{tot} [Pa]	4205.
P _{in} [kW] [W]	16439
n _{sta}	0.831
n _{tot}	0.844
Rpm	2850

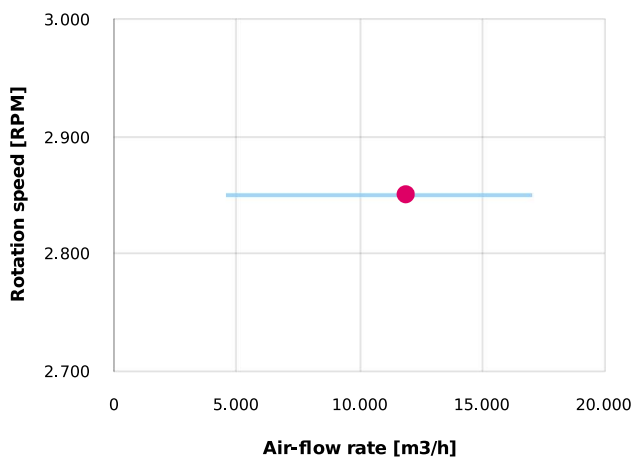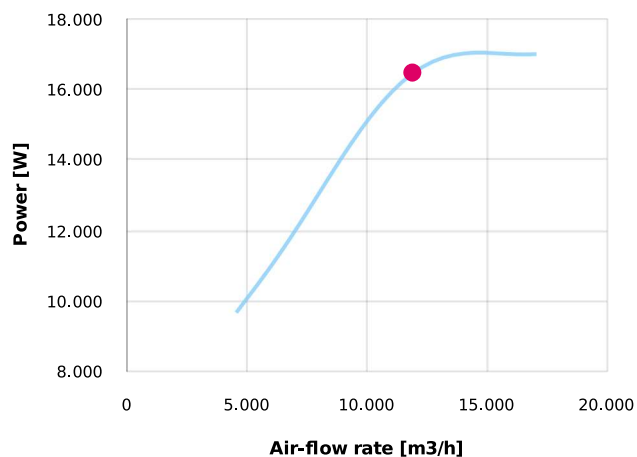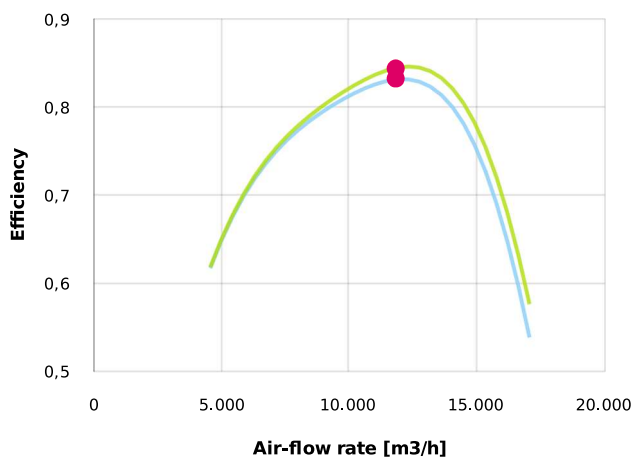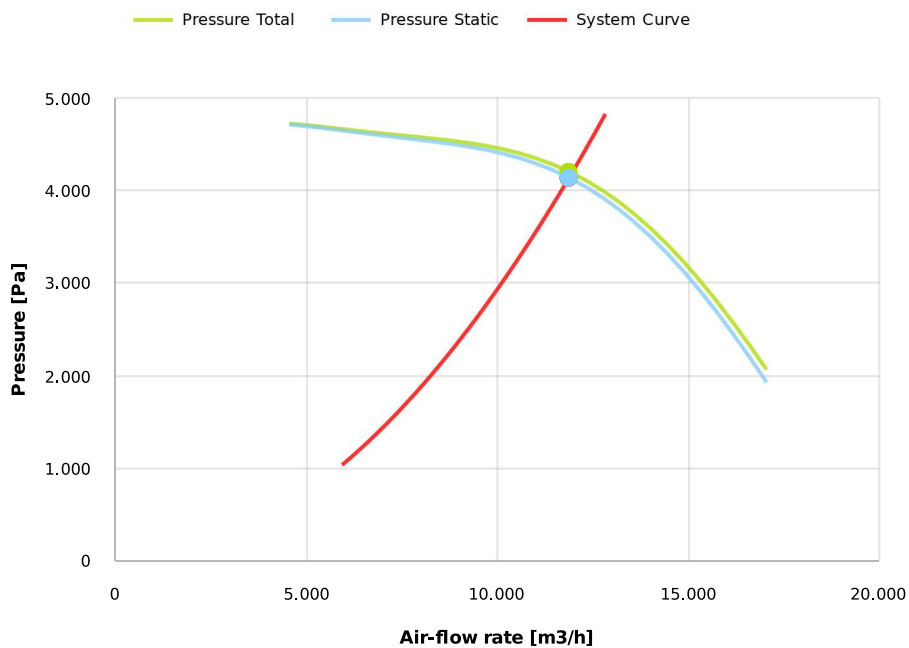


Dimensions

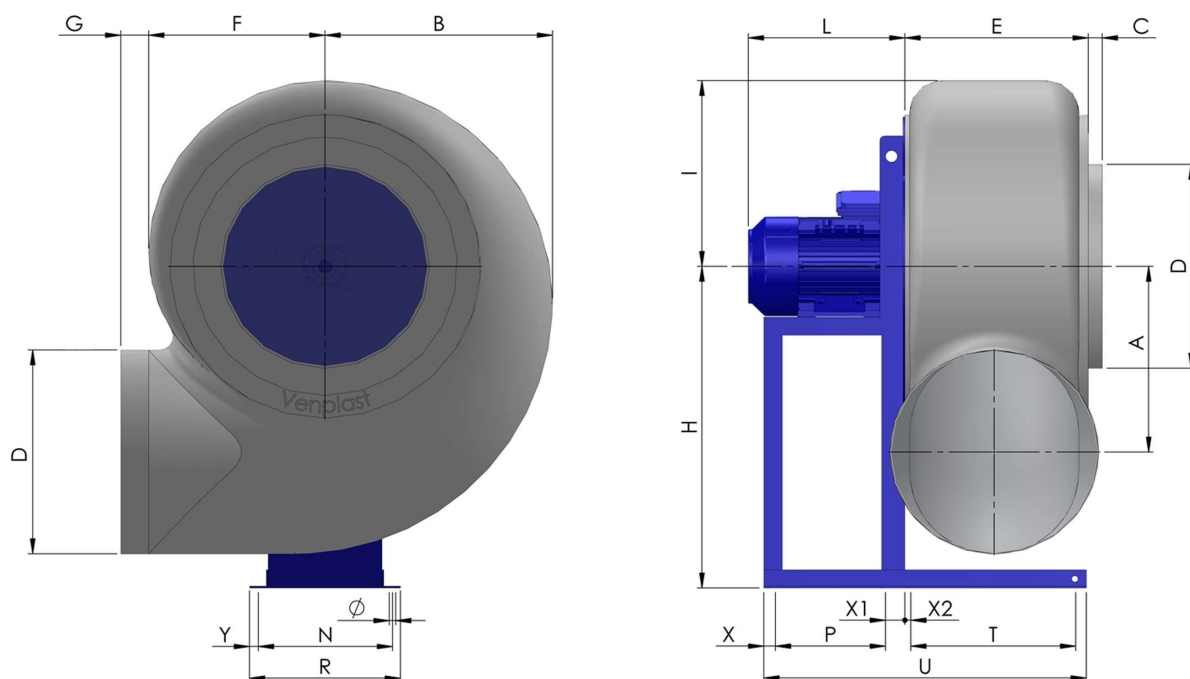


A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
410	490	50	450	365	380	80	710	410	550	445	14	345	481
T	U	X	X1	X2	Y								
355	889	25	40	15	18								

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

