


Research Data

Air-flow rate[m ³ /h]	7976
Pressure[Pa]	1398
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PQ634ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	117
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	4
IP	55
INS	



PQ634ATEX

Pe-el antistatic housing - PP-el welded impeller - epoxy painted motor support - stainless steel screws

Certificazioni





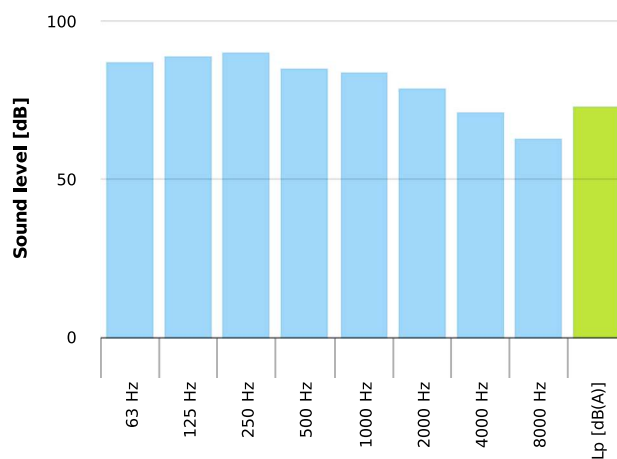


Table engines


Class IE	IE1	IE2	IE3
Size	112M	112M	112M
Power[kW]	4	4	4
Current[A]	8.26	8.23	8
Voltage[V]	400	400	400
Cos φ	0.84	0.81	0.82
n	0.857	0.866	0.886

Working point

Q [m ³ /h]	7976
P _{sta} [Pa]	1398.
P _{tot} [Pa]	1418.
P _{in} [kW] [W]	3656.
n _{sta}	0.847
n _{tot}	0.858
Rpm	1450

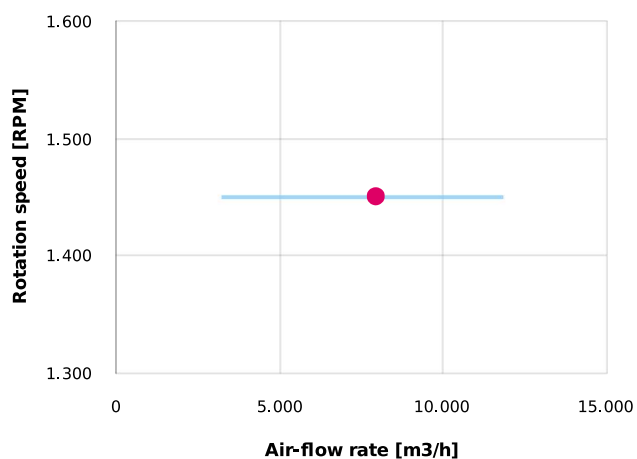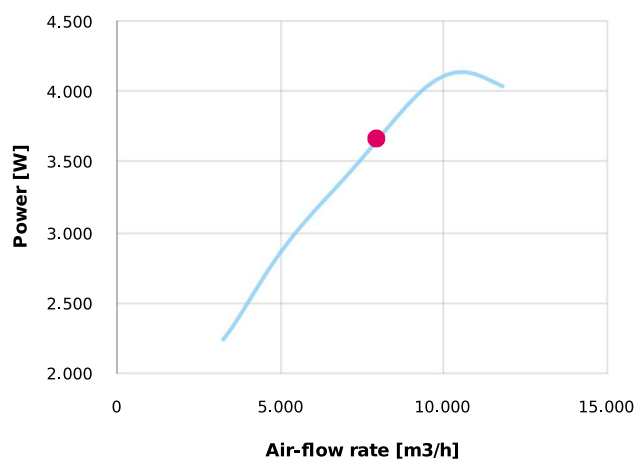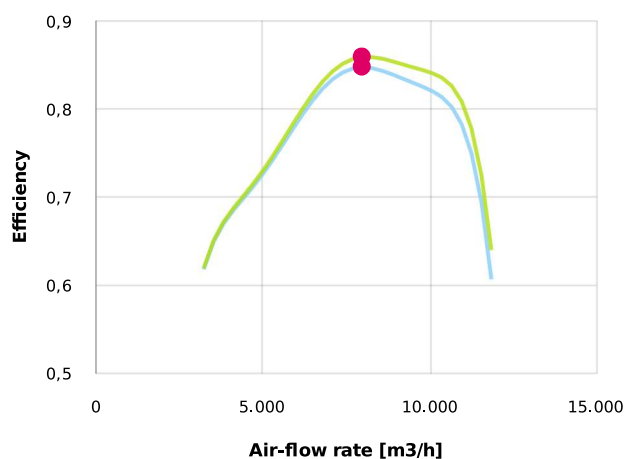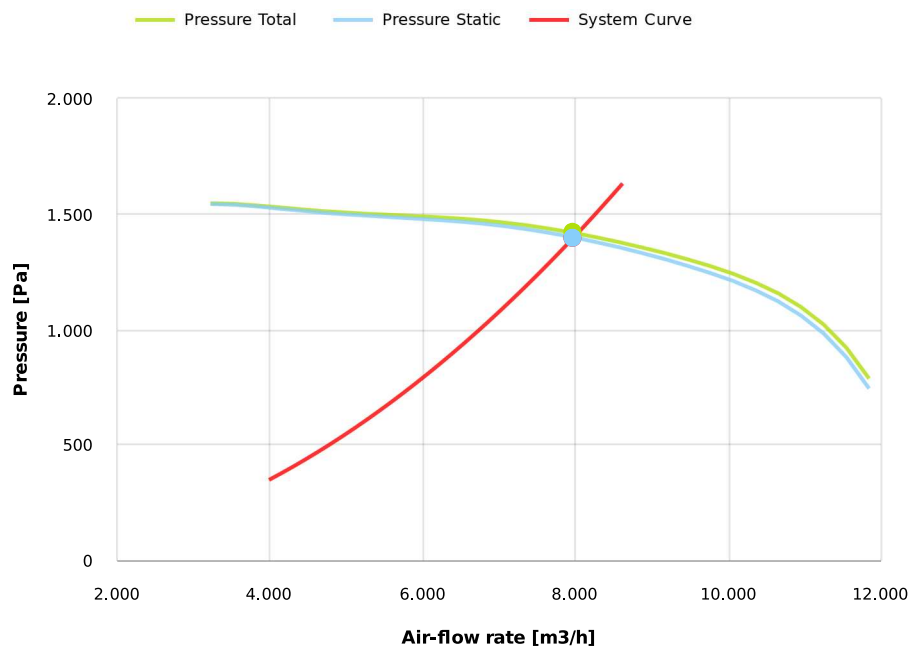

Dimensions

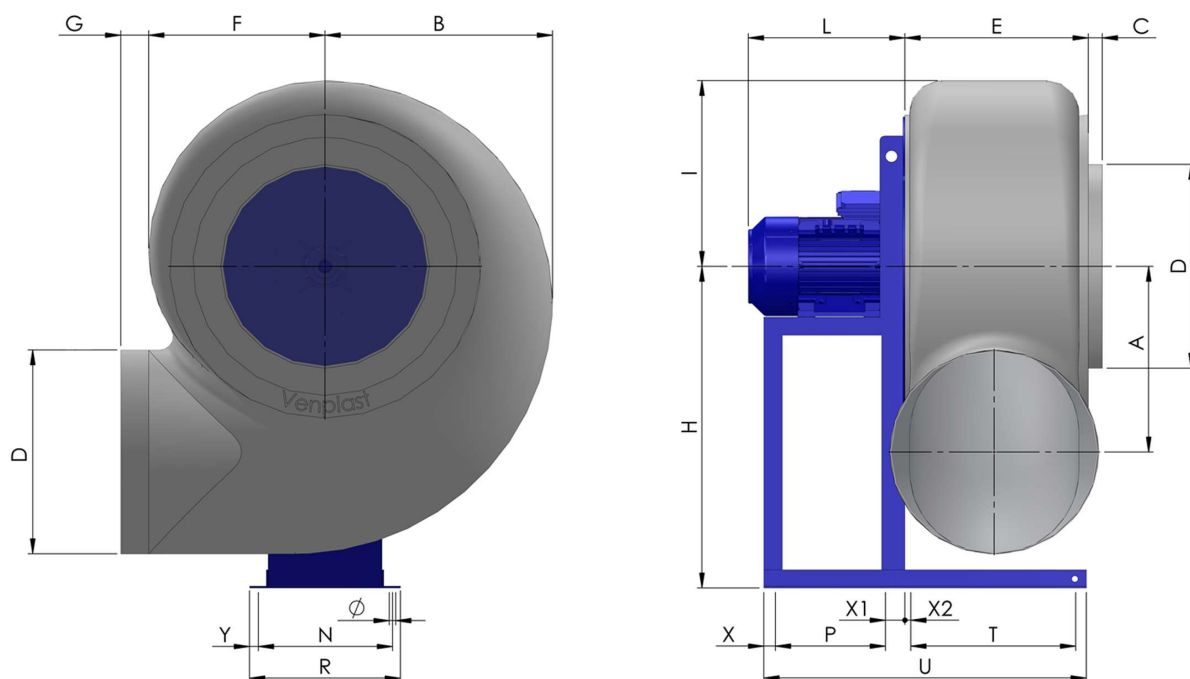

A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
445	610	50	500	415	420	80	800	505	340	337	14	237	373
T	U	X	X1	X2	Y								
400	740	25	40	15	18								

Configurations & cad

