


Research Data

Air-flow rate[m ³ /h]	34295
Pressure[Pa]	1157
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PR1006-ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	660
Frequency[Hz]	50
Speed[rpm]	950
Power[kW]	22
IP	55
INS	



PRL-Q1006-ATEX

PP-el antistatic welded housing - INOX/Fe+ebonite
welded impeller - epoxy painted motor support -
stainless steel screws

Certificazioni





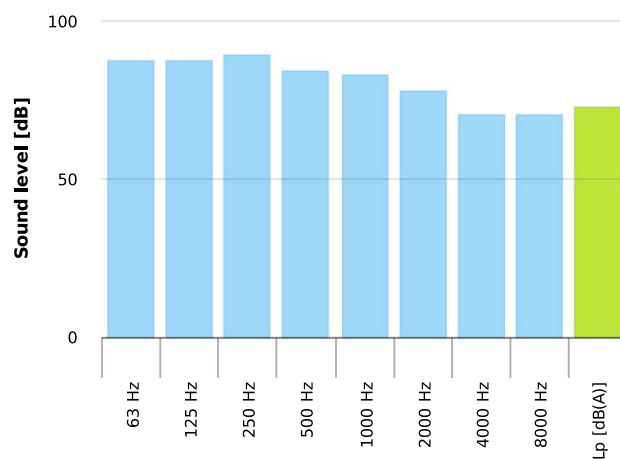


Table engines


Class IE	IE1	IE2	IE3
Size	200L	200L	200L
Power[kW]	22	22	22
Current[A]	42.5	42.1	43.1
Voltage[V]	400	400	400
Cos φ	0.83	0.83	0.8
n	0.9	0.909	0.922

Working point

Q [m ³ /h]	34295
P _{sta} [Pa]	1157
P _{tot} [Pa]	1330
P _{in} [kW] [W]	15463
n _{sta}	0.711
n _{tot}	0.817
Rpm	950

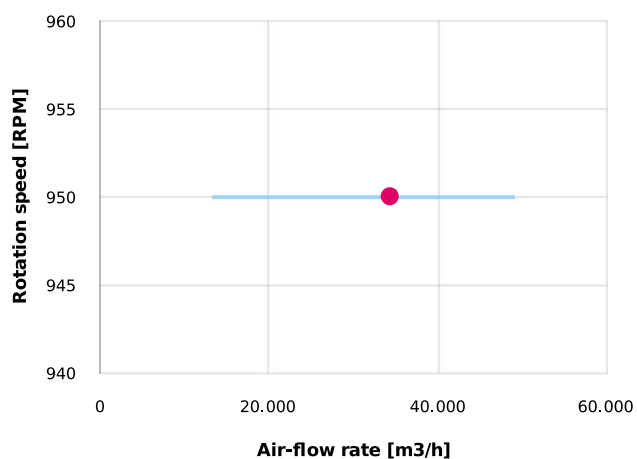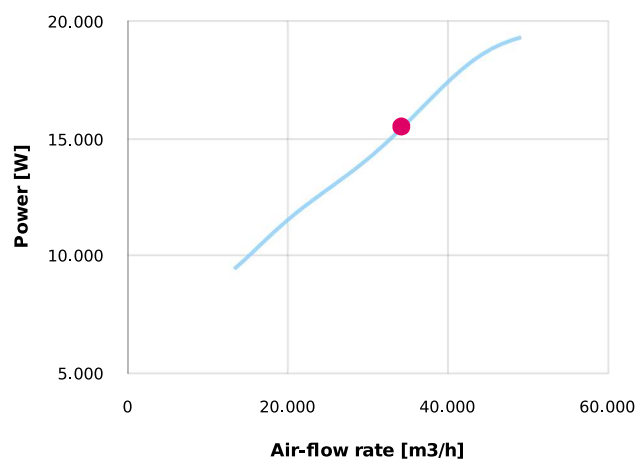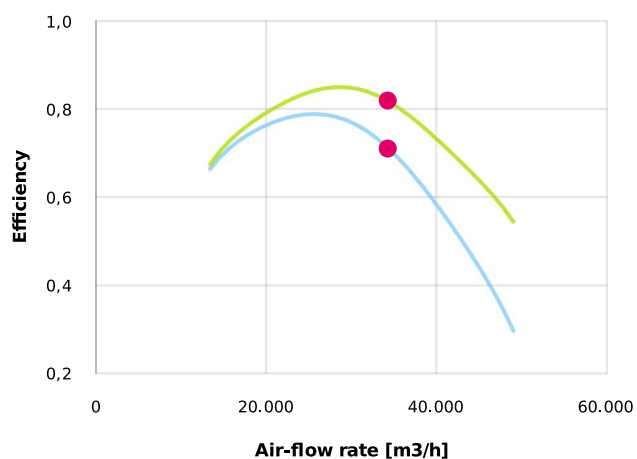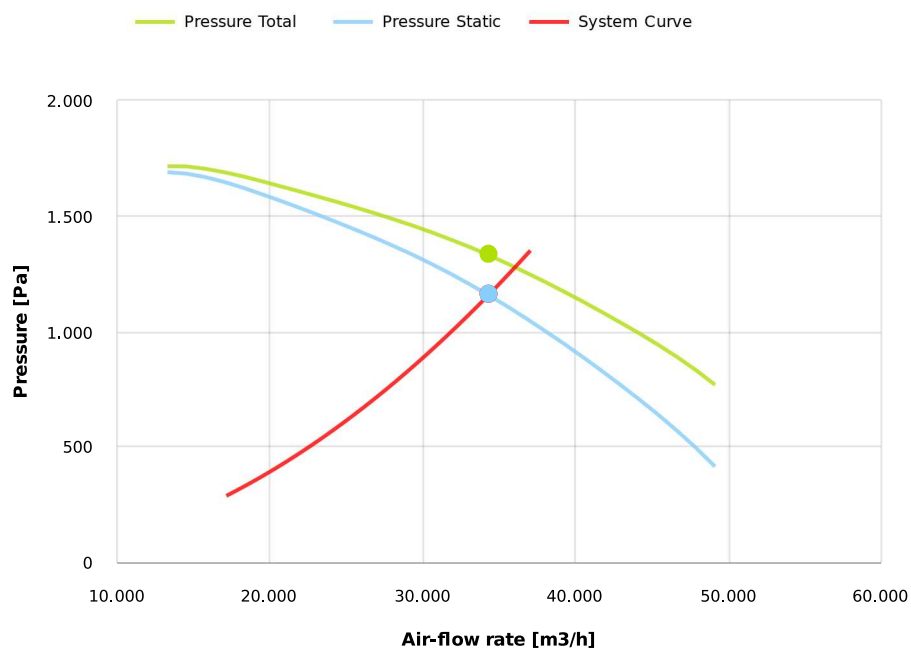

Dimensions

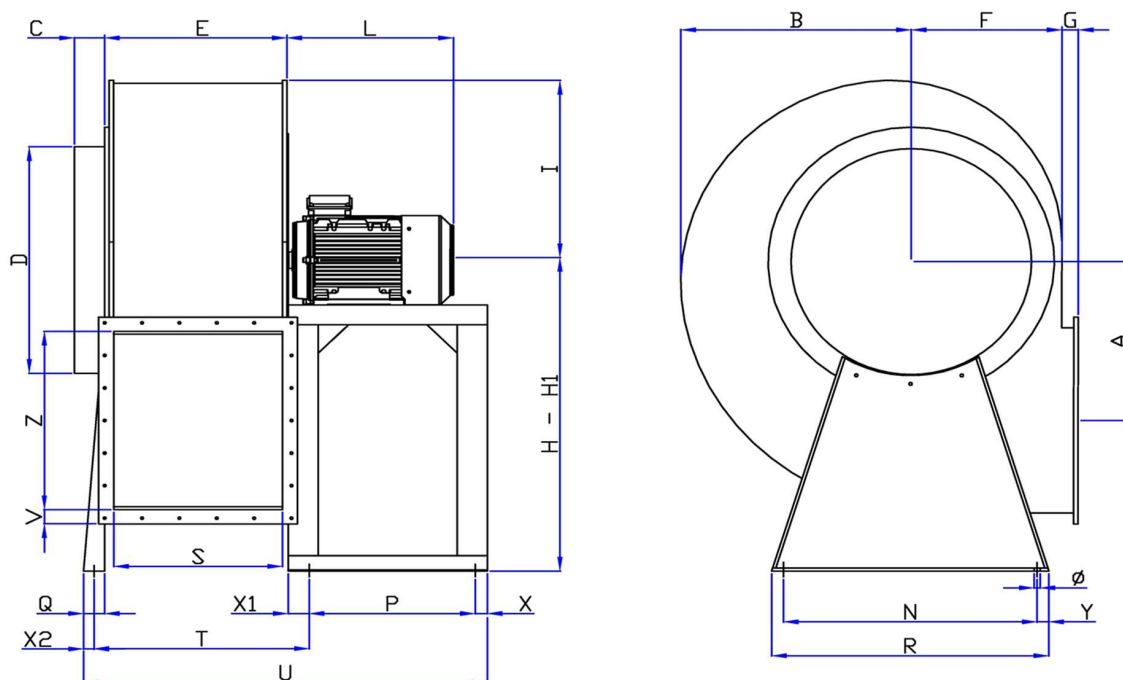

A	B	C	D	E	F	G	H	H1	I	L	N	Ø	P
710	985	120	1000	770	660	75	1180	980	840	670	1056	20	607
Q	R	S	T	U	V	X	X1	X2	Y	Z			
60	1134	710	840	1525	70	40	60	30	40	800			

Configurations & cad

