


Research Data

Air-flow rate[m ³ /h]	30590
Pressure[Pa]	1291
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PR1006
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	660
Frequency[Hz]	50
Speed[rpm]	950
Power[kW]	22
IP	55
INS	



PRL-Q1006

PP welded housing - INOX/Fe+ebonite impeller -
epoxy painted motor support - stainless steel screws

Certificazioni

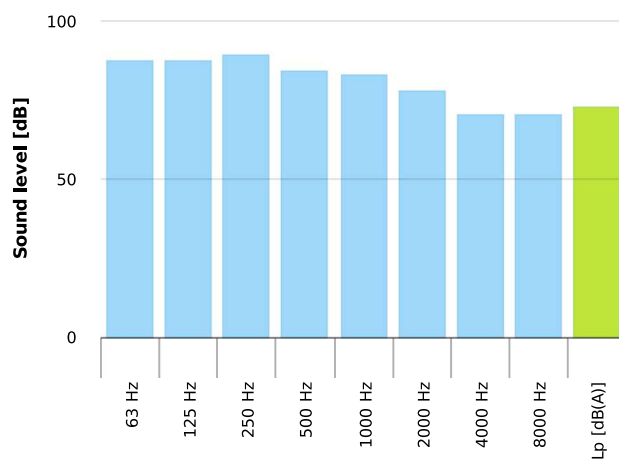
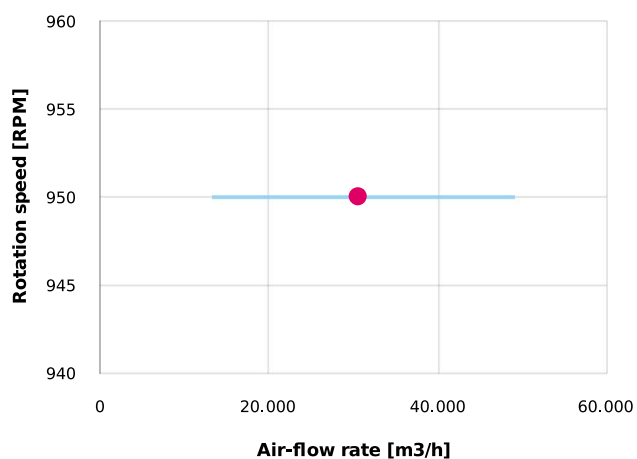
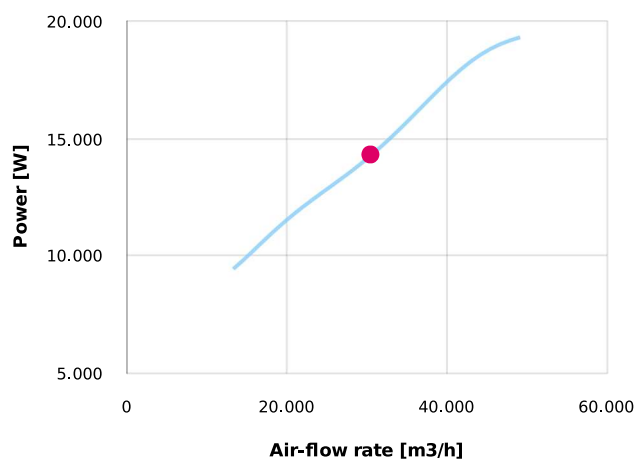
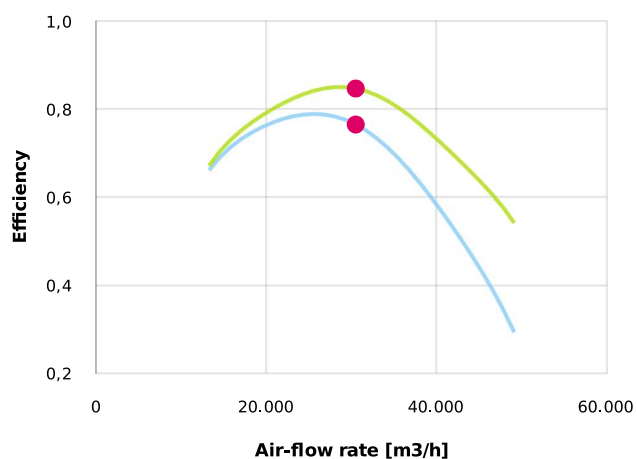
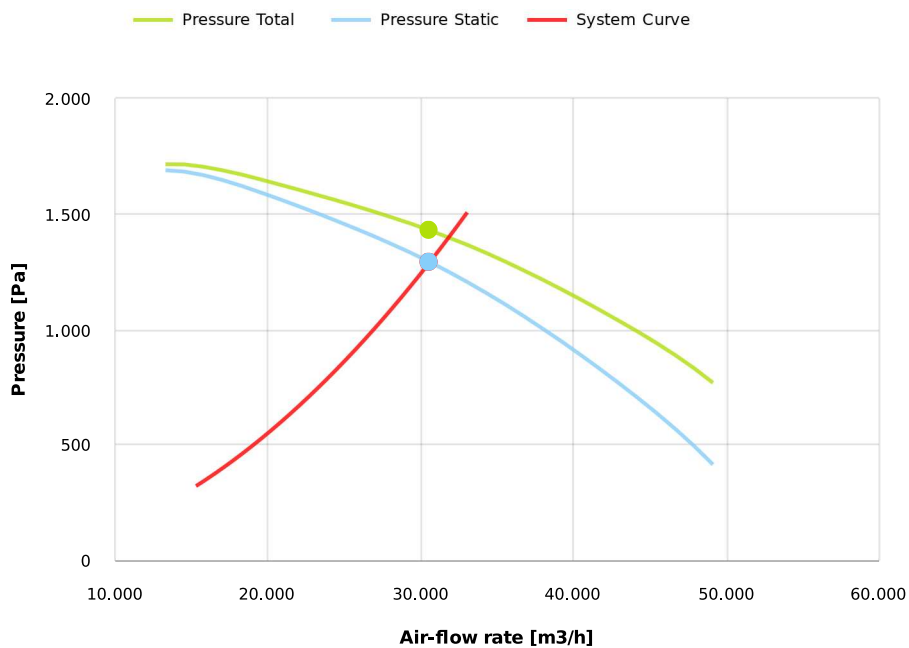


Table engines

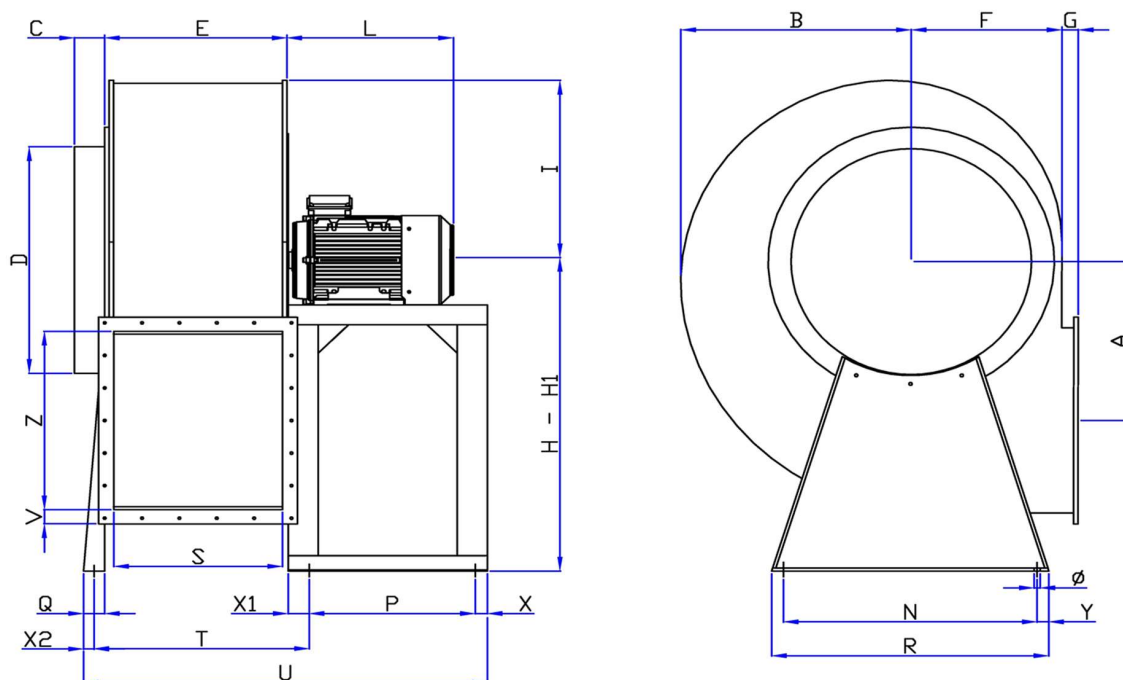
Class IE	IE1	IE2	IE3
Size	200L	200L	200L
Power[kW]	22	22	22
Current[A]	42.5	42.1	43.1
Voltage[V]	400	400	400
Cos φ	0.83	0.83	0.8
n	0.9	0.909	0.922

Working point

Q [m³/h]	30590
P_{sta} [Pa]	1291.
P_{tot} [Pa]	1428.
P_{in} [kW] [W]	14300
n_{sta}	0.764
n_{tot}	0.846
Rpm	950











Dimensions








A	B	C	D	E	F	G	H	H1	I	L	N	Ø	P
710	985	120	1000	770	660	75	1180	980	840	670	1056	20	607
Q	R	S	T	U	V	X	X1	X2	Y	Z			
60	1134	710	840	1525	70	40	60	30	40	800			

Configurations & cad

LG 0°

LG 45°

LG 90°

LG 135°

LG 180°

LG 225°

LG 270°

LG 315°

RD 0°

RD 45°

RD 90°

RD 135°

RD 180°

RD 225°

RD 270°

RD 315°
