


Research Data

Air-flow rate[m ³ /h]	68625
Pressure[Pa]	1524
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PR1408-ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	8
Weight[kg]	1640
Frequency[Hz]	50
Speed[rpm]	750
Power[kW]	55
IP	55
INS	



PRL-Q1408-ATEX

PP-el antistatic welded housing - INOX/Fe+ebonite
welded impeller - epoxy painted motor support -
stainless steel screws

Certificazioni

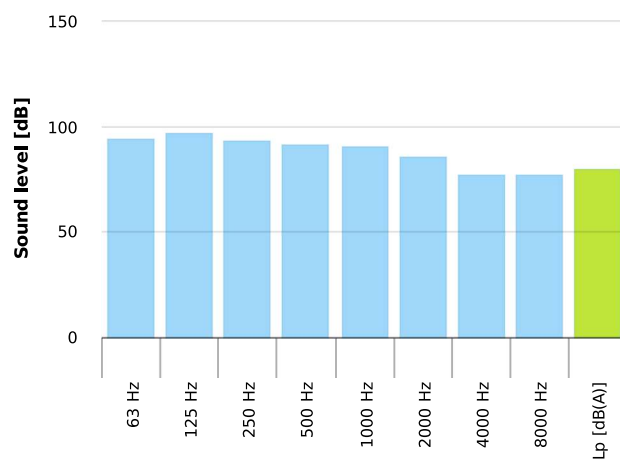
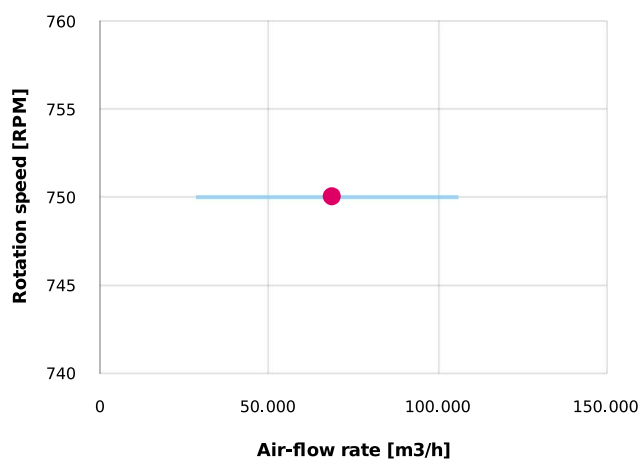
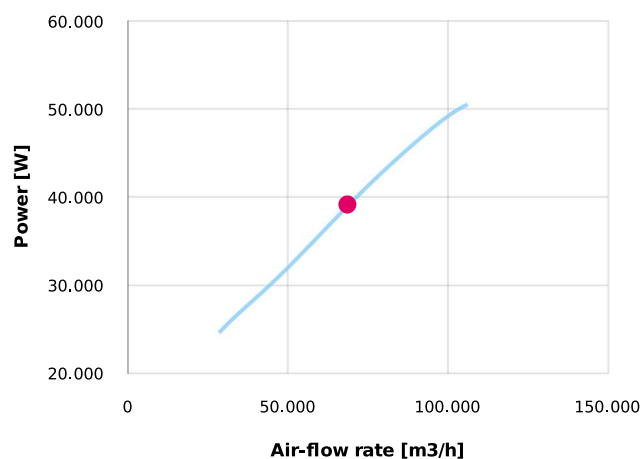
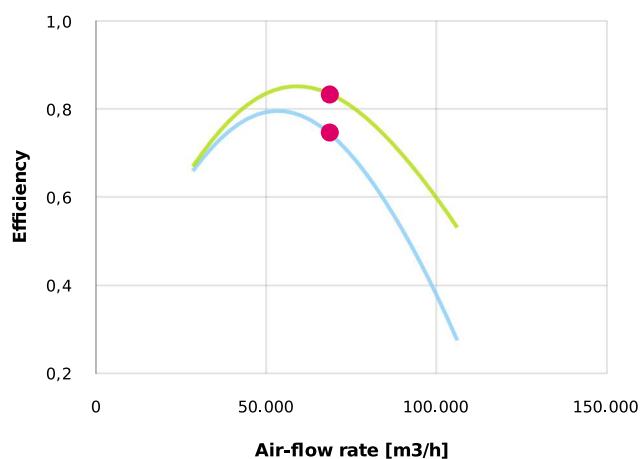
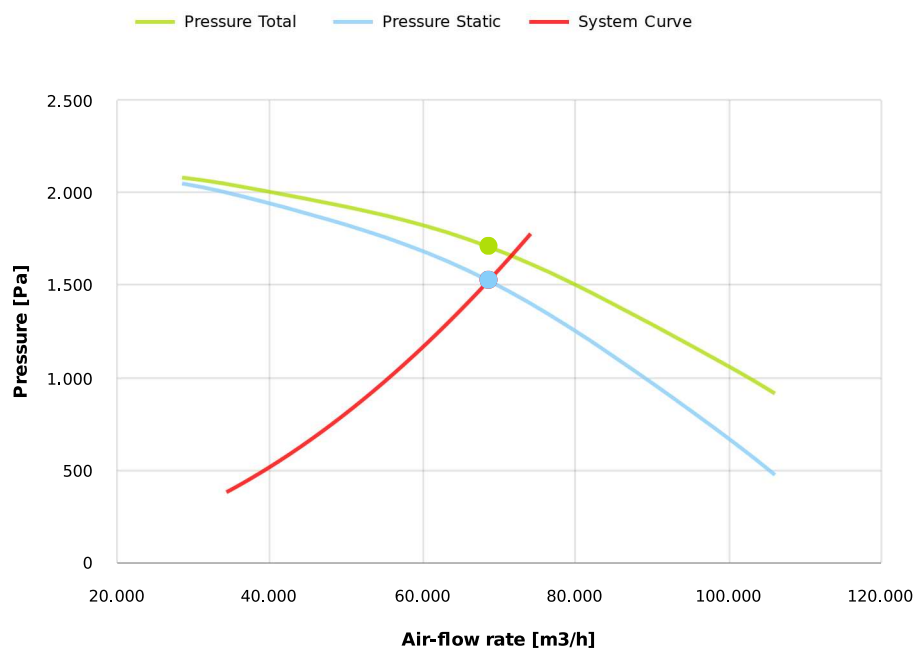


Table engines

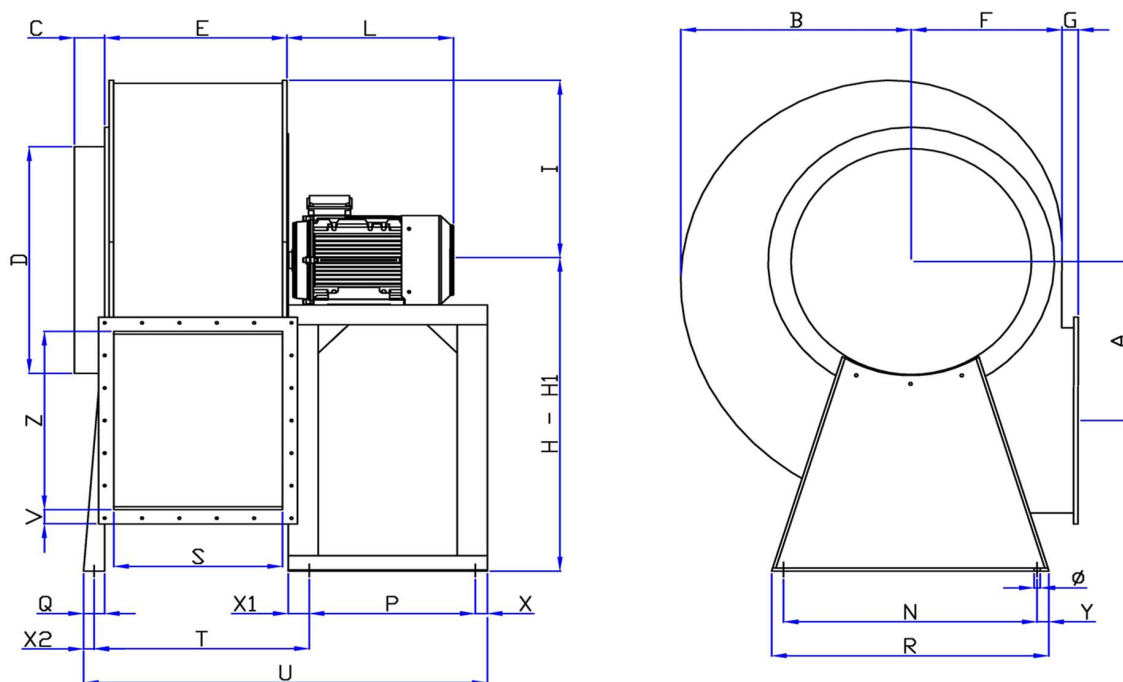
Class IE	IE1
Size	315S
Power[kW]	55
Current[A]	105.6
Voltage[V]	400
Cos φ	0.81
n	0.928

Working point

Q [m ³ /h]	68625
P _{sta} [Pa]	1524.
P _{tot} [Pa]	1707.
P _{in} [kW] [W]	38985
n _{sta}	0.744
n _{tot}	0.834
Rpm	750


















Dimensions



A	B	C	D	E	F	G	H	H1	I	L	N	Ø	P
1020	1350	150	1400	1080	875	125	1700	1350	1120	1160	1450	24	760
Q	R	S	T	U	V	X	X1	X2	Y	Z			
60	1528	1000	1140	1978	80	40	60	30	40	1100			

Configurations & cad

LG 0°

LG 45°

LG 90°

LG 135°

LG 180°

LG 225°

LG 270°

LG 315°

RD 0°

RD 45°

RD 90°

RD 135°

RD 180°

RD 225°

RD 270°

RD 315°
