


Research Data

Air-flow rate[m ³ /h]	8919
Pressure[Pa]	486.5
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PR716-ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	460
Frequency[Hz]	50
Speed[rpm]	900
Power[kW]	4
IP	55
INS	



PRL-Q716-ATEX

PP-el antistatic welded housing - PP/INOX/Fe+ebonite
welded impeller - epoxy painted motor support -
stainless steel screws

Certificazioni

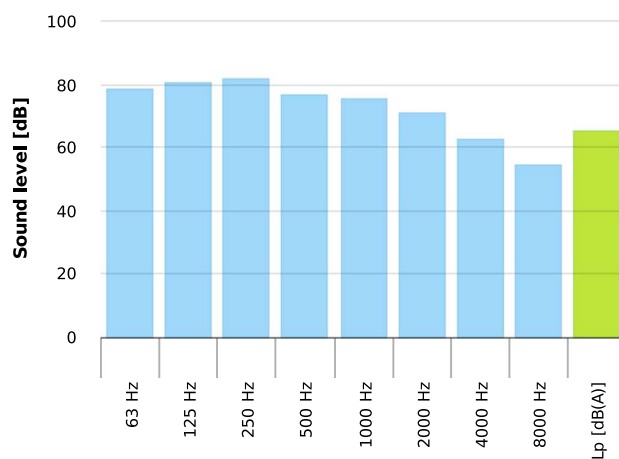
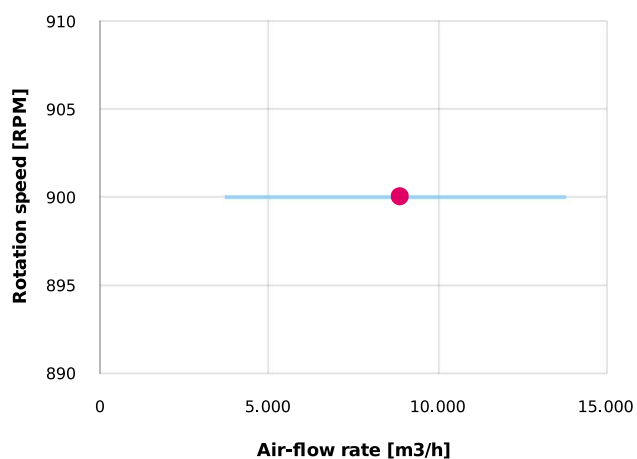
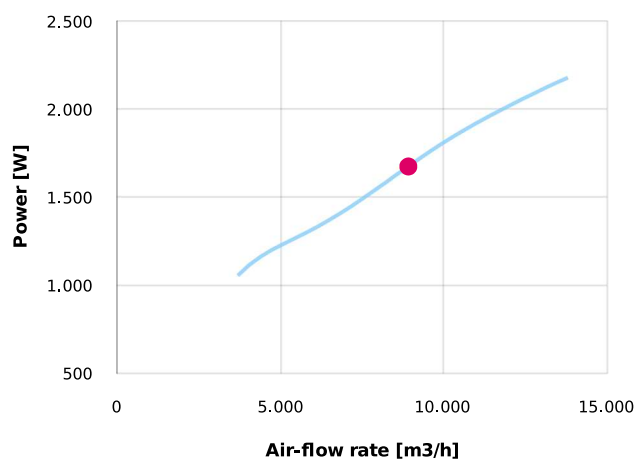
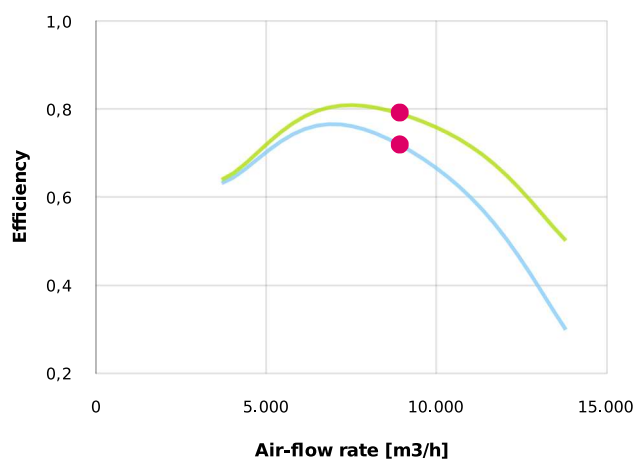
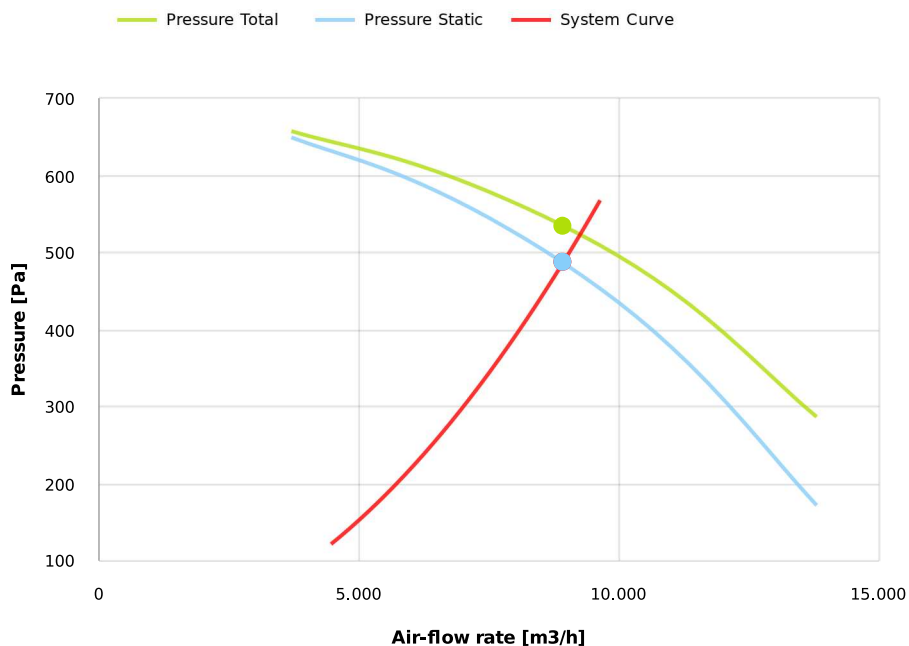


Table engines

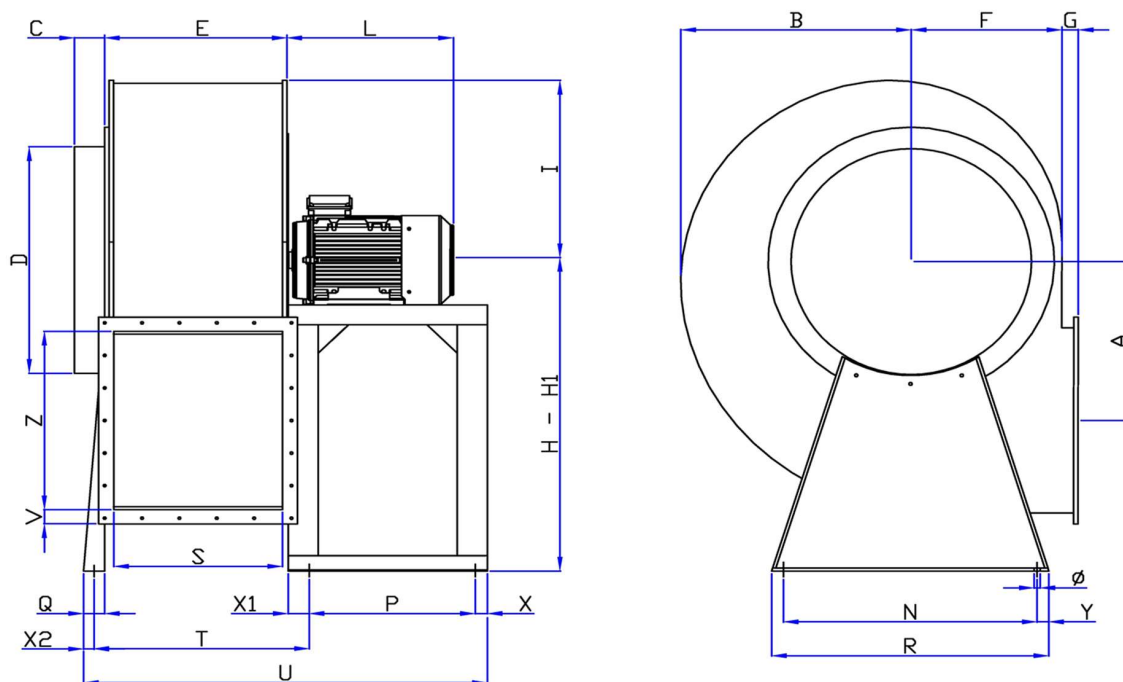
Class IE	IE1	IE2	IE3
Size	132M	132M	132M
Power[kW]	4	4	4
Current[A]	9.44	9.1	9
Voltage[V]	400	400	400
Cos φ	0.76	0.75	0.74
n	0.805	0.846	0.868

Working point

Q [m ³ /h]	8919
P _{sta} [Pa]	486.5
P _{tot} [Pa]	534.5
P _{in} [kW] [W]	1675.
n _{sta}	0.718
n _{tot}	0.789
Rpm	900



Dimensions















A	B	C	D	E	F	G	H	H1	I	L	N	Ø	P
500	690	100	700	545	440	75	850	700	570	420	772	20	551
Q	R	S	T	U	V	X	X1	X2	Y	Z			
60	835	500	560	1299	60	40	60	30	40	560			

Configurations & cad

LG 0°

LG 45°

LG 90°

LG 135°

LG 180°

LG 225°

LG 270°

LG 315°

RD 0°

RD 45°

RD 90°

RD 135°

RD 180°

RD 225°

RD 270°

RD 315°
