


Research Data

Air-flow rate[m ³ /h]	22546
Pressure[Pa]	1006
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PR906-ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	605
Frequency[Hz]	50
Speed[rpm]	950
Power[kW]	15
IP	55
INS	



PRL-Q906-ATEX

PP-el antistatic welded housing - PP/INOX/Fe+ebonite
welded impeller - epoxy painted motor support -
stainless steel screws

Certificazioni





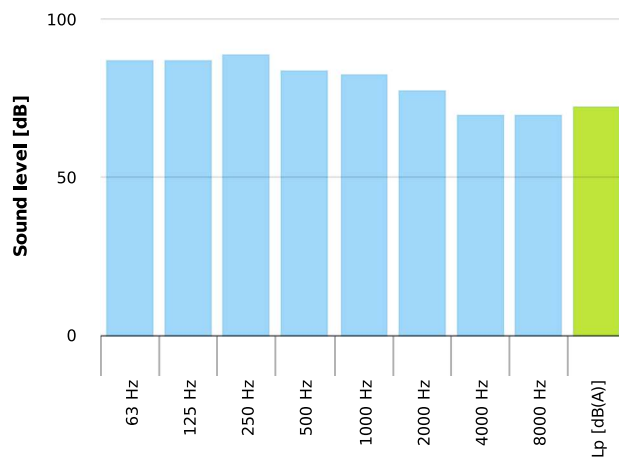


Table engines


Class IE	IE1	IE2	IE3
Size	180L	180L	180L
Power[kW]	15	15	15
Current[A]	30	29.1	28.6
Voltage[V]	400	400	400
Cos φ	0.81	0.83	0.83
n	0.89	0.897	0.912

Working point

Q [m ³ /h]	22546
P _{sta} [Pa]	1006.
P _{tot} [Pa]	1126.
P _{in} [kW] [W]	8591.
n _{sta}	0.732
n _{tot}	0.82
Rpm	950

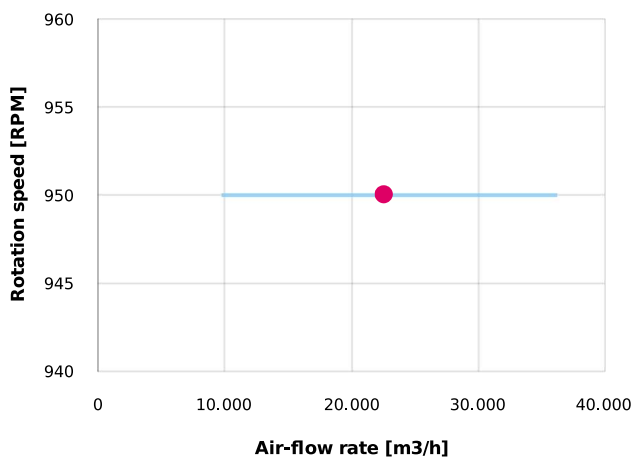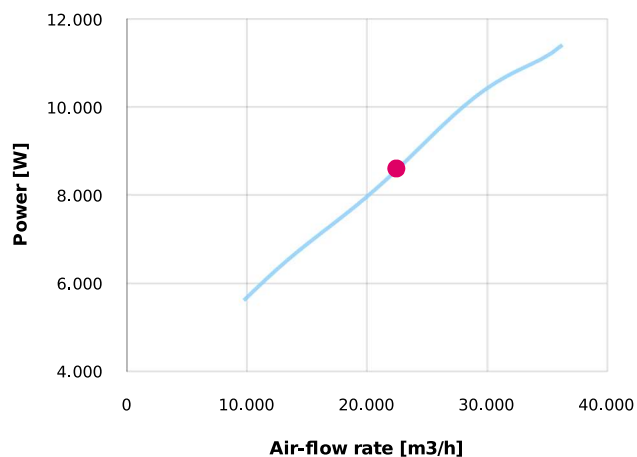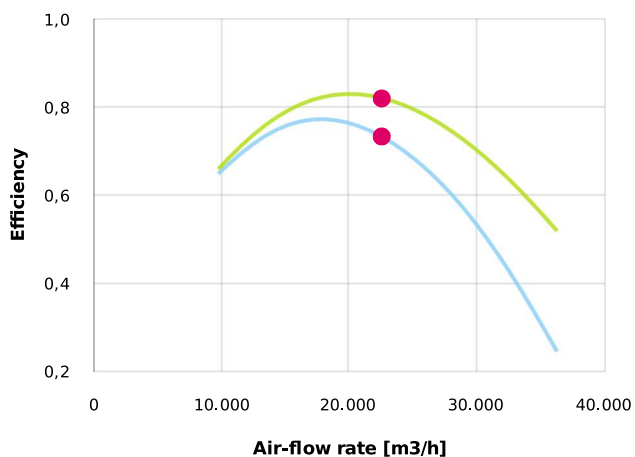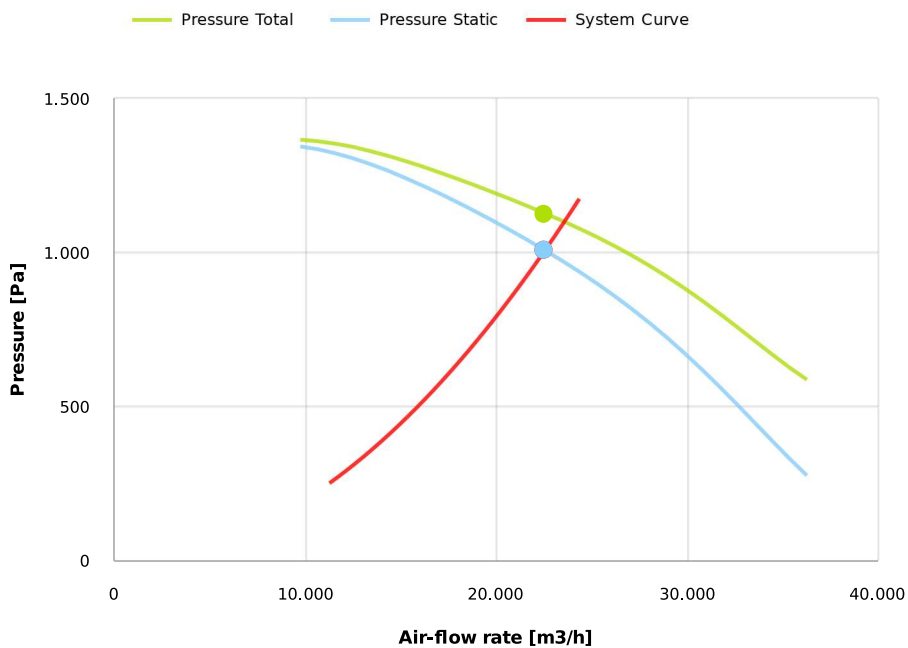


Dimensions

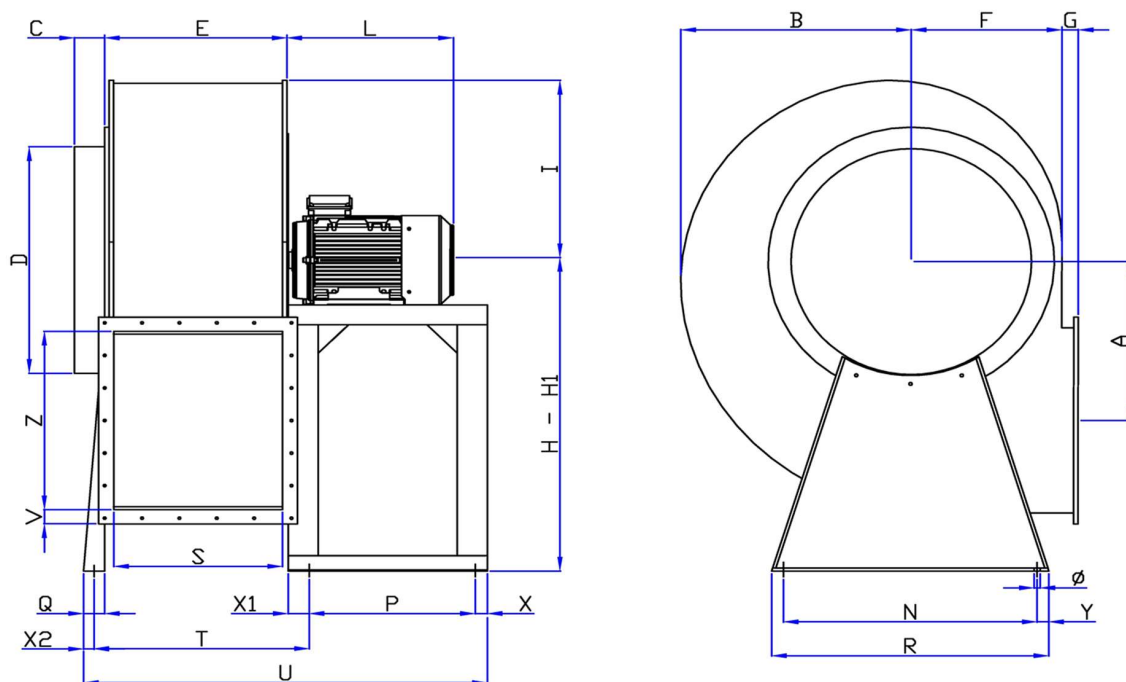


A	B	C	D	E	F	G	H	H1	I	KG*	L	N	Ø
630	870	100	900	680	590	75	1060	870	720	605	580	962	20
P	Q	R	S	T	U	V	X	X1	X2	Y	Z		
551	60	1025	630	760	1389	60	40	60	30	40	710		

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

