


Research Data

Air-flow rate[m ³ /h]	15718
Pressure[Pa]	3426
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PR562
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	230
Frequency[Hz]	50
Speed[rpm]	2850
Power[kW]	22
IP	55
INS	



PRL562

Pe moulded housing - PP/INOX/Fe+ebonite impeller - epoxy painted motor support - stainless steel screws

Certificazioni

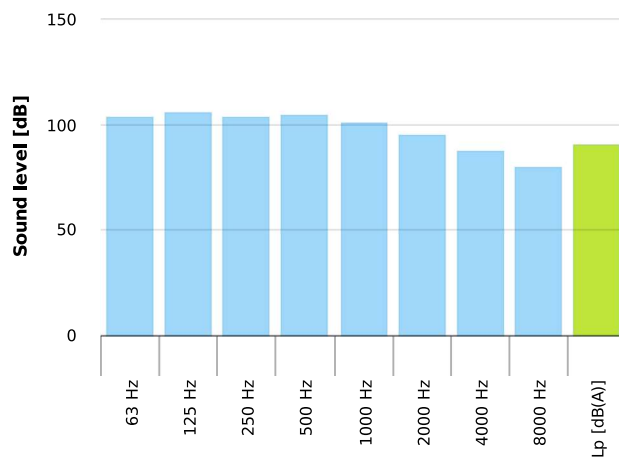
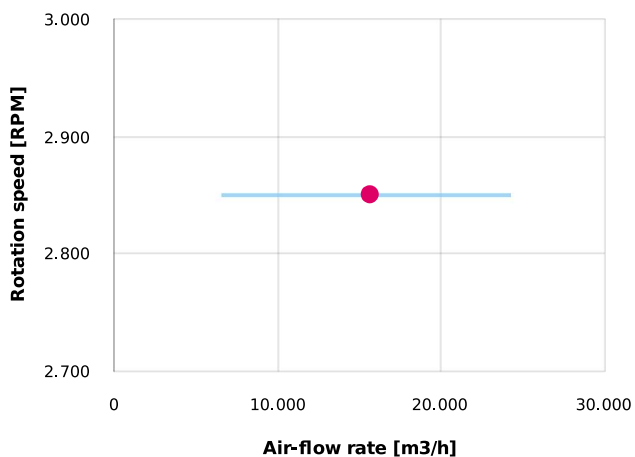
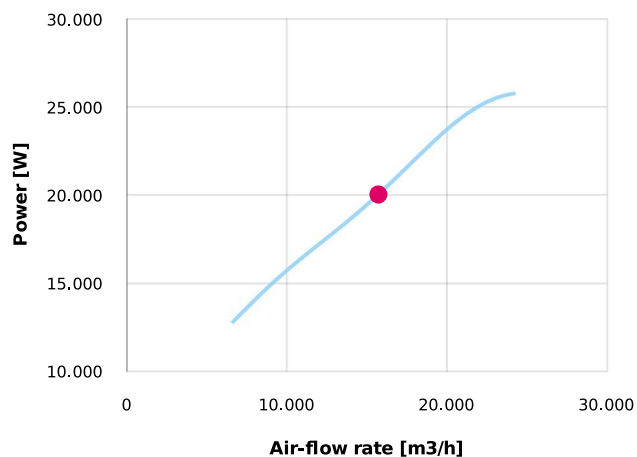
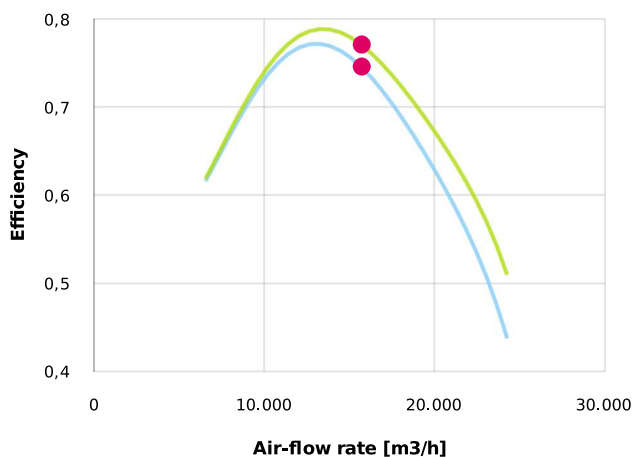
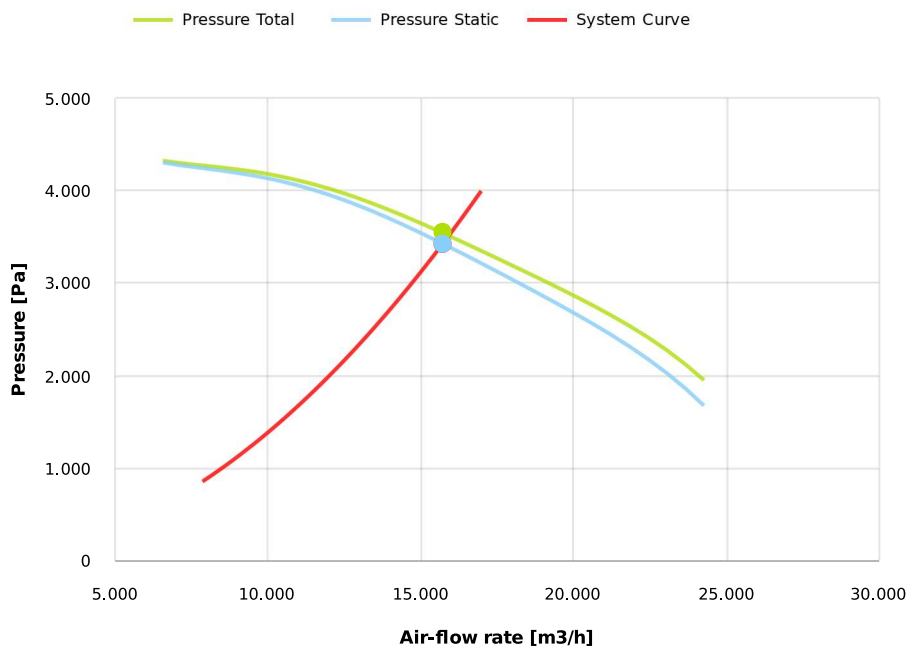


Table engines

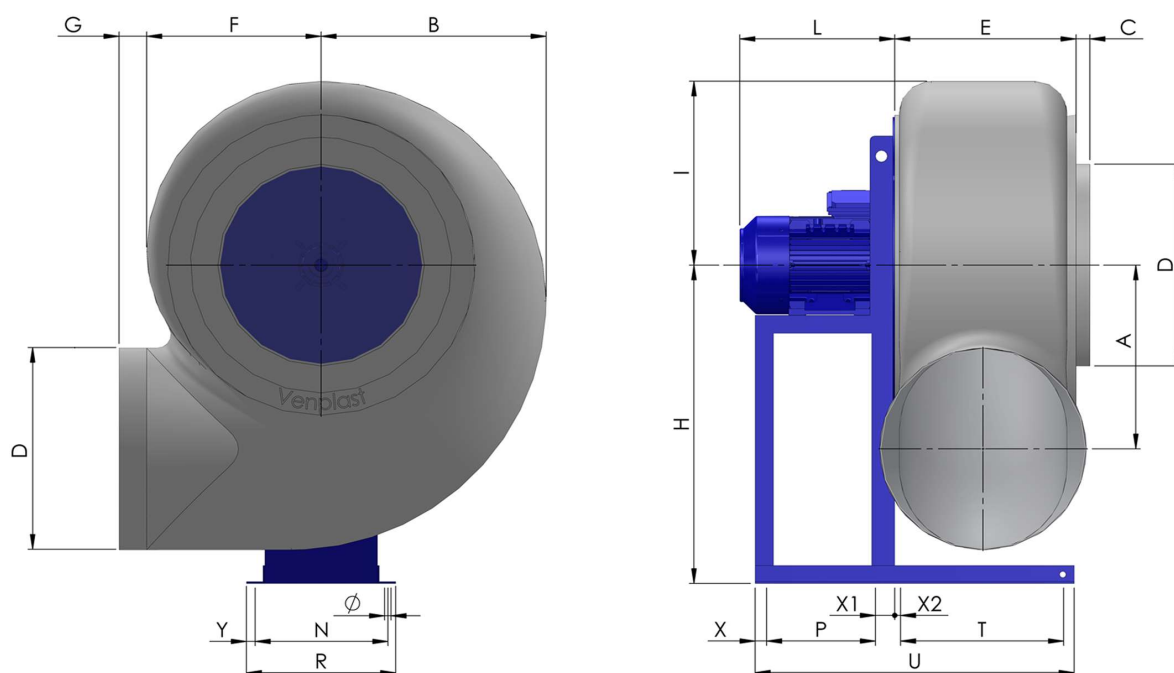
Class IE	IE1	IE2	IE3
Size	180M	180M	180M
Power[kW]	22	22	22
Current[A]	39.2	38.2	37.6
Voltage[V]	400	400	400
Cos φ	0.9	0.91	0.91
n	0.9	0.913	0.927

Working point

Q [m³/h]	15718
P_{sta} [Pa]	3426.
P_{tot} [Pa]	3542.
P_{in} [kW] [W]	20047
n_{sta}	0.745
n_{tot}	0.77
Rpm	2850











Dimensions








A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
410	490	50	450	365	380	80	710	410	620	445	14	437	481
T	U	X	X1	X2	Y								
355	895	25	40	15	18								

Configurations & cad

LG 0°

LG 45°

LG 90°

LG 135°

LG 180°

LG 225°

LG 270°

LG 315°

RD 0°

RD 45°

RD 90°

RD 135°

RD 180°

RD 225°

RD 270°

RD 315°
