


Research Data

Air-flow rate[m ³ /h]	21660
Pressure[Pa]	4461
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PR632
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	210
Frequency[Hz]	50
Speed[rpm]	2850
Power[kW]	30
IP	55
INS	


PRL632

Pe moulded housing - PP/INOX/Fe+ebonite impeller - epoxy painted motor support - stainless steel screws

Certificazioni

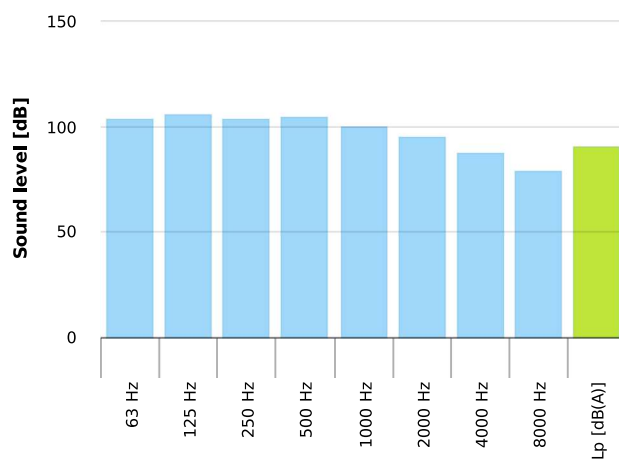
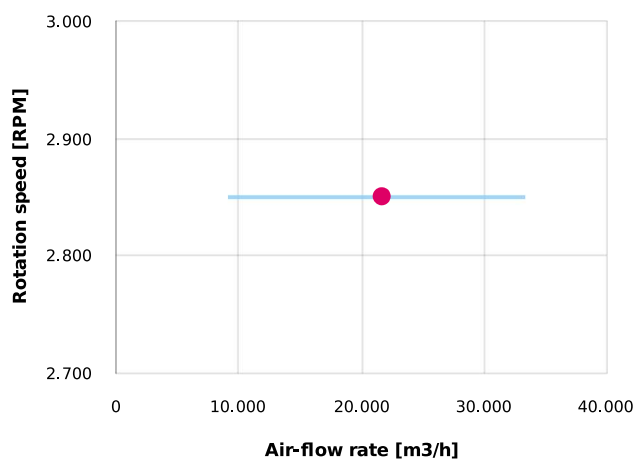
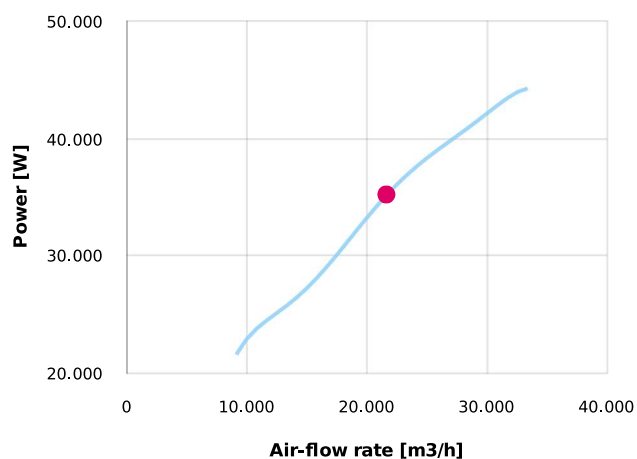
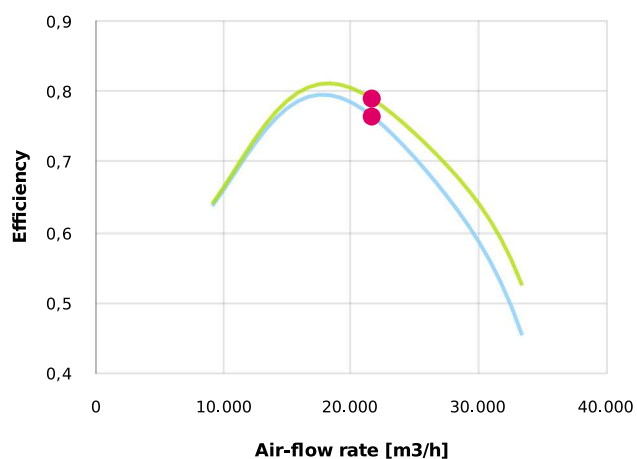
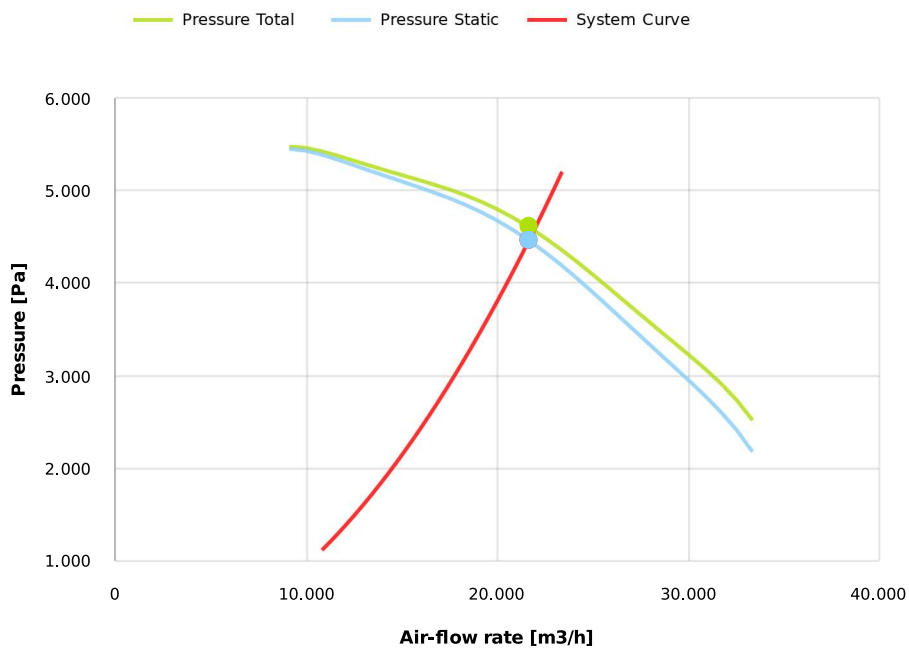


Table engines

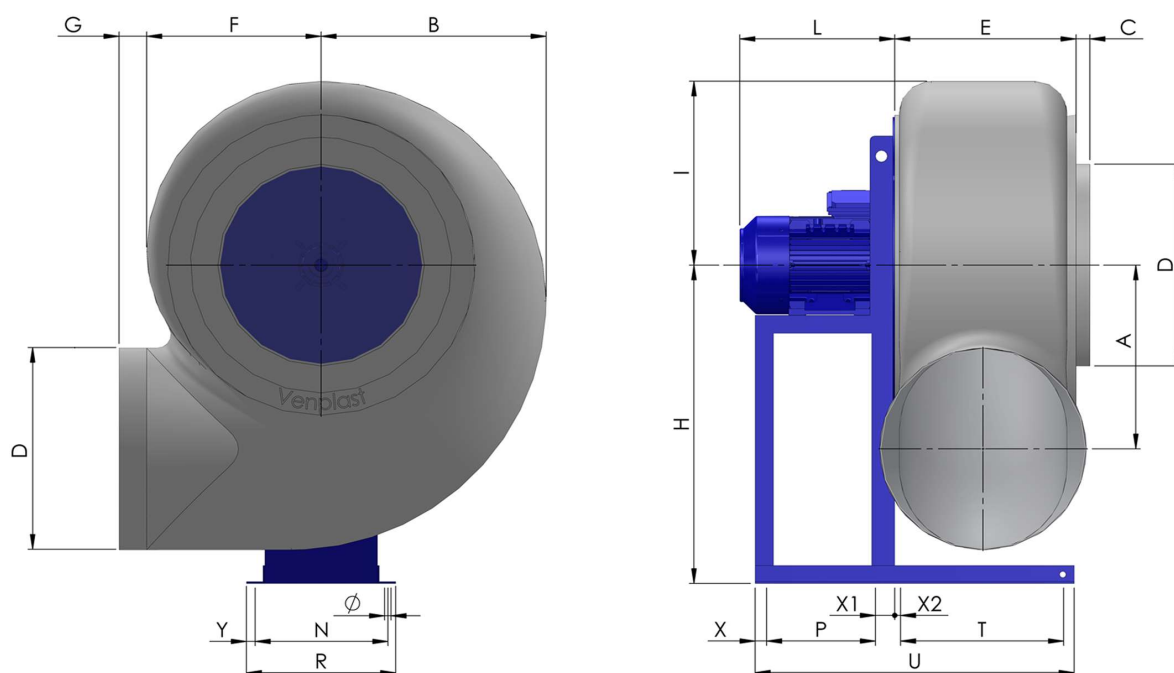
Class IE	IE1	IE2	IE3
Size	200L	200L	200L
Power[kW]	30	30	30
Current[A]	52.8	51.7	51.6
Voltage[V]	400	400	400
Cos φ	0.9	0.91	0.9
n	0.912	0.92	0.933

Working point

Q [m³/h]	21660
P_{sta} [Pa]	4461.
P_{tot} [Pa]	4605.
P_{in} [kW] [W]	35200
n_{sta}	0.764
n_{tot}	0.788
Rpm	2850











Dimensions








A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
445	610	50	500	415	420	80	800	505	635	545	14	520	581
T			U			X		X1		X2		Y	
400			1023			25		40		15		18	

Configurations & cad

LG 0°

LG 45°

LG 90°

LG 135°

LG 180°

LG 225°

LG 270°

LG 315°

RD 0°

RD 45°

RD 90°

RD 135°

RD 180°

RD 225°

RD 270°

RD 315°
