


Research Data

Air-flow rate[m ³ /h]	7498
Pressure[Pa]	481.7
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PR636
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	102
Frequency[Hz]	50
Speed[rpm]	950
Power[kW]	2.2
IP	55
INS	



PRL636

Pe moulded housing - PP/INOX/Fe+ebonite impeller - epoxy painted motor support - stainless steel screws

Certificazioni





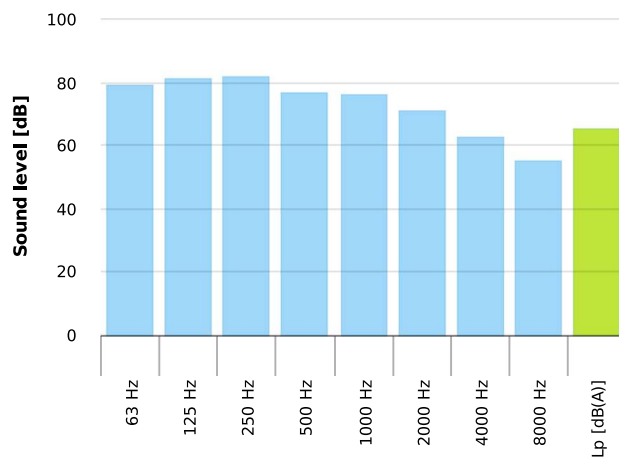


Table engines


Class IE	IE1	IE2	IE3
Size	112M	112M	112M
Power[kW]	2.2	2.2	2.2
Current[A]	5.43	5.18	5.3
Voltage[V]	400	400	400
Cos φ	0.76	0.75	0.72
n	0.77	0.818	0.843

Working point

Q [m3/h]	7498
Psta [Pa]	481.7
Ptot [Pa]	499.0
Pin [kW] [W]	1336.
nsta	0.751
ntot	0.778
Rpm	950

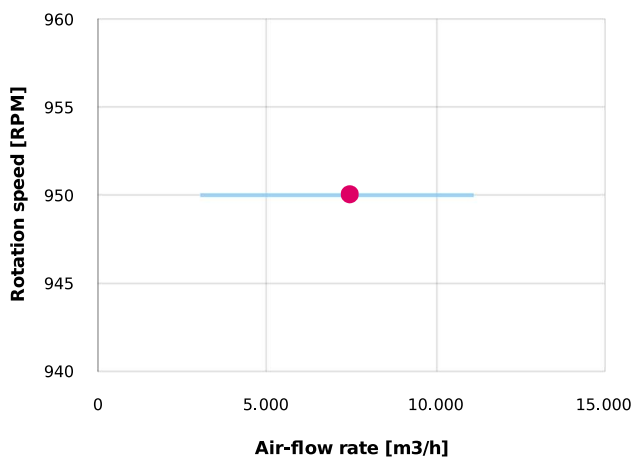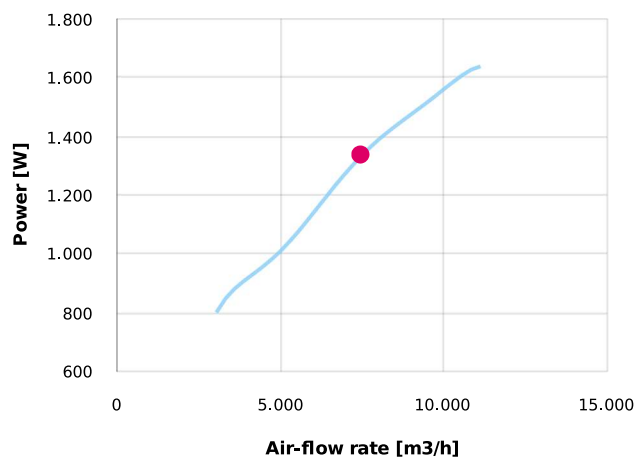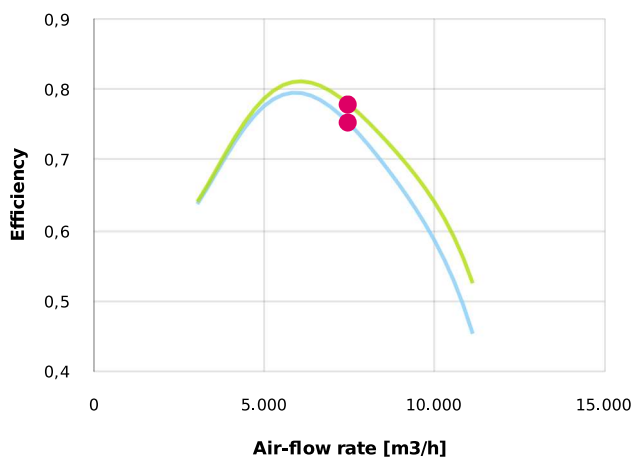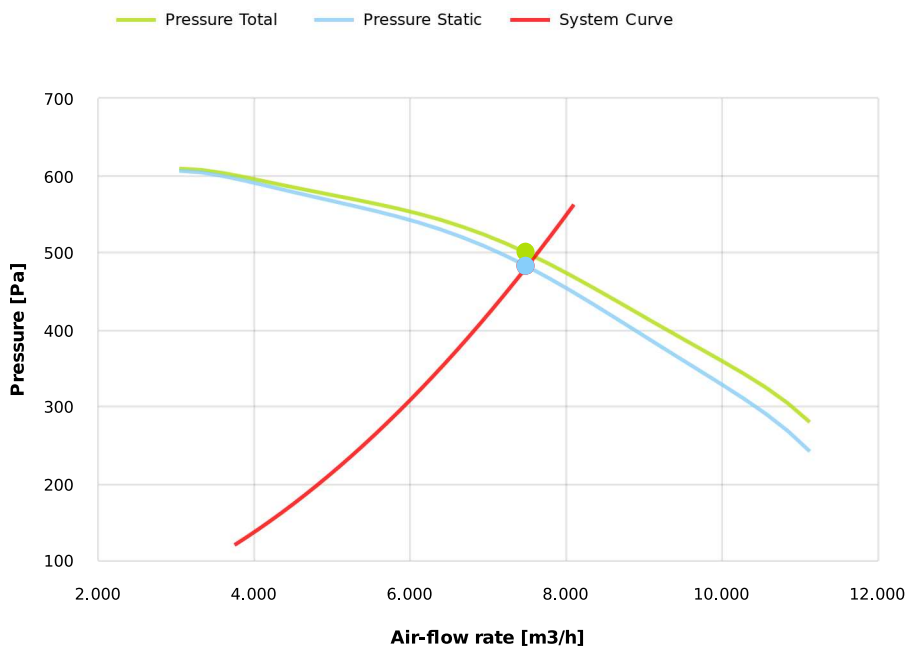

Dimensions

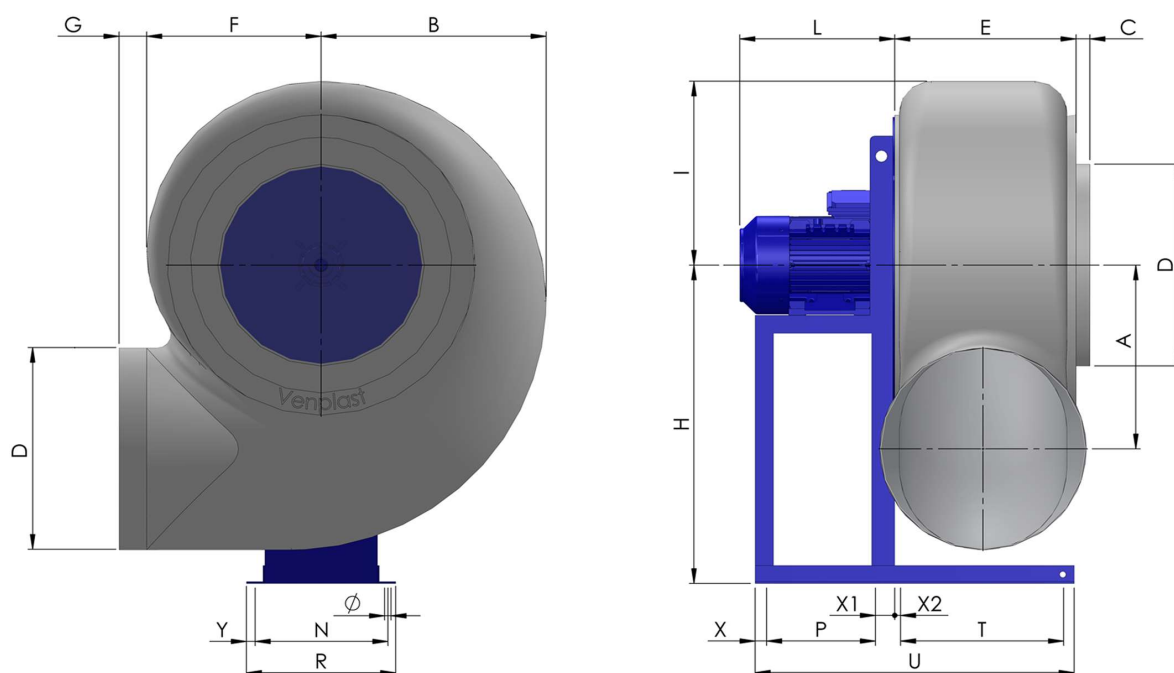

A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
445	610	50	500	415	420	80	800	505	340	337	14	270	373
T			U			X		X1		X2		Y	
400			773			25		40		15		18	

Configurations & cad

