


Research Data

Air-flow rate[m ³ /h]	407
Pressure[Pa]	64.7
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P204
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	9
Frequency[Hz]	50
Speed[rpm]	1370
Power[kW]	0.12
IP	55
INS	



PRU204

Pe moulded housing - PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni

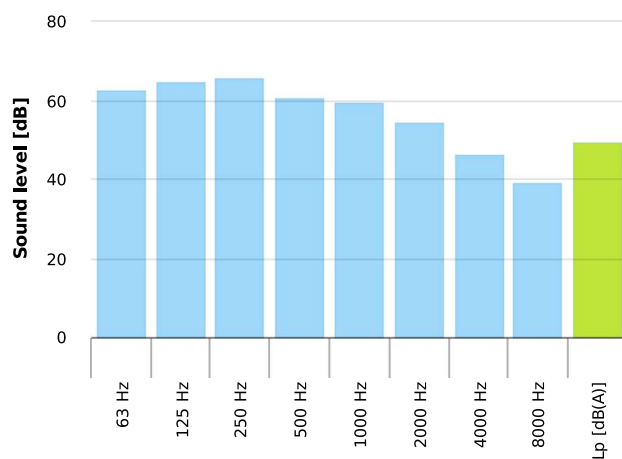
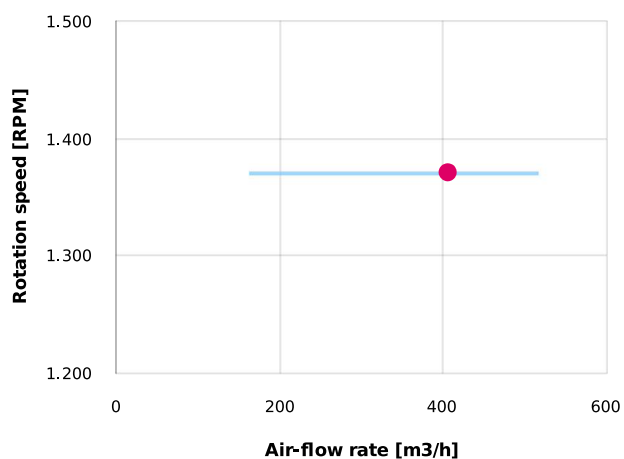
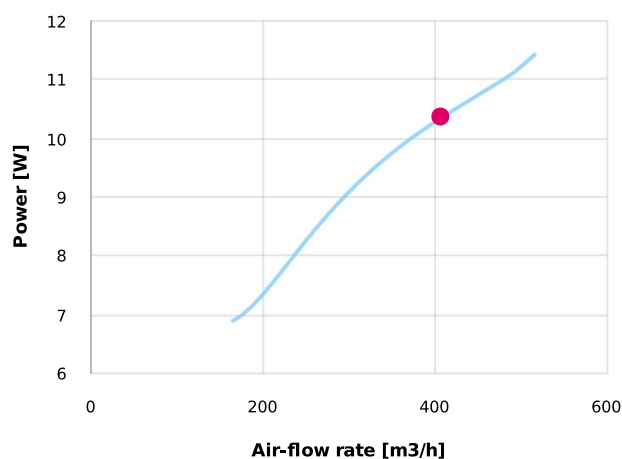
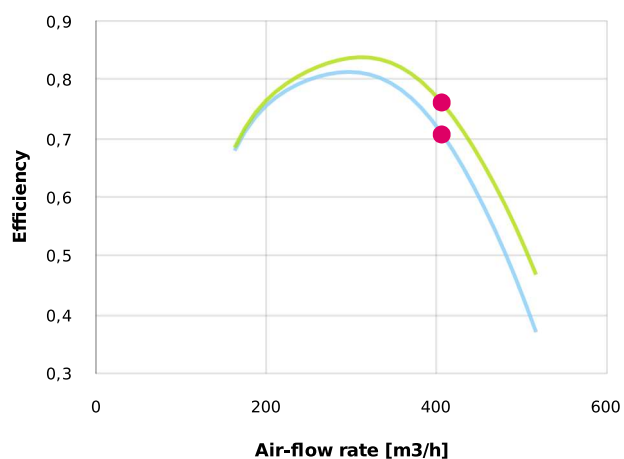
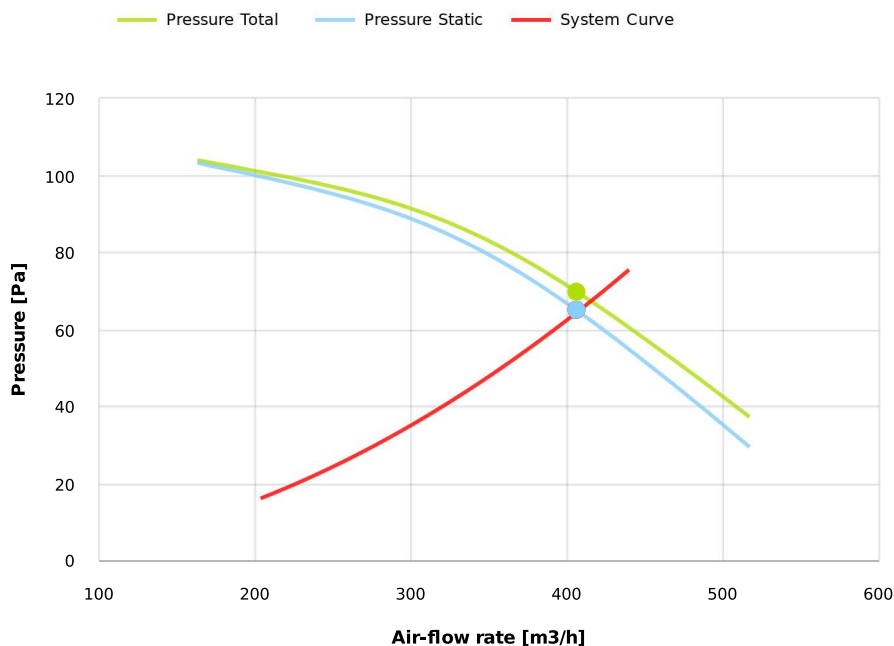


Table engines

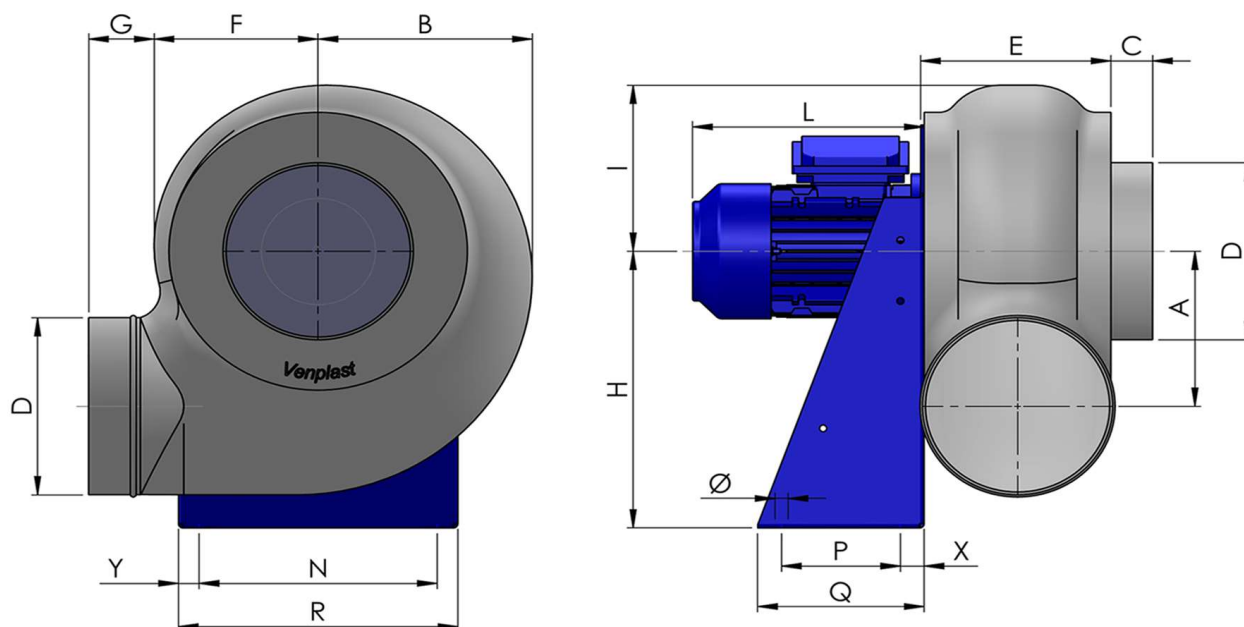
Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.47
Voltage[V]	400
Cos φ	0.64
n	0.57

Working point

Q [m³/h]	407
Psta [Pa]	64.70
Ptot [Pa]	69.54
Pin [kW] [W]	10.35
nsta	0.706
ntot	0.759
Rpm	1370


















Dimensions



A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
140	180	35	160	160	138	55	250	150	190	200	11	100	140
R				X				Y					
235				20				17.5					

Configurations & cad

LG 0°

LG 45°

LG 90°

LG 135°

LG 180°

LG 225°

LG 270°

LG 315°

RD 0°

RD 45°

RD 90°

RD 135°

RD 180°

RD 225°

RD 270°

RD 315°
