


Research Data

Air-flow rate[m ³ /h]	1413
Pressure[Pa]	550.6
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P252
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	13
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	0.37
IP	55
INS	



PRU252

Pe moulded housing - PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





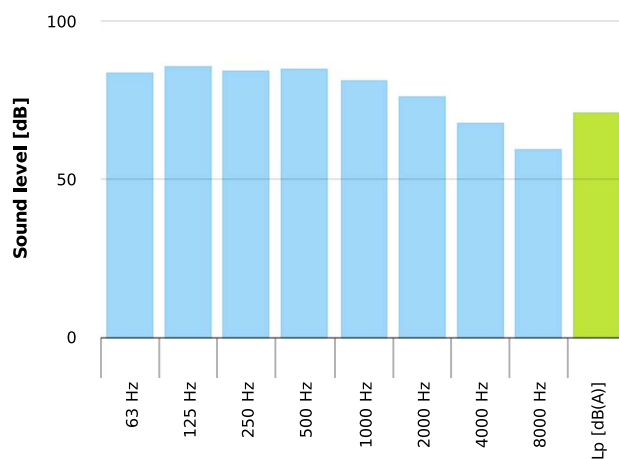


Table engines


Class IE	IE1
Size	63
Power[kW]	0.37
Current[A]	1.05
Voltage[V]	400
Cos φ	0.78
n	0.65

Working point

Q [m3/h]	1413
Psta [Pa]	550.6
Ptot [Pa]	574.5
Pin [kW] [W]	280.8
nsta	0.768
ntot	0.802
Rpm	2800

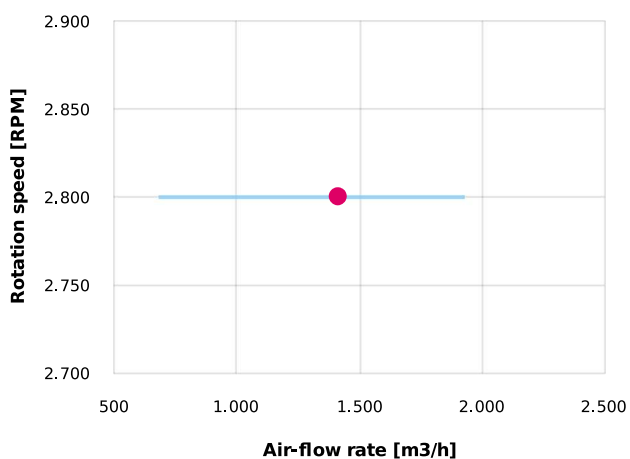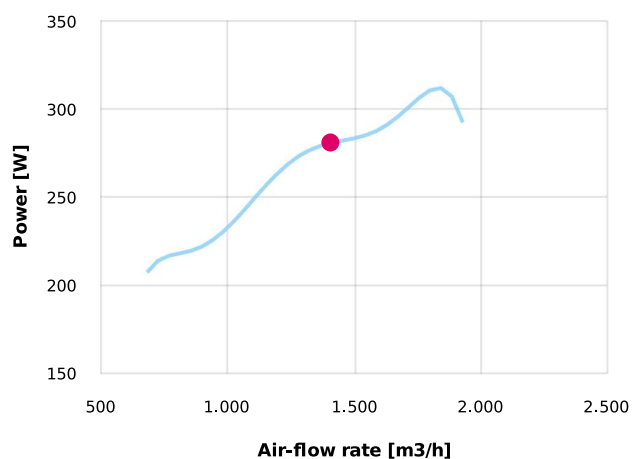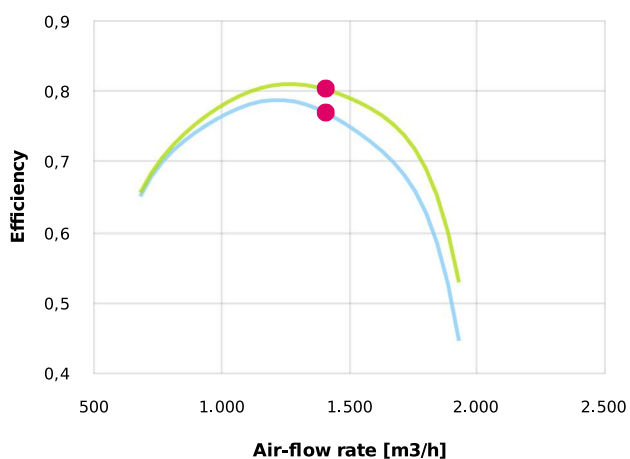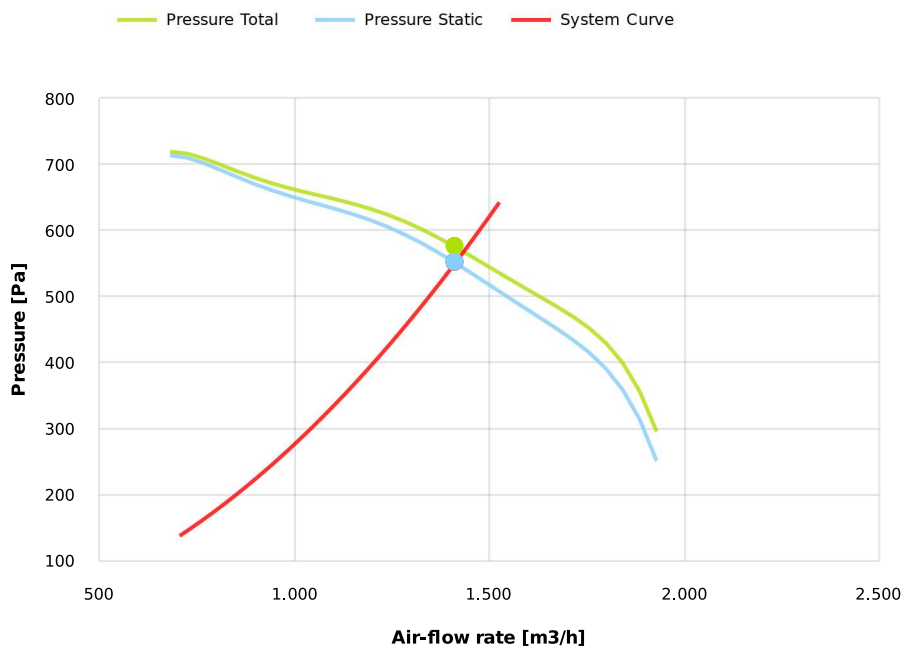

Dimensions

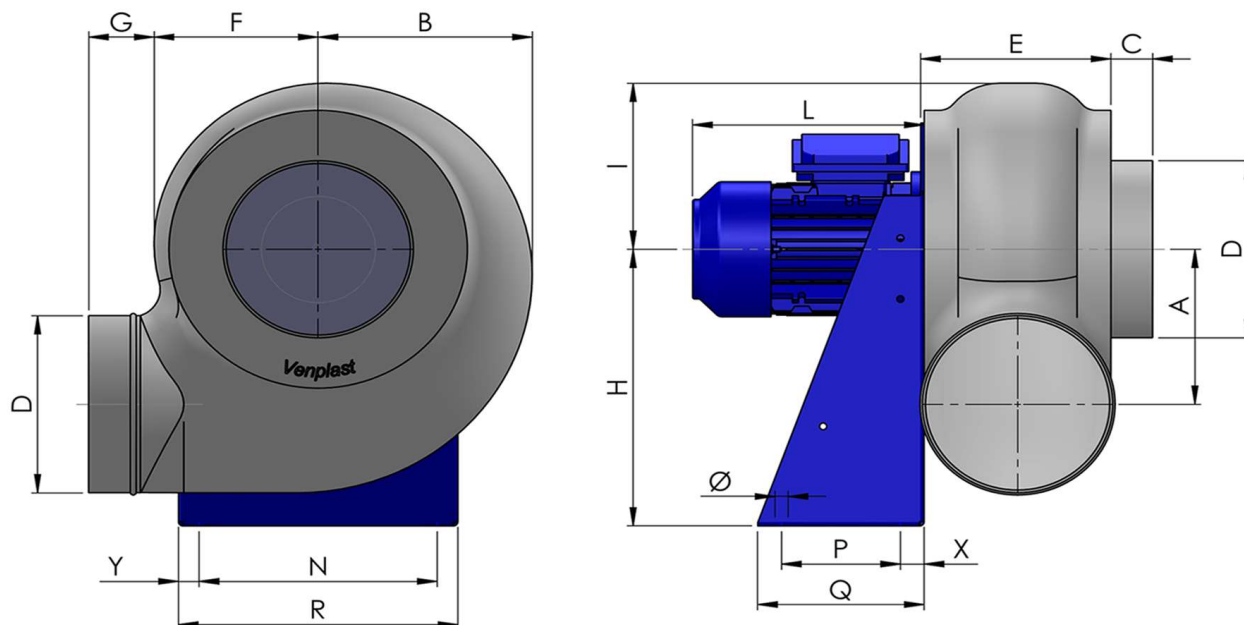

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
173	228	35	200	185	170	55	310	190	220	255	11	100	140
R							X				Y		
290							20				17.5		

Configurations & cad

