

Research Data


Air-flow rate[m ³ /h]	754.6
Pressure[Pa]	119.4
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P254
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	10
Frequency[Hz]	50
Speed[rpm]	1370
Power[kW]	0.12
IP	55
INS	

Table engines

Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.47
Voltage[V]	400
Cos φ	0.64
n	0.57



PRU254






Pe moulded housing - PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni




Working point

Q [m³/h]	754.6
P_{sta} [Pa]	119.4
P_{tot} [Pa]	126.3
P_{in} [kW] [W]	33.35
n_{sta}	0.738
n_{tot}	0.783
Rpm	1370

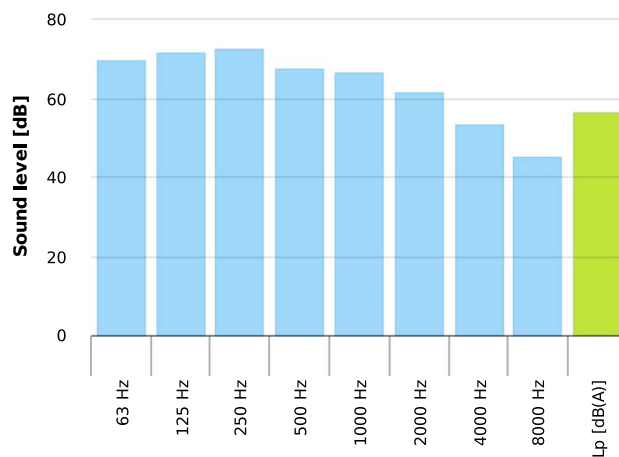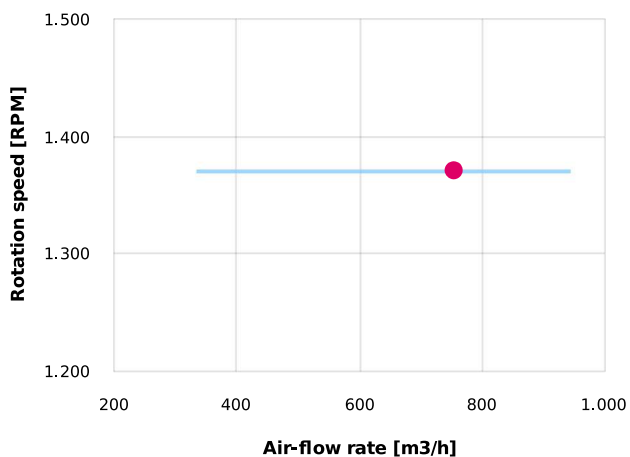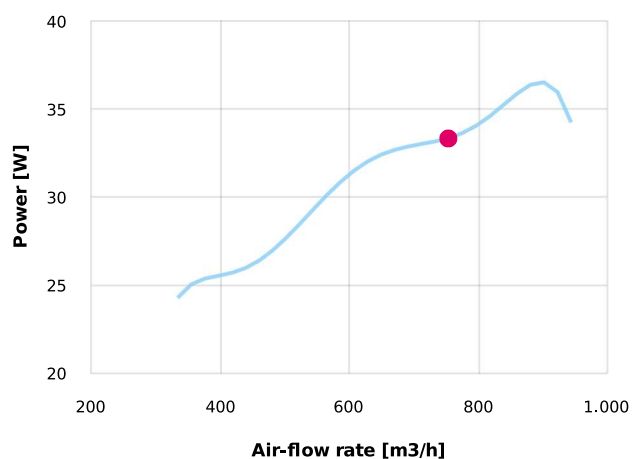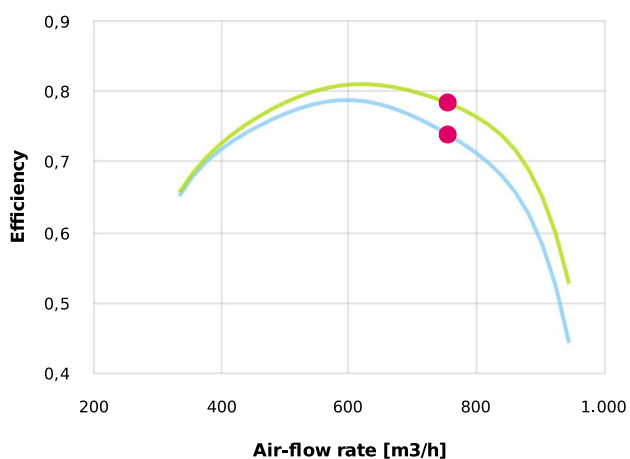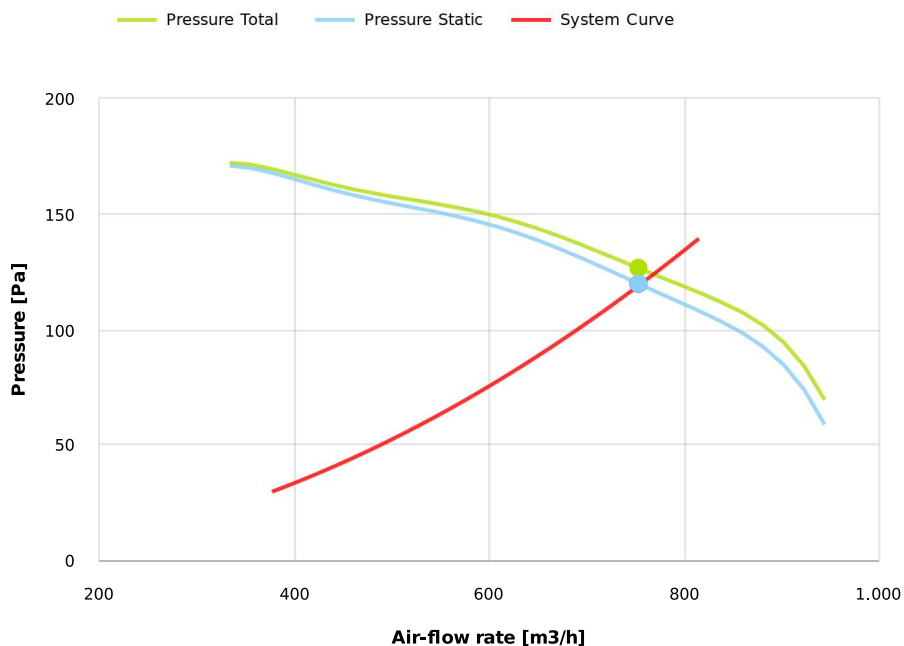

Dimensions

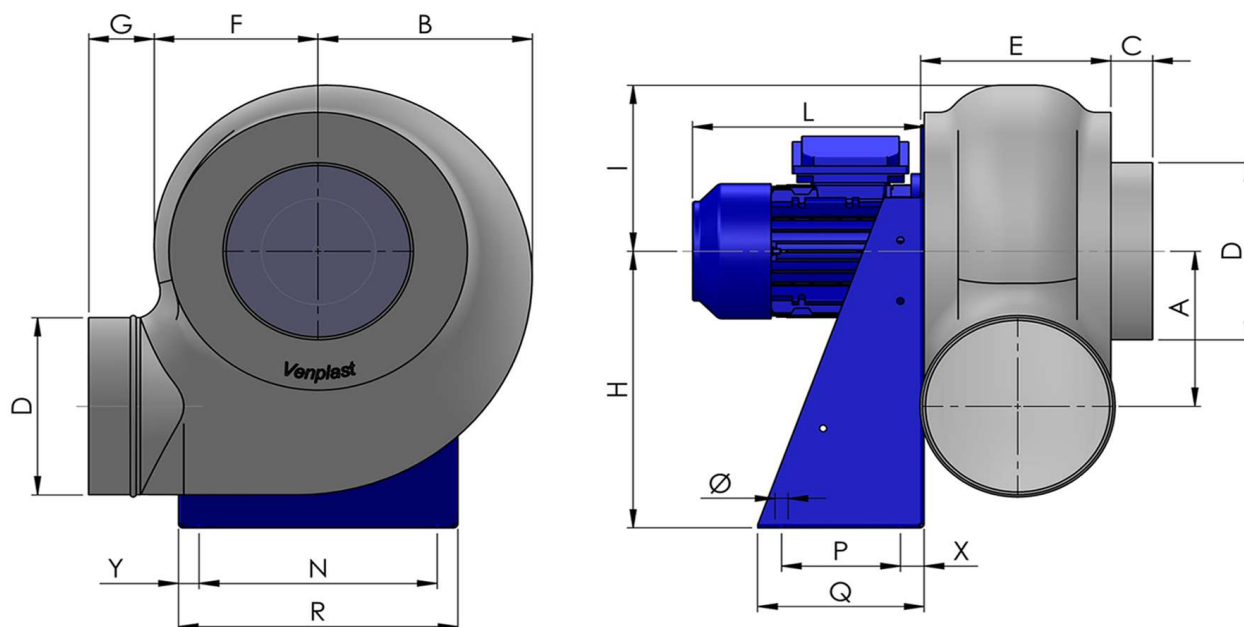

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
173	228	35	200	185	170	55	310	190	190	225	11	100	140
R							X				Y		
290							20				17.5		

Configurations & cad

