


Research Data

Air-flow rate[m ³ /h]	1122
Pressure[Pa]	150.1
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P284
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	14
Frequency[Hz]	50
Speed[rpm]	1370
Power[kW]	0.18
IP	55
INS	



PRU284

Pe moulded housing - PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





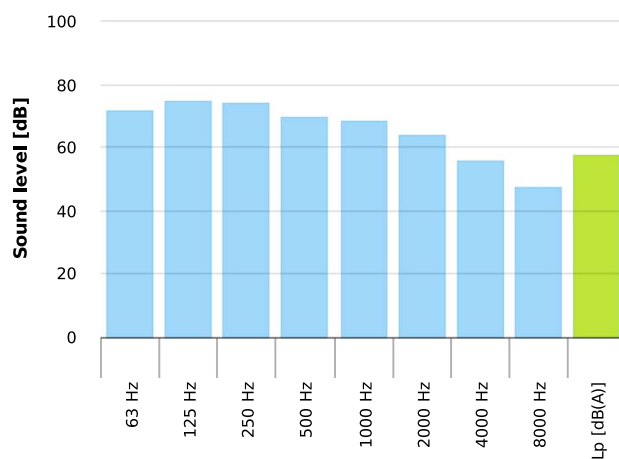


Table engines


Class IE	IE1
Size	63
Power[kW]	0.18
Current[A]	0.68
Voltage[V]	400
Cos φ	0.65
n	0.59

Working point

Q [m³/h]	1122
P_{sta} [Pa]	150.1
P_{tot} [Pa]	159.5
P_{in} [kW] [W]	66.96
n_{sta}	0.699
n_{tot}	0.742
Rpm	1370

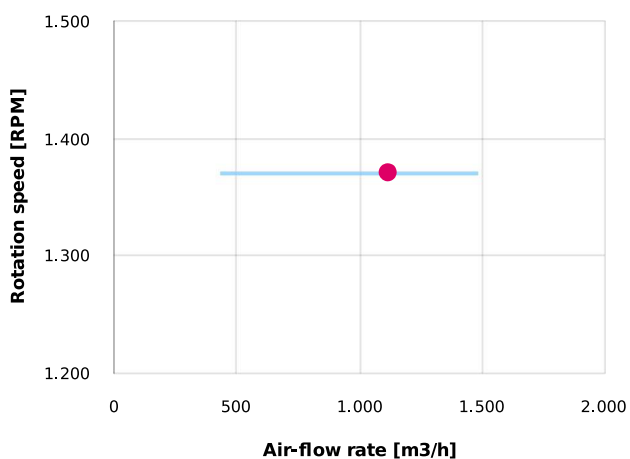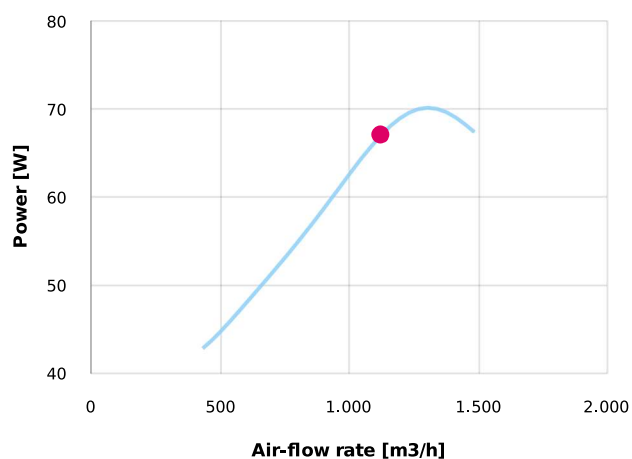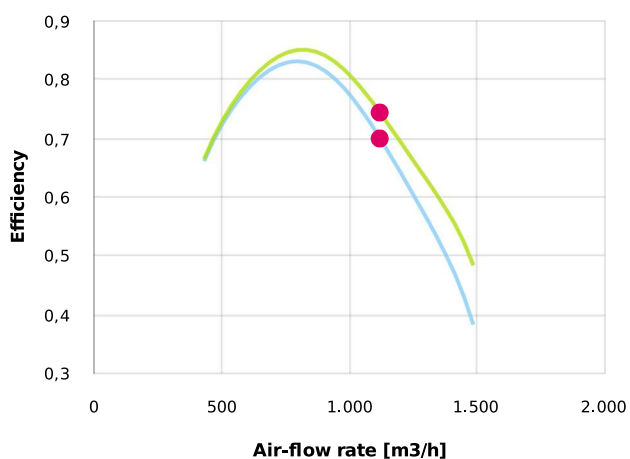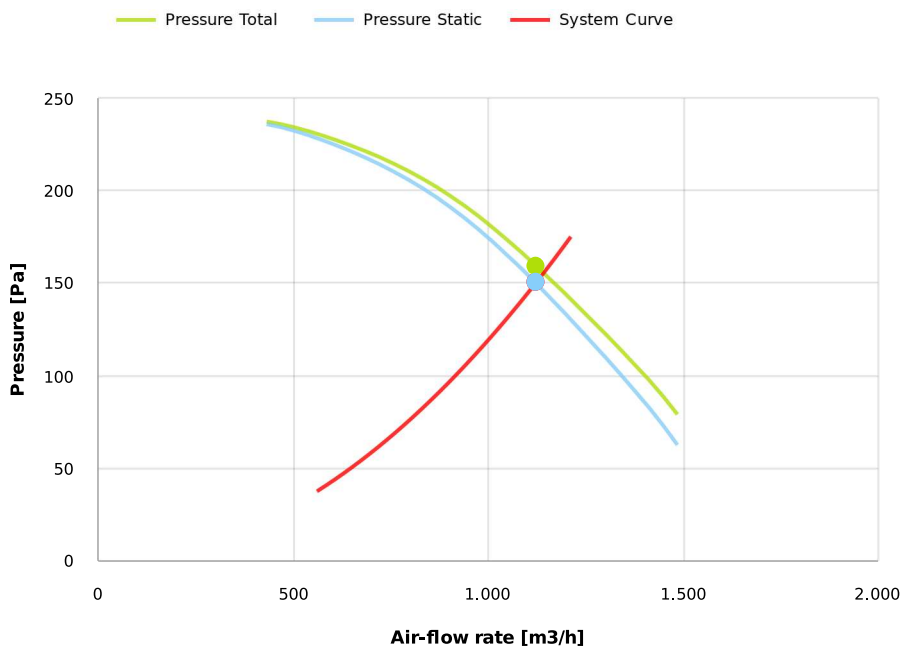

Dimensions

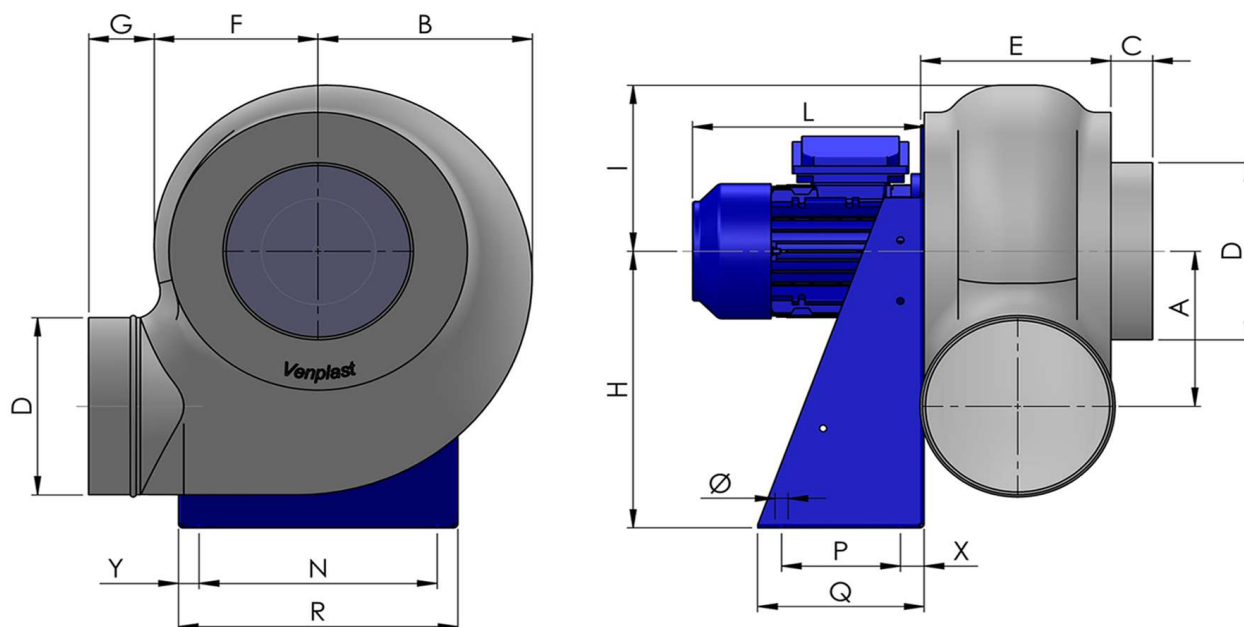

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
208	255	40	225	195	190	70	350	210	190	280	11	120	190
R				X				Y					
316				35				18					

Configurations & cad

