


Research Data

Air-flow rate[m ³ /h]	1027
Pressure[Pa]	93.89
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P316
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	19
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	0.18
IP	55
INS	



PRU316

Pe moulded housing - PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





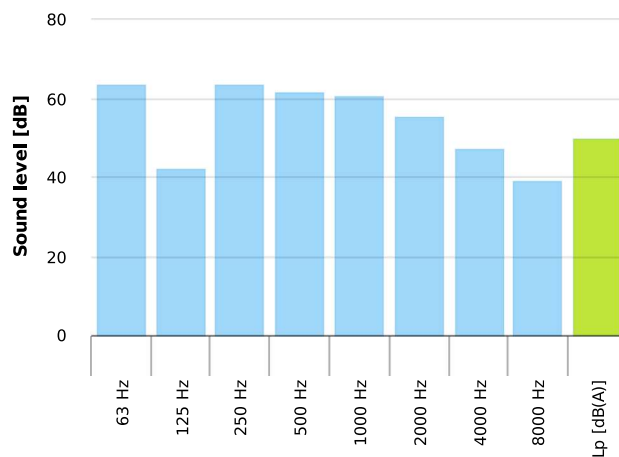


Table engines


Class IE	IE1
Size	71
Power[kW]	0.18
Current[A]	0.7
Voltage[V]	400
Cos φ	0.66
n	0.56

Working point

Q [m³/h]	1027
P_{sta} [Pa]	93.89
P_{tot} [Pa]	99.06
P_{in} [kW] [W]	35.26
n_{sta}	0.758
n_{tot}	0.8
Rpm	930

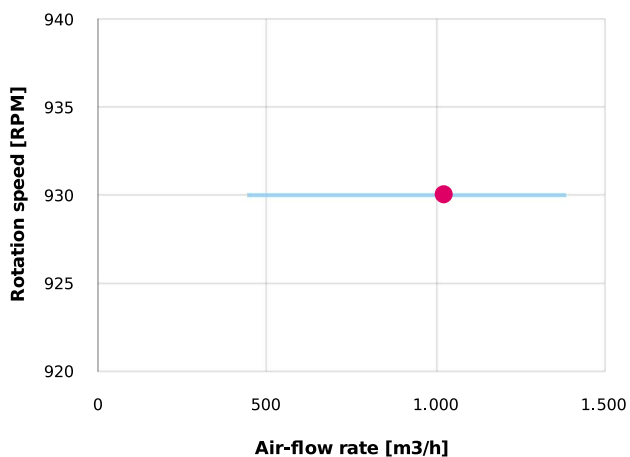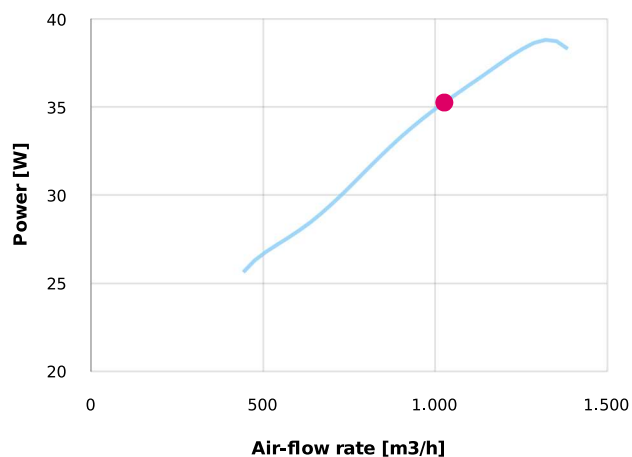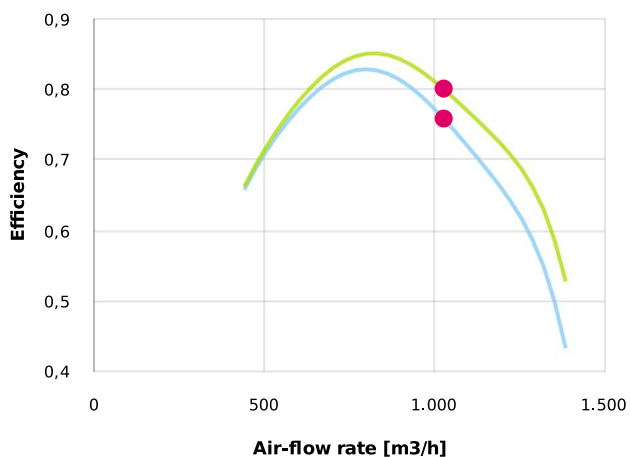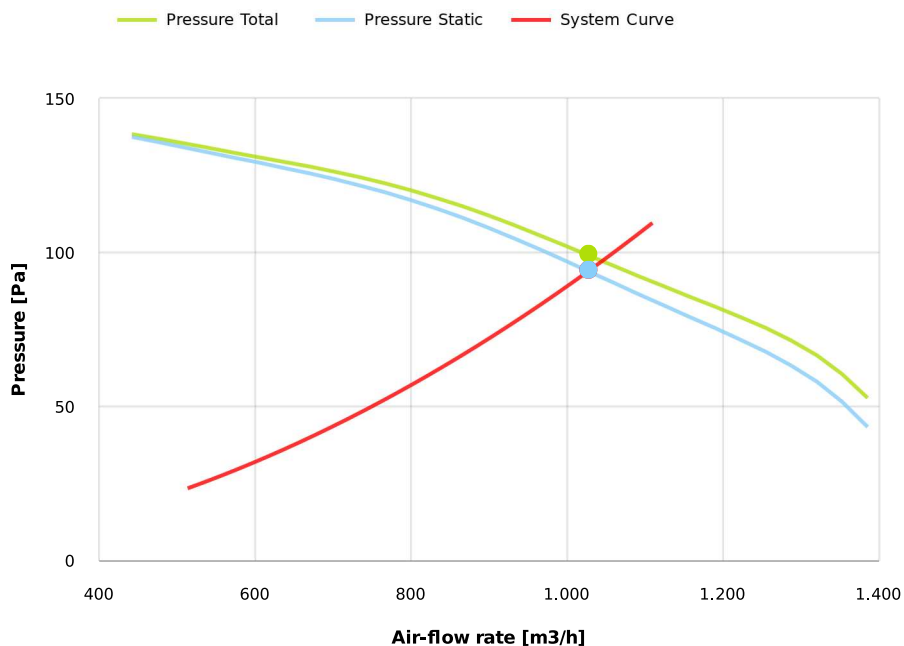

Dimensions

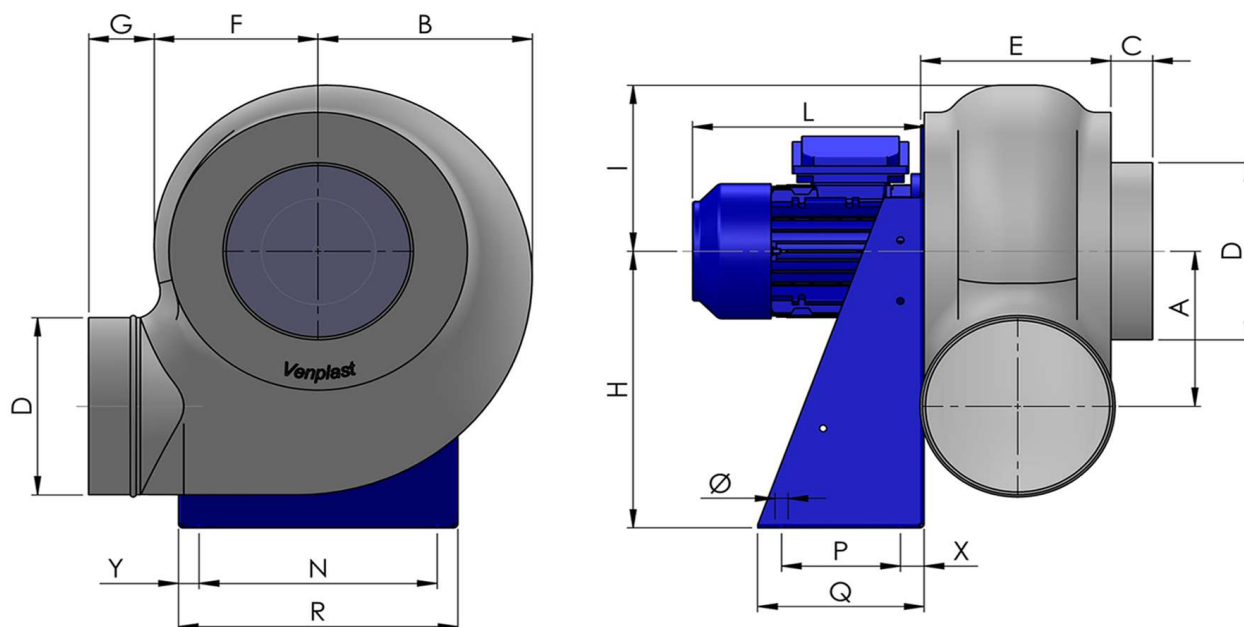

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
240	280	40	250	200	210	70	410	230	210	320	11	150	230
R				X				Y					
355				40				175					

Configurations & cad

