


Research Data

Air-flow rate[m ³ /h]	1578
Pressure[Pa]	113.7
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P356
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	23
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	0.18
IP	55
INS	



PRU356

Pe moulded housing - PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





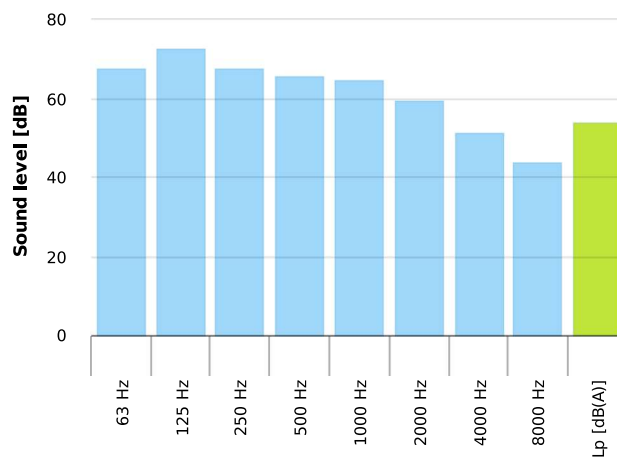


Table engines


Class IE	IE1
Size	71
Power[kW]	0.18
Current[A]	0.7
Voltage[V]	400
Cos φ	0.66
n	0.56

Working point

Q [m³/h]	1578
Psta [Pa]	113.7
Ptot [Pa]	121.4
Pin [kW] [W]	70.43
nsta	0.707
ntot	0.756
Rpm	930

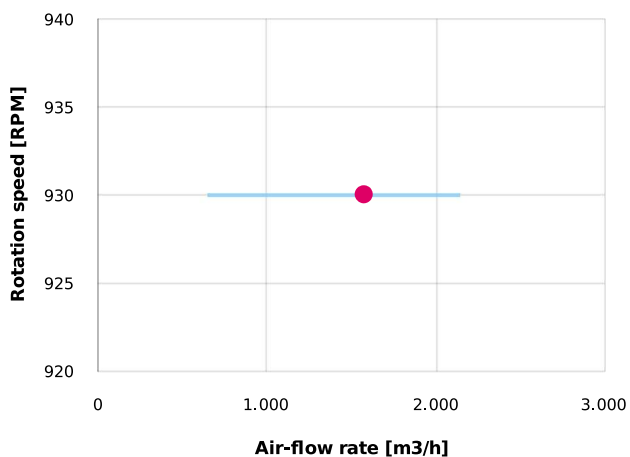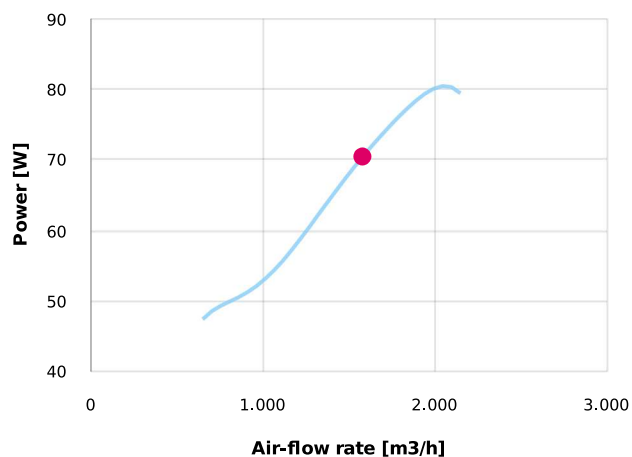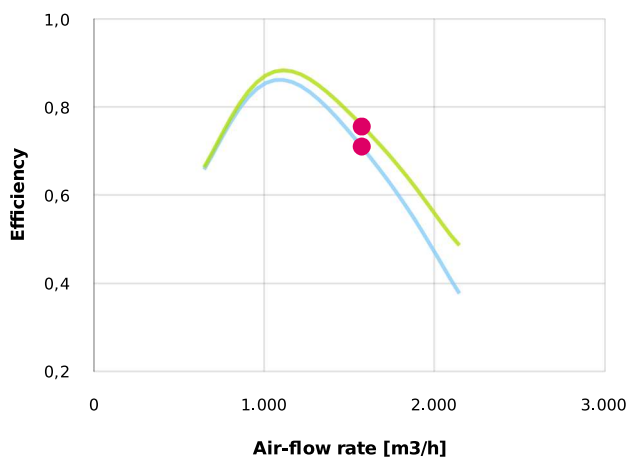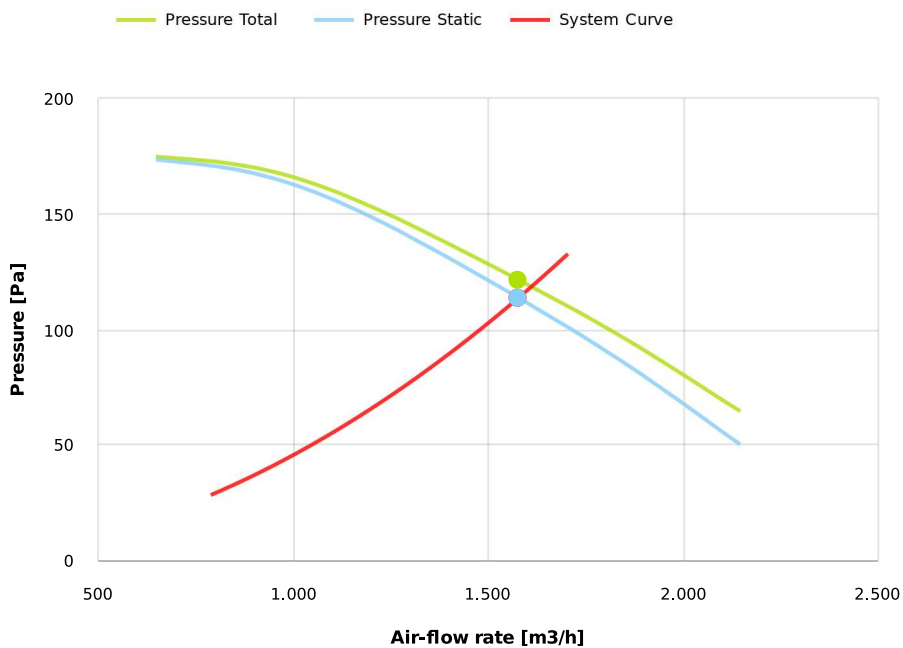

Dimensions

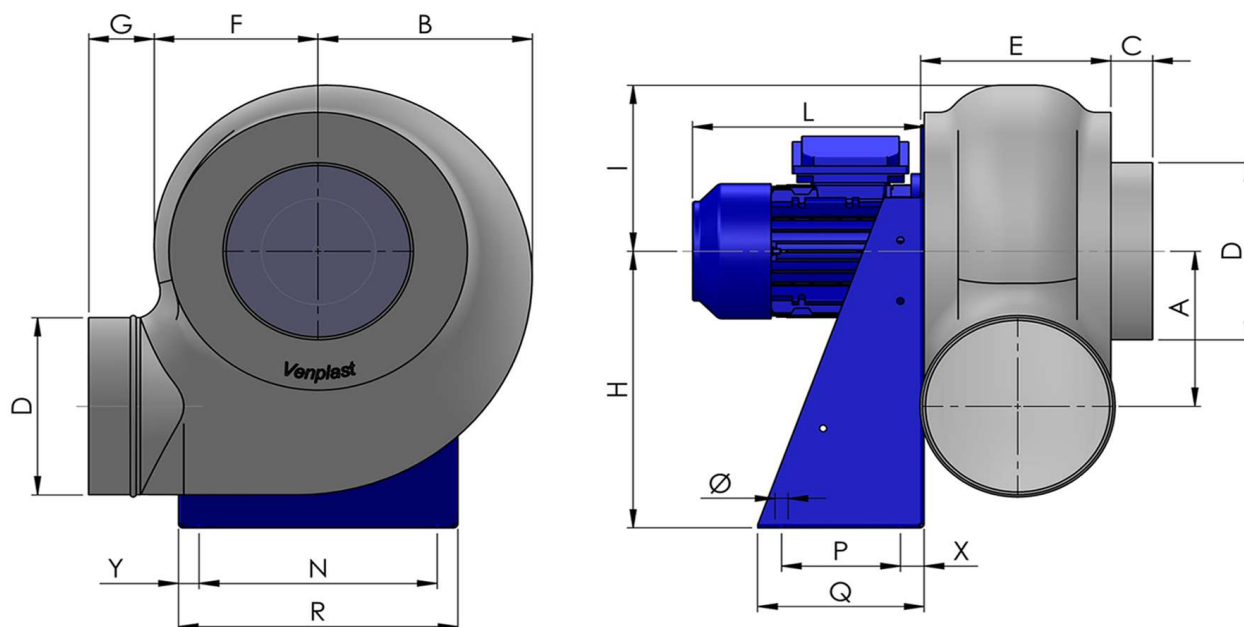

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
260	312	40	280	237	230	55	445	270	210	355	11	150	230
R				X				Y					
390				40				17.5					

Configurations & cad

