


Research Data

Air-flow rate[m ³ /h]	2980
Pressure[Pa]	365.4
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P404ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	47
Frequency[Hz]	50
Speed[rpm]	1410
Power[kW]	0.55
IP	55
INS	



PRU404ATEX

Pe-el antistatic housing -PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





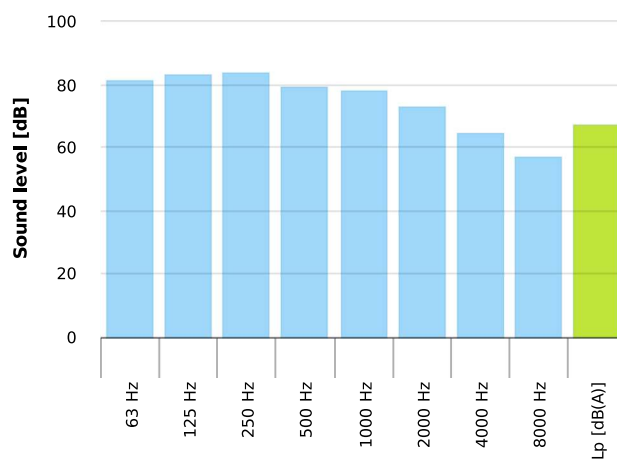


Table engines


Class IE	IE1
Size	71
Power[kW]	0.55
Current[A]	1.6
Voltage[V]	400
Cos φ	0.75
n	0.66

Working point

Q [m³/h]	2980
P_{sta} [Pa]	365.4
P_{tot} [Pa]	382.7
P_{in} [kW] [W]	383.0
n_{sta}	0.79
n_{tot}	0.827
Rpm	1410

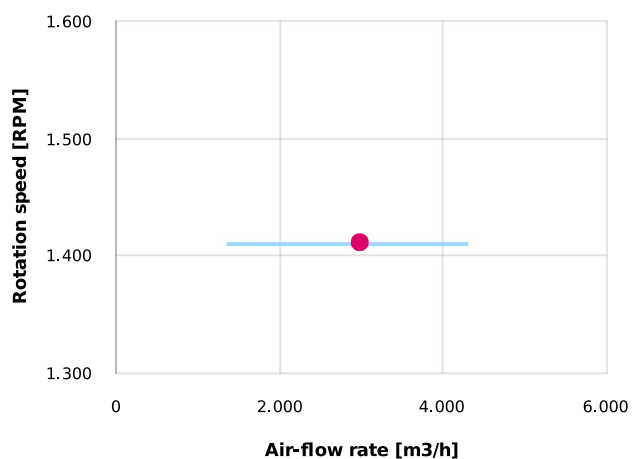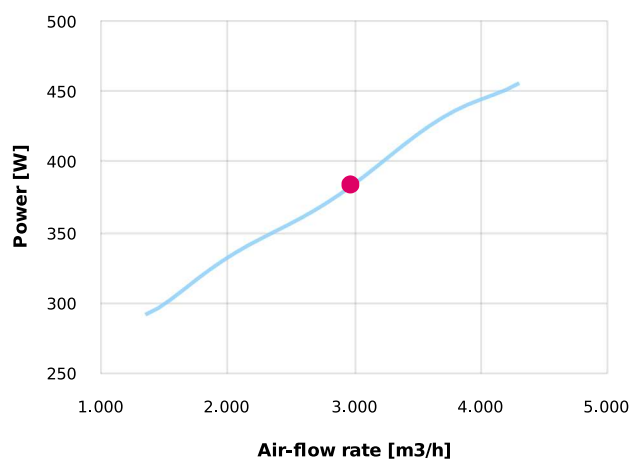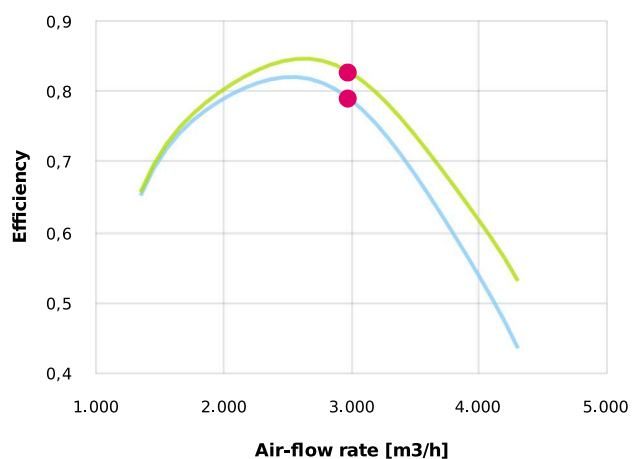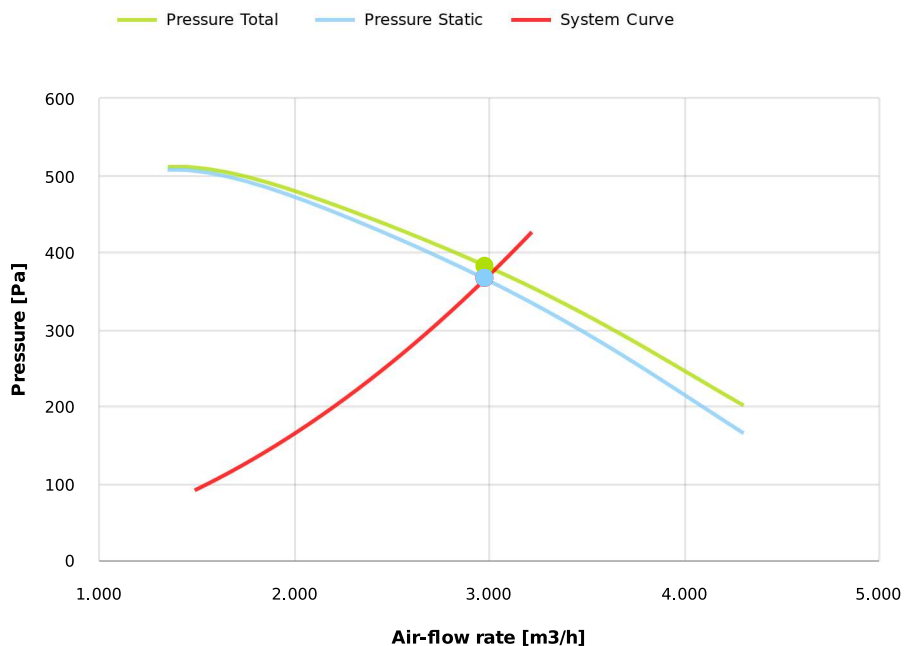

Dimensions

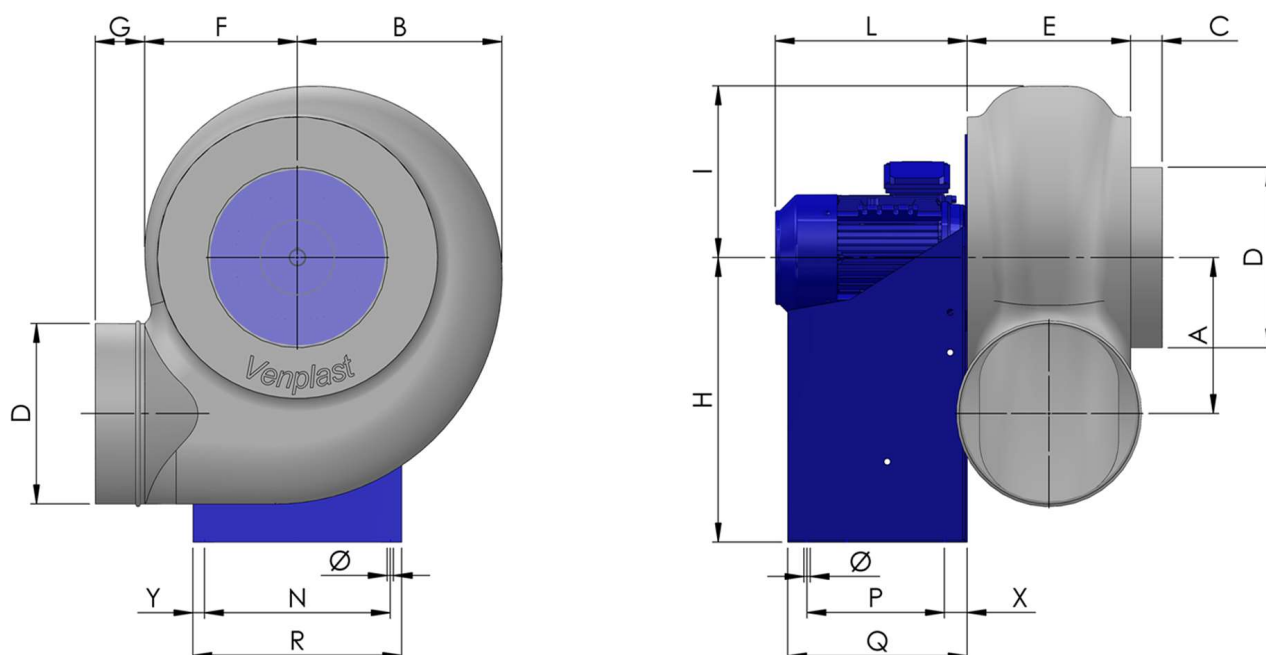

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
290	356	40	315	252	264	55	495	295	240	325	11	170	250
R				X				Y					
365				40				20					

Configurations & cad

