


Research Data

Air-flow rate[m ³ /h]	2980
Pressure[Pa]	365.4
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P404
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	33
Frequency[Hz]	50
Speed[rpm]	1410
Power[kW]	0.55
IP	55
INS	



PRU404

PE moulded housing - PP moulded impeller - epoxy painted motor support - stainless steel screws

Certificazioni

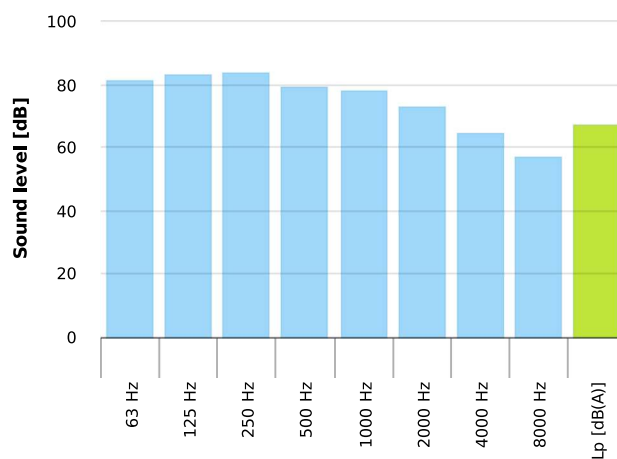
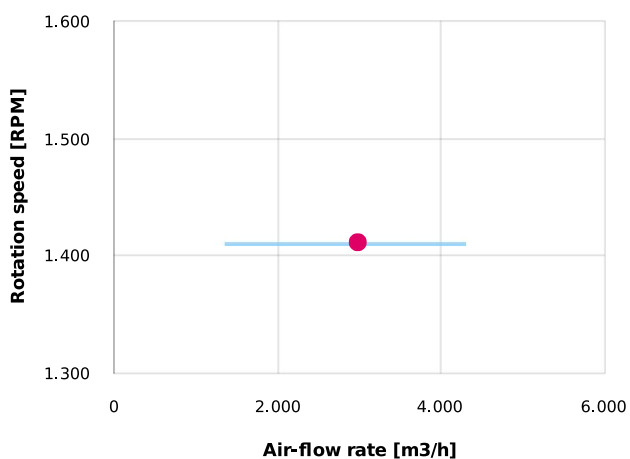
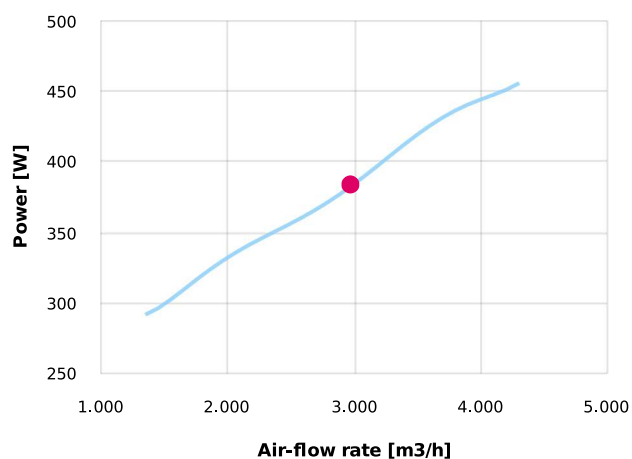
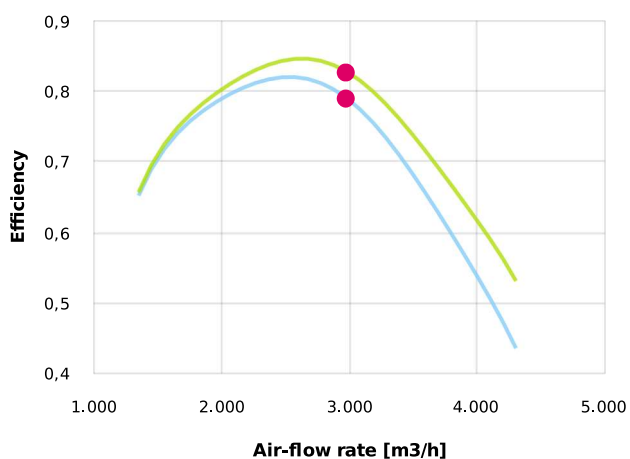
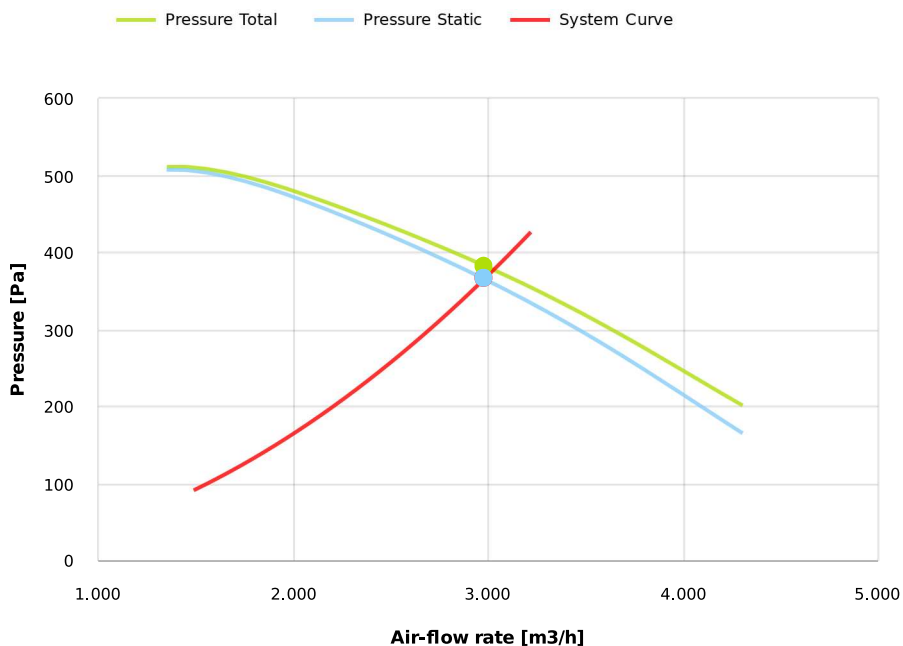


Table engines

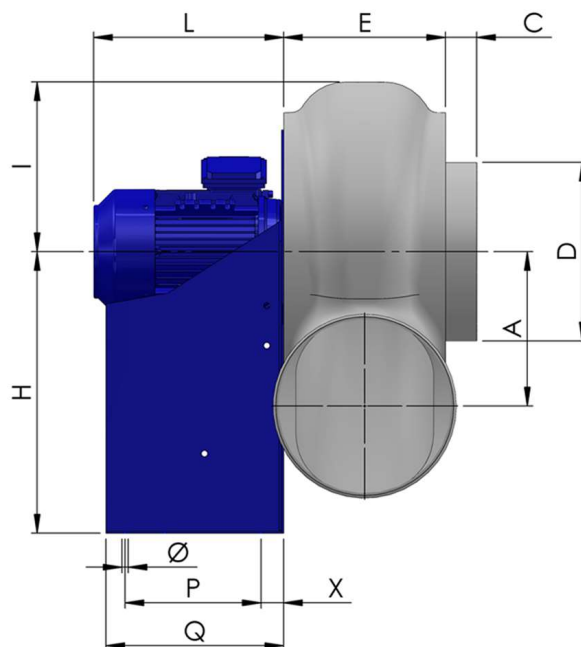
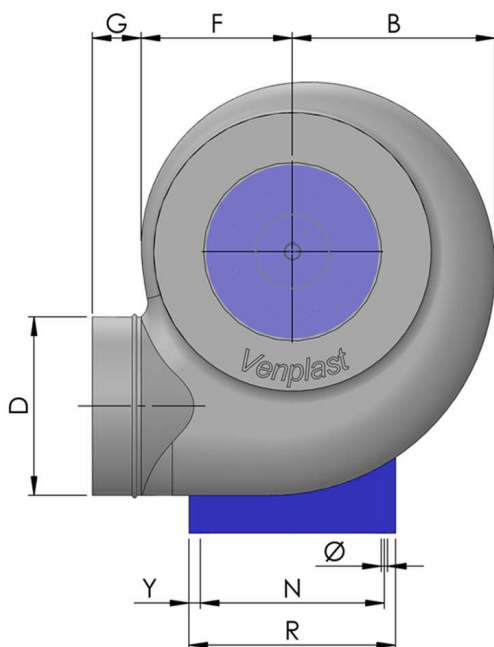
Class IE	IE1
Size	71
Power[kW]	0.55
Current[A]	1.6
Voltage[V]	400
Cos φ	0.75
n	0.66

Working point

Q [m3/h]	2980
Psta [Pa]	365.4
Ptot [Pa]	382.7
Pin [kW] [W]	383.0
nsta	0.79
ntot	0.827
Rpm	1410


















Dimensions



A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
290	356	40	315	252	264	55	495	295	240	325	11	170	250
R				X				Y					
365				40				20					

Configurations & cad

LG 0°

LG 45°

LG 90°

LG 135°

LG 180°

LG 225°

LG 270°

LG 315°

RD 0°

RD 45°

RD 90°

RD 135°

RD 180°

RD 225°

RD 270°

RD 315°
