


Research Data

Air-flow rate[m ³ /h]	2011
Pressure[Pa]	150
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P406
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	30
Frequency[Hz]	50
Speed[rpm]	920
Power[kW]	0.25
IP	55
INS	



PRU406

PE moulded housing - PP moulded impeller - epoxy painted motor support - stainless steel screws

Certificazioni

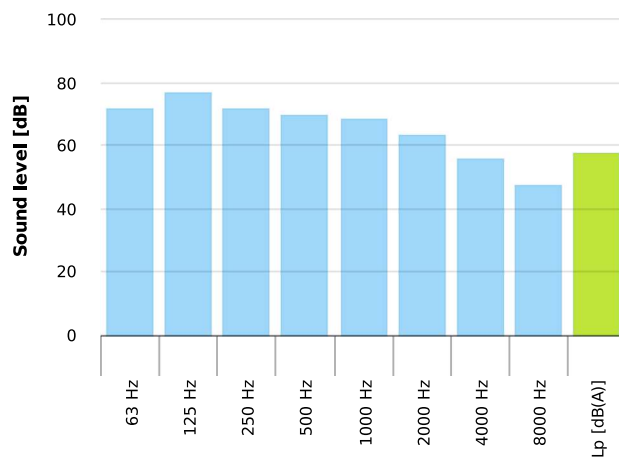
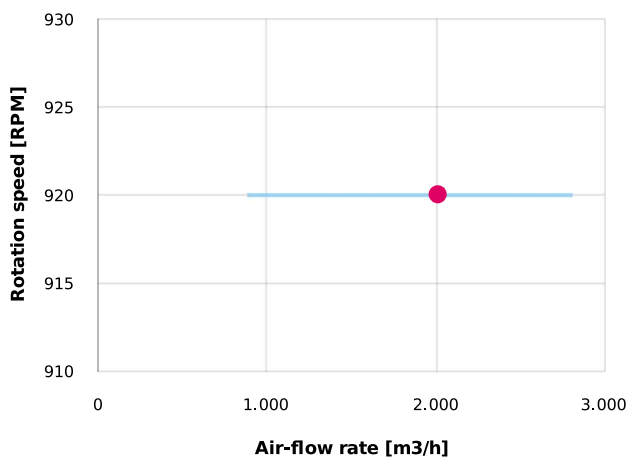
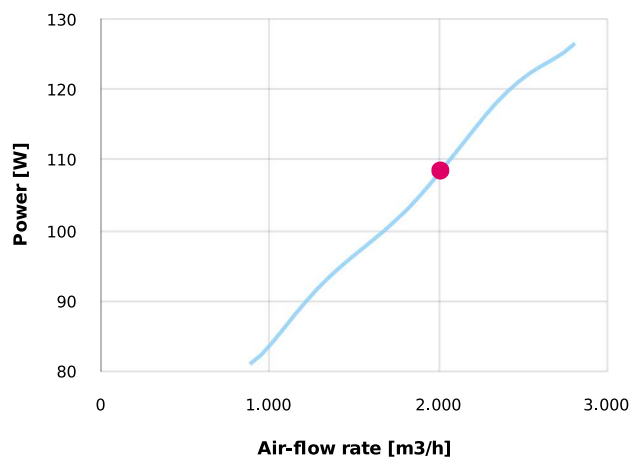
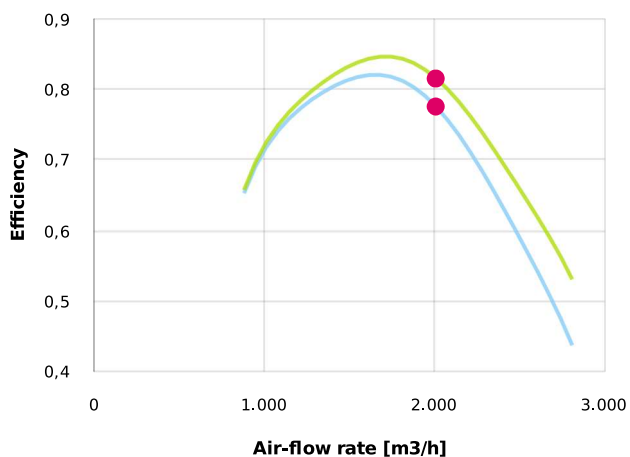
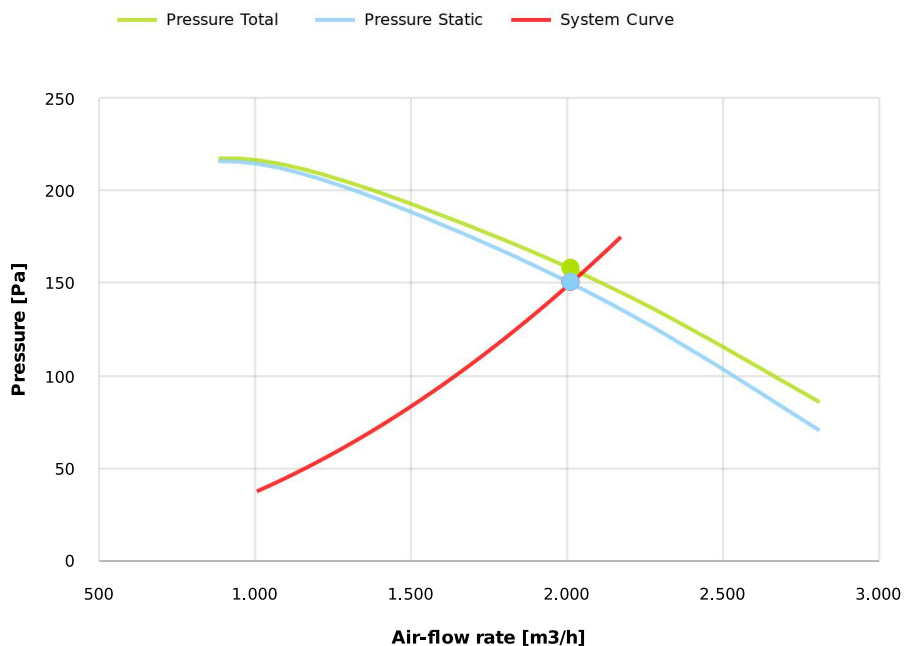


Table engines

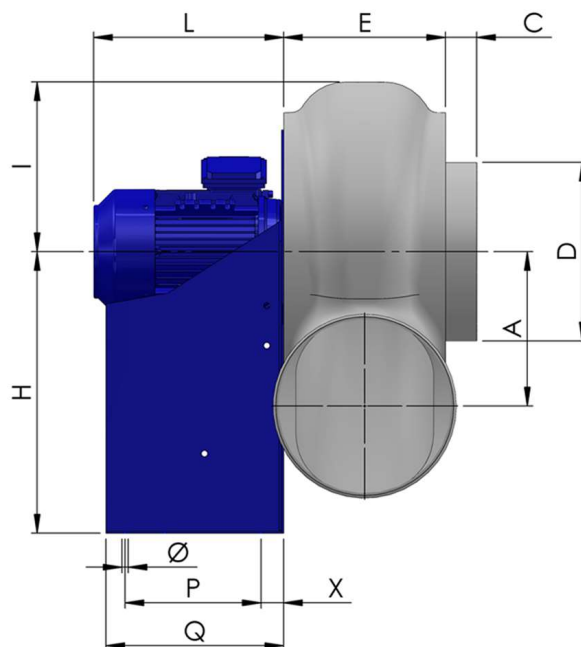
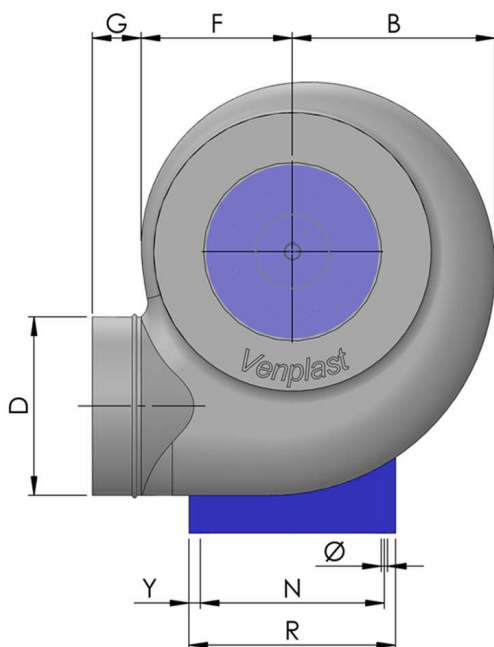
Class IE	IE1
Size	71
Power[kW]	0.25
Current[A]	0.87
Voltage[V]	400
Cos φ	0.7
n	0.59

Working point

Q [m³/h]	2011
P_{sta} [Pa]	150.0
P_{tot} [Pa]	157.9
P_{in} [kW] [W]	108.3
n_{sta}	0.775
n_{tot}	0.815
Rpm	920


















Dimensions



A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
290	356	40	315	252	264	55	495	295	220	325	11	170	250
R				X				Y					
365				40				20					

Configurations & cad

LG 0°

LG 45°

LG 90°

LG 135°

LG 180°

LG 225°

LG 270°

LG 315°

RD 0°

RD 45°

RD 90°

RD 135°

RD 180°

RD 225°

RD 270°

RD 315°
