


Research Data

Air-flow rate[m ³ /h]	2376
Pressure[Pa]	213.8
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P456ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	51
Frequency[Hz]	50
Speed[rpm]	920
Power[kW]	0.37
IP	55
INS	



PRU456ATEX

Pe-el antistatic housing -PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





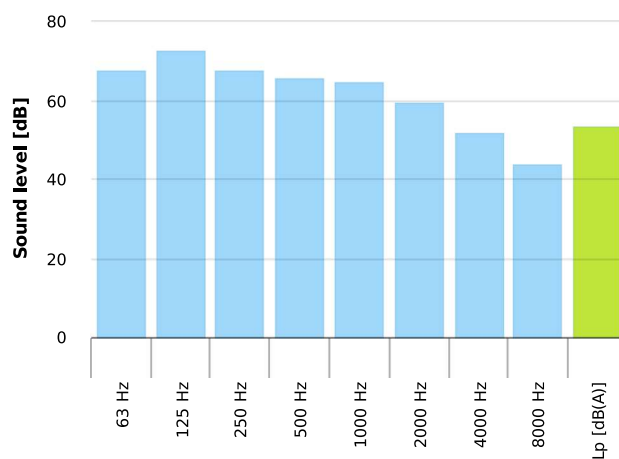


Table engines


Class IE	IE1
Size	71
Power[kW]	0.37
Current[A]	1.27
Voltage[V]	400
Cos φ	0.67
n	0.61

Working point

Q [m³/h]	2376
P_{sta} [Pa]	213.8
P_{tot} [Pa]	220.6
P_{in} [kW] [W]	170.1
n_{sta}	0.833
n_{tot}	0.859
Rpm	920

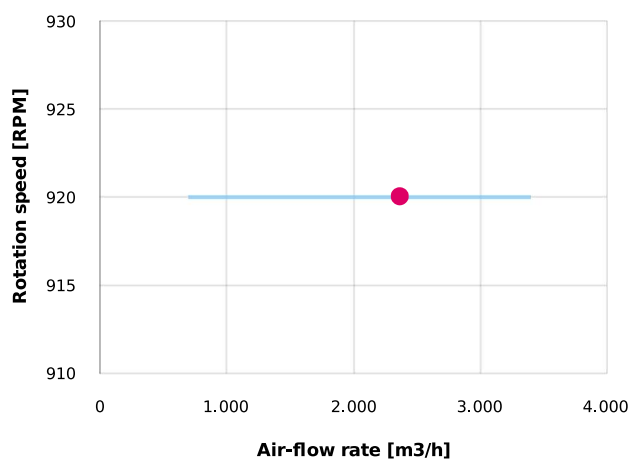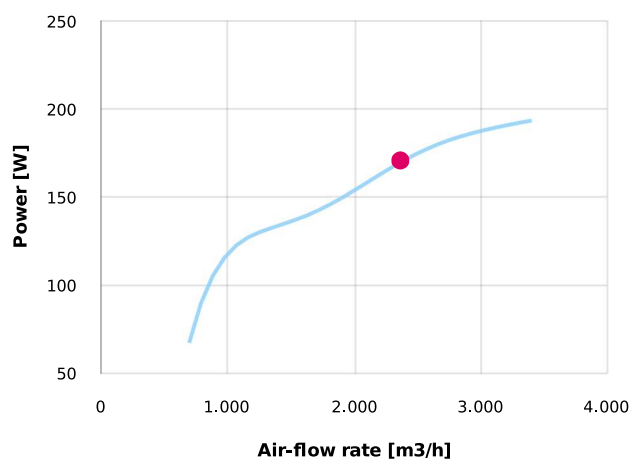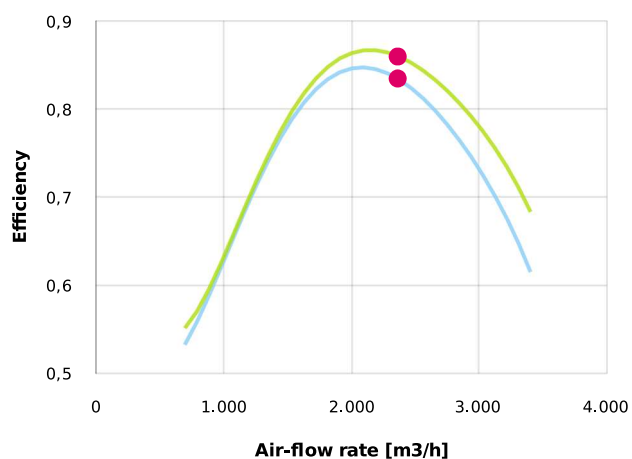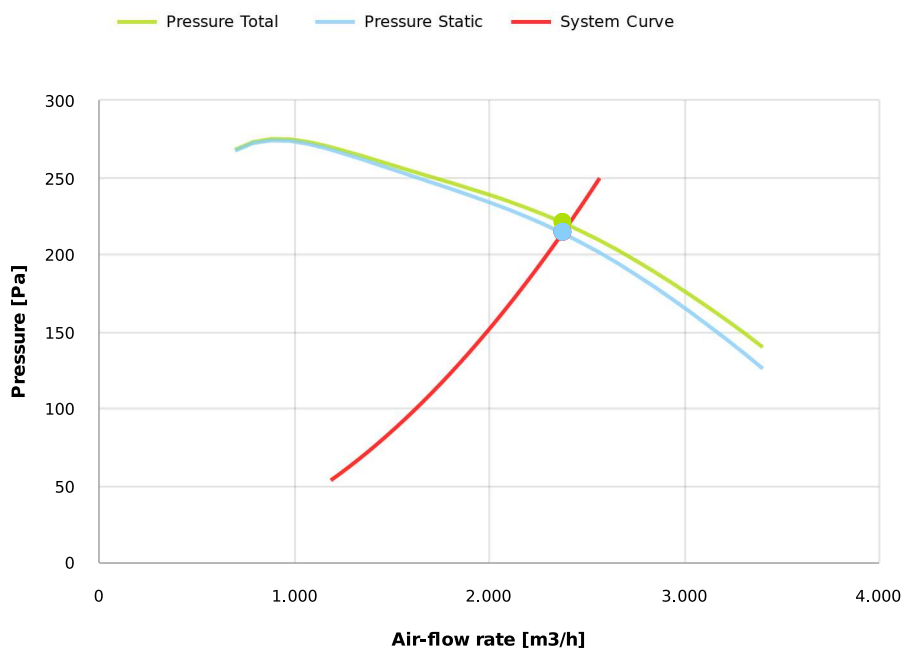

Dimensions

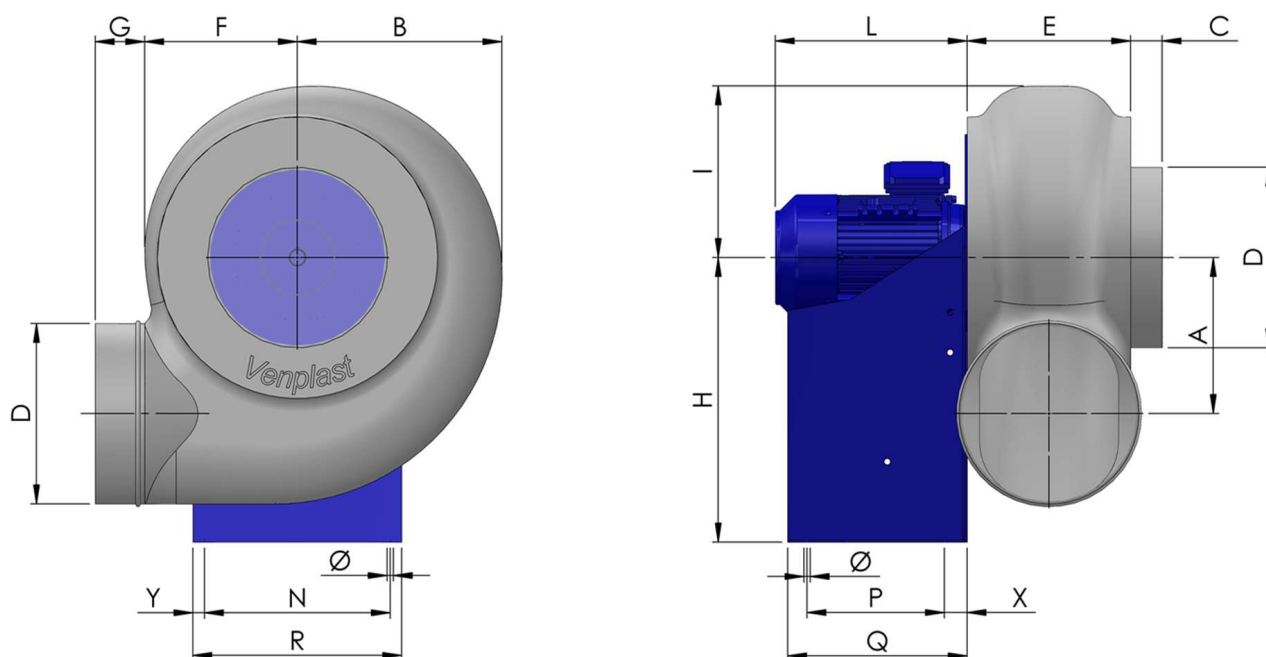

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
324	400	40	355	287	295	55	550	330	240	370	11	170	250
R				X				Y					
410				40				20					

Configurations & cad

