

KARTA KATALOGOWA

R2E120-AR38-40

Wentylator promieniowy AC, łopatki zakrzywione do przodu, jednostronnie ssący


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Średnica wirnika	120 mm
Częstotliwość	50/60 Hz	Materiał wirnika	stal ocynkowana
Prędkość obrotowa	2500 / 2600 obr/min	Stopień ochrony	IP44
Pobór mocy	83 / 110 W	Klasa izolacji	B
Pobór prądu	0,37 / 0,5 A	Zabezpieczenie silnika	termik (TOP)
Kondensator	2 µF / 450 V	Masa	1,2 kg
Maks. wydajność	255 m³/h		
Maks. ciśnienie statyczne	300 Pa		
Maks. temp. otoczenia	+50 °C (50 Hz) / +60 °C (60 Hz)		

Charakterystyka przepływowa

Charts: Air flow 50 Hz

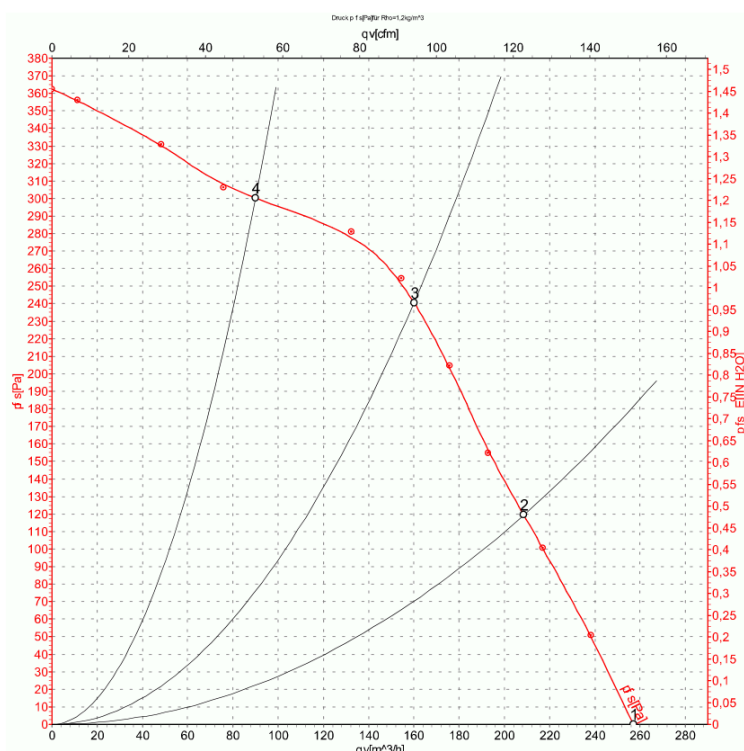

Measurement: LU-4577

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).
Wartości dla 50 Hz / 60 Hz; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R2E120-AR38-40

AC centrifugal fan

forward curved, single inlet



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

Nominal data

Type	R2E120-AR38-40		
Motor	M2E068-BF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Type of data definition		fa	fa
Valid for approval / standard		CE	CE
Speed	min ⁻¹	2500	2600
Power input	W	83	110
Current draw	A	0.37	0.5
Motor capacitor	µF	2	2
Capacitor voltage	VDB	450	450
Min. back pressure	Pa	0	0
Max. ambient temperature	°C	50	60

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



R2E120-AR38-40

AC centrifugal fan

forward curved, single inlet

Technical features


Mass	1.2 kg
Size	120 mm
Surface of rotor	Uncoated
Material of impeller	Sheet steel, hot-galvanised
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position
Insulation class	"B"
Humidity class	F0
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE

R2E120-AR38-40

AC centrifugal fan


forward curved, single inlet

Product drawing

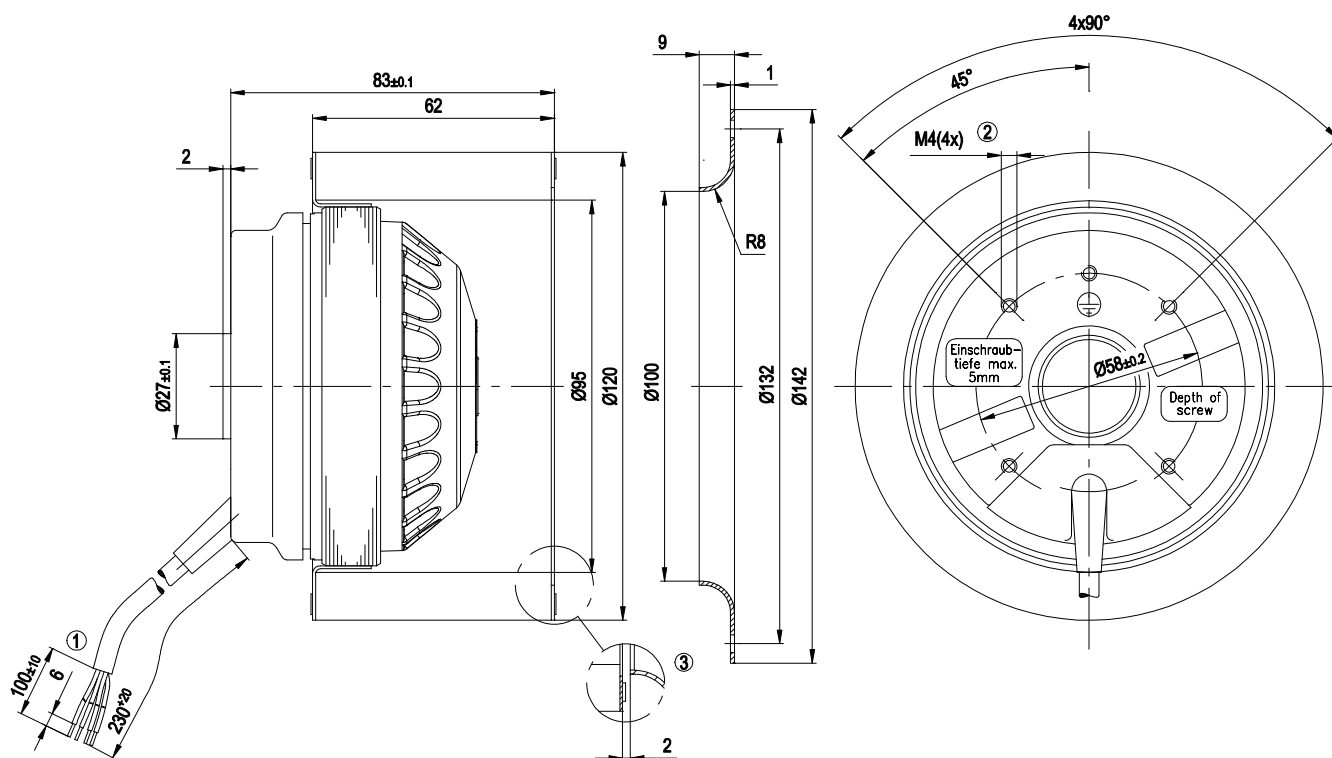

- | | |
|---|---|
| 1 | Connection line PVC 4G 0.5 mm ² , 4 x brass lead tips crimped |
| 2 | Depth of screw max. 5 mm |
| 3 | Accessory part: Inlet nozzle 09569-2-4013, not included in the standard scope of delivery |

Connection screen




U1	blue	Z	brown	U2	black
PE	green/yellow				

R2E120-AR38-40

AC centrifugal fan

forward curved, single inlet

Charts: Air flow 50 Hz

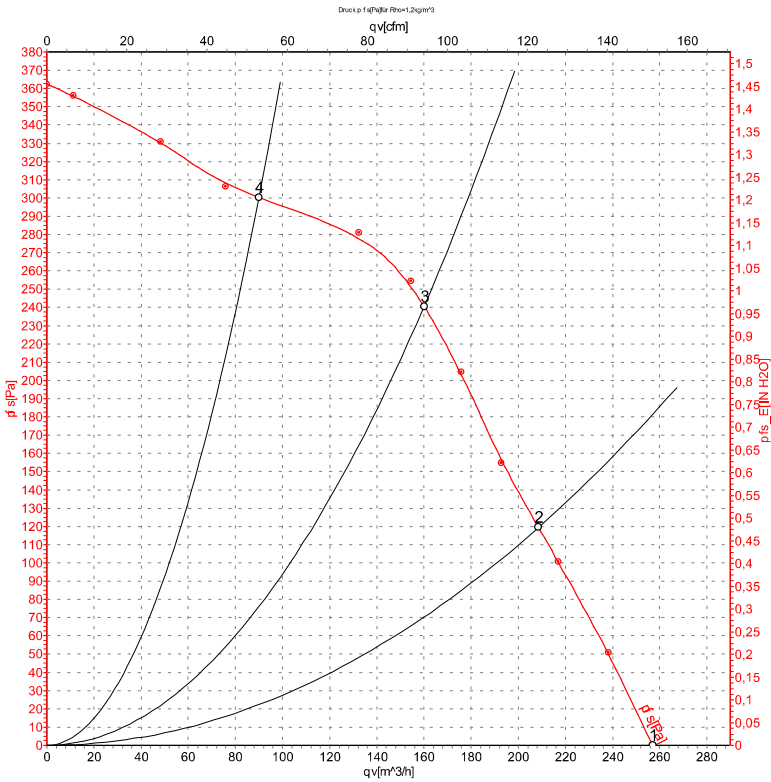

Measurement: LU-4577

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	230	50	2500	83	0.37	255	0
2	230	50	2620	78	0.35	210	120
3	230	50	2715	73	0.33	160	240
4	230	50	2805	68	0.32	90	300


U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase



R2E120-AR38-40

AC centrifugal fan
forward curved, single inlet

Charts: Air flow 60 Hz

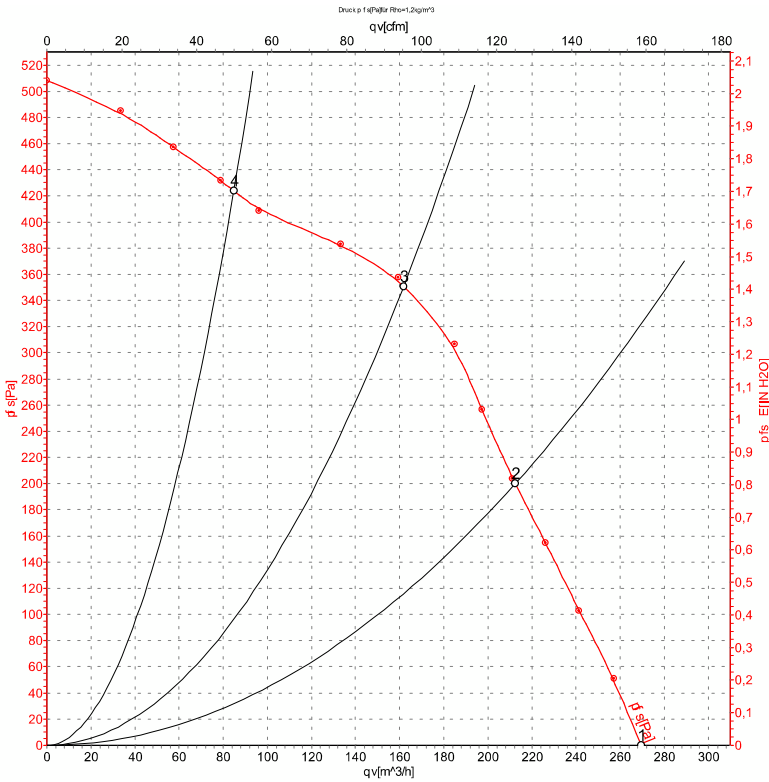

Measurement: LU-4580

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	230	60	2600	110	0.50	270	0
2	230	60	2965	97	0.42	210	200
3	230	60	3145	89	0.39	160	350
4	230	60	3325	80	0.35	85	425

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

