

KARTA KATALOGOWA

R2E133-BH66-24

Wentylator promieniowy AC, łopatki zakrzywione do tyłu


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Wielkość	133 mm
Częstotliwość	50 / 60 Hz	Silnik	M2E052-BF
Prędkość obrotowa	2700 / 3200 obr/min	Materiał wirnika	tworzywo PA6 wzmocnione włóknem szklanym
Pobór mocy	25 / 28 W	Liczba łopatek	7
Pobór prądu	0,11 / 0,13 A	Kierunek obrotów	w prawo, patrząc na wirnik
Prąd rozruchowy	0,2 / 0,21 A	Stopień ochrony	IP44
Kondensator	1 µF / 400 V	Klasa izolacji	B
Maks. wydajność	240 m³/h	Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Maks. ciśnienie statyczne	170 Pa	Łożyskowanie	kulkowe
Temperatura otoczenia	min. -25 °C; maks. 55 / 65 °C	Masa	0,7 kg

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

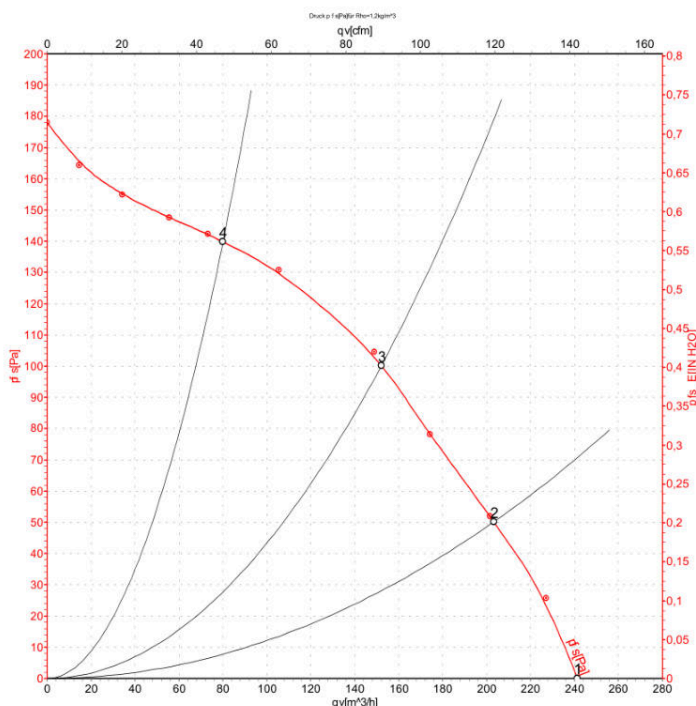

Measurement: LU-53691-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy swobodnym wydmuchu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R2E133-BH66-24

AC centrifugal fan
backward-curved



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	R2E133-BH66-24		
Motor	M2E052-BF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		fa	fa
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	2700	3200
Power consumption	W	25	28
Current draw	A	0.11	0.13
Capacitor	µF	1	1
Capacitor voltage	VDB	400	400
Capacitor standard		S0 (CE)	S0 (CE)
Min. back pressure	Pa	0	0
Min. back pressure	inH2O	0	0
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	55	65
Starting current	A	0.2	0.21

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



R2E133-BH66-24

AC centrifugal fan

backward-curved

Technical description


Weight	0.7 kg
Fan size	133 mm
Impeller material	PA6 plastic, glass-fiber reinforced
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F0
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Motor capacitor according to EN 60252-1 in safety protection class	S0
Conformity with standards	EN 60335-1; CE
Approval	CCC; CSA C22.2 No. 77; UL 2111; VDE

R2E133-BH66-24

AC centrifugal fan

backward-curved

Product drawing

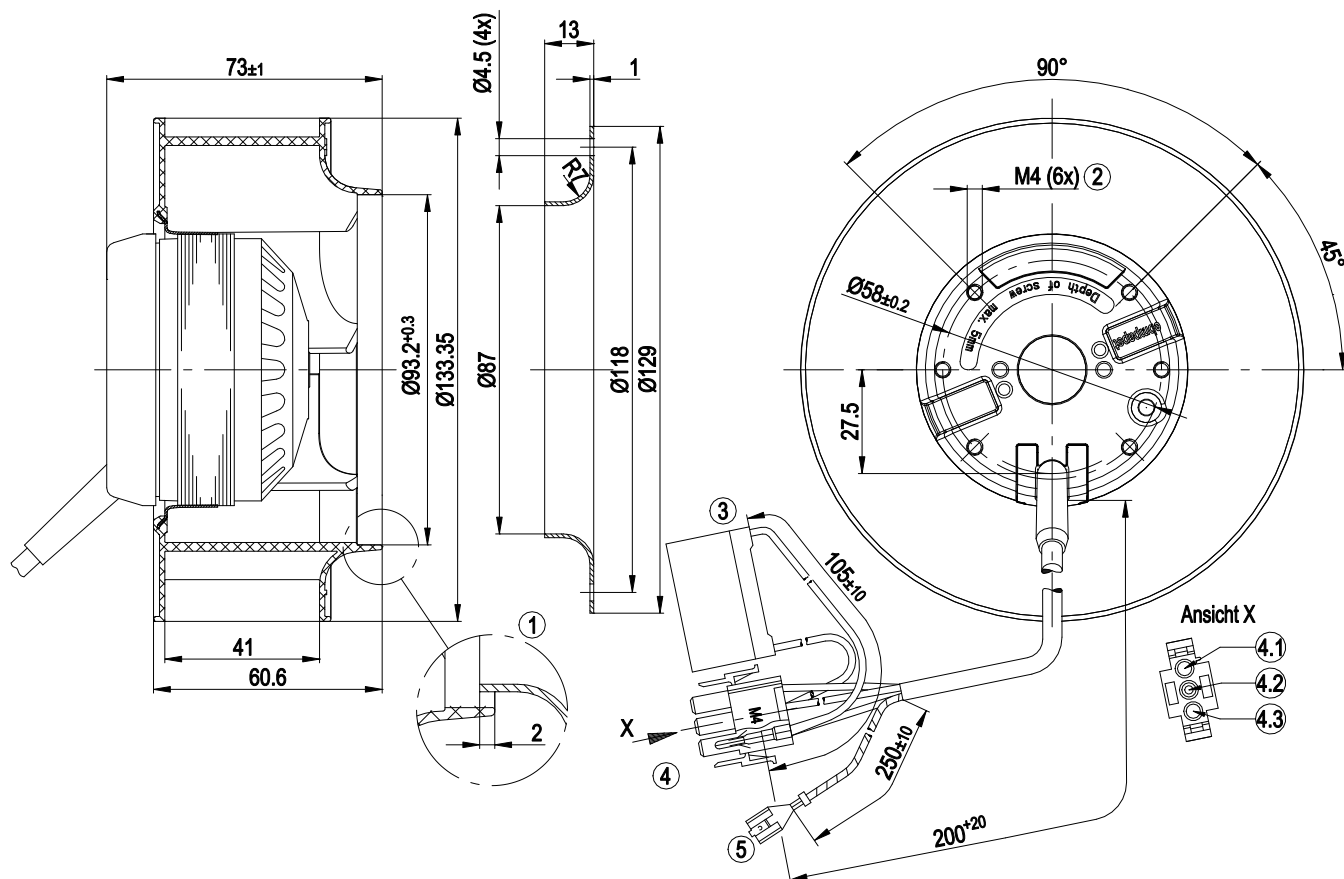


1	Accessory part: inlet ring 09566-2-4013, not included in scope of delivery
2	Max. clearance for screw 5 mm
3	Capacitor with adhesive foil
4	Connector housing AMP 350766-4 with 2x plug pin AMP 350538-1 and 1x plug pin AMP 926885-1
4.1	blue
4.2	brown (+ capacitor)
4.3	black (+ capacitor)
5	PE = flat push-on receptacle AMP 160389-3

R2E133-BH66-24

AC centrifugal fan
backward-curved

Connection diagram

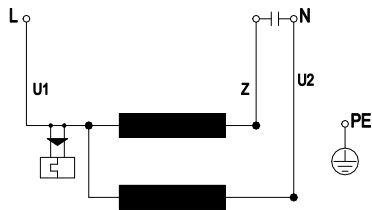


U1	blue	Z	brown	U2	black
PE	green/yellow				



R2E133-BH66-24

AC centrifugal fan
backward-curved

Curves: Air performance 50 Hz

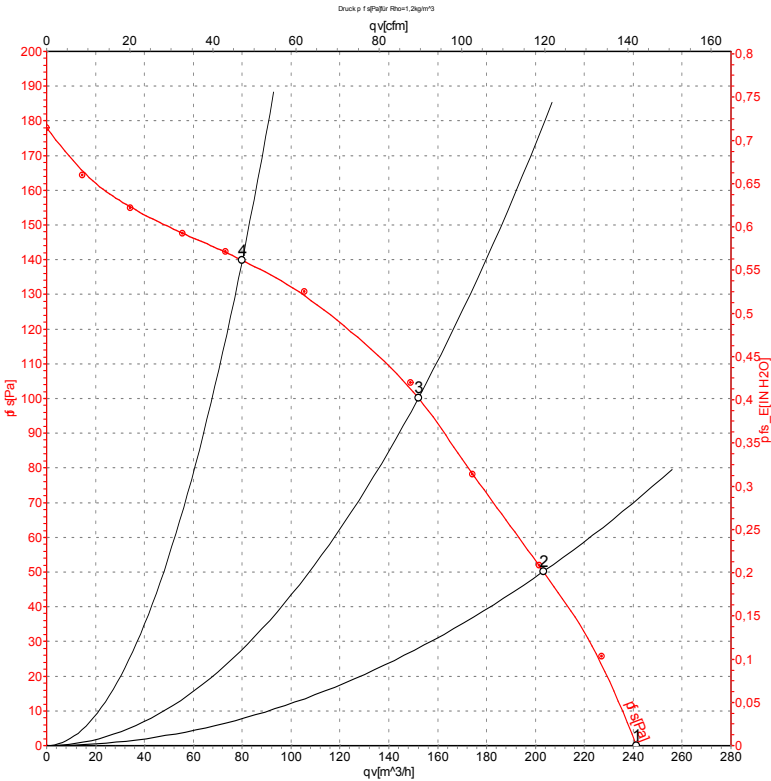

Measurement: LU-53691-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{Ts}	q _v	p _{Ts}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	230	50	2700	25	0.11	240	0	140	0.00
2	230	50	2700	25	0.11	205	50	120	0.20
3	230	50	2695	26	0.11	150	100	90	0.40
4	230	50	2730	25	0.11	80	140	45	0.56


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{Ts} = Pressure increase



R2E133-BH66-24

AC centrifugal fan
backward-curved

Curves: Air performance 60 Hz

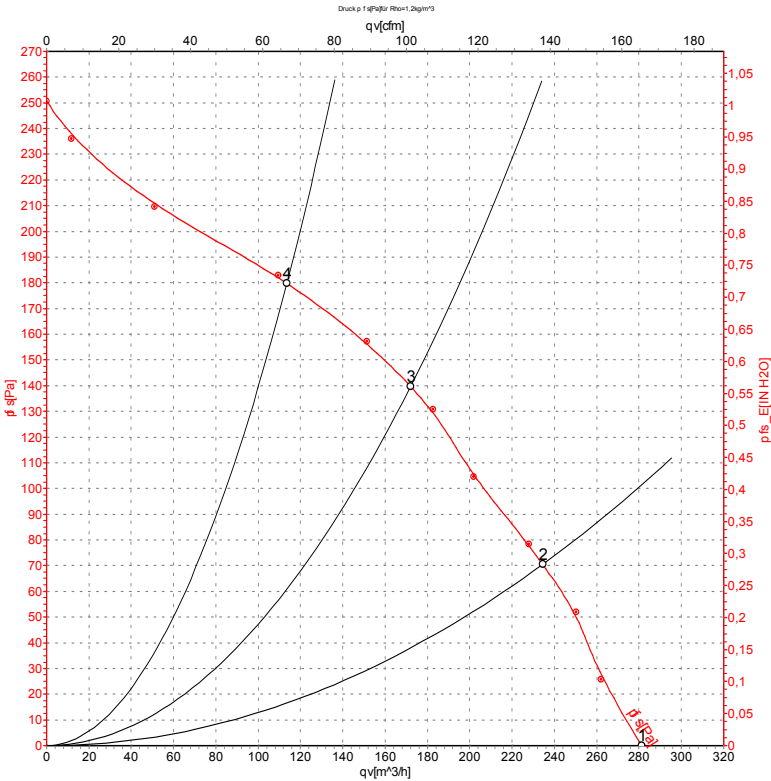

Measurement: LU-53692-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	230	60	3200	28	0.13	280	0	165	0.00
2	230	60	3130	29	0.13	235	70	140	0.28
3	230	60	3125	29	0.13	170	140	100	0.56
4	230	60	3165	29	0.13	115	180	65	0.72

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

