

KARTA KATALOGOWA

R2E140-AI51-11

Wentylator promieniowy AC, łopatki zakrzywione do przodu, jednostronnie ssący


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Wielkość	140 mm
Częstotliwość	50 Hz	Silnik	M2E068-DF
Prędkość obrotowa	2200 obr/min	Materiał wirnika	blacha stalowa ocynkowana
Pobór mocy	210 W	Kierunek obrotów	w prawo, patrząc na wirnik
Pobór prądu	0,92 A	Stopień ochrony	IP44
Kondensator	4 µF / 400 V	Klasa izolacji	B
Maks. wydajność	560 m³/h	Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Maks. ciśnienie statyczne	395 Pa	Łożyskowanie	kulkowe
Temperatura otoczenia	min. -25 °C	Masa	2,2 kg

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

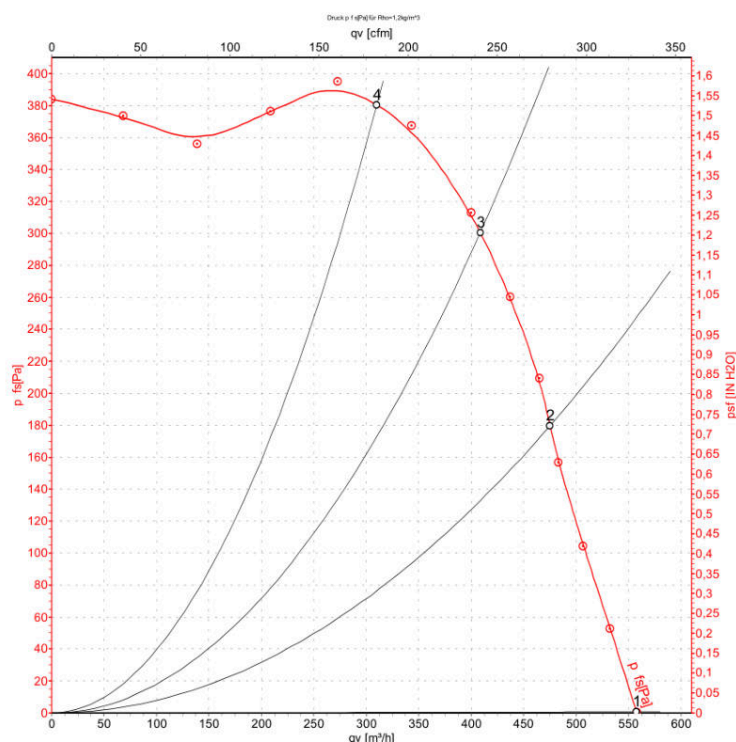

Measurement: LU-46695-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Inlet sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R2E140-AI51-11

AC centrifugal fan

forward-curved, single-intake


ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R2E140-AI51-11	
Motor	M2E068-DF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Valid for approval/standard		-
Speed (rpm)	min ⁻¹	2200
Power consumption	W	210
Current draw	A	0.92
Capacitor	µF	4
Capacitor voltage	VDB	400
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	-

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change


ebmpapst

R2E140-AI51-11

AC centrifugal fan

forward-curved, single-intake

Technical description

Weight	2.2 kg
Size	140 mm
Motor size	68
Impeller material	Sheet steel, galvanized
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F1-1; H0+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1




R2E140-AI51-11

AC centrifugal fan


forward-curved, single-intake

Product drawing

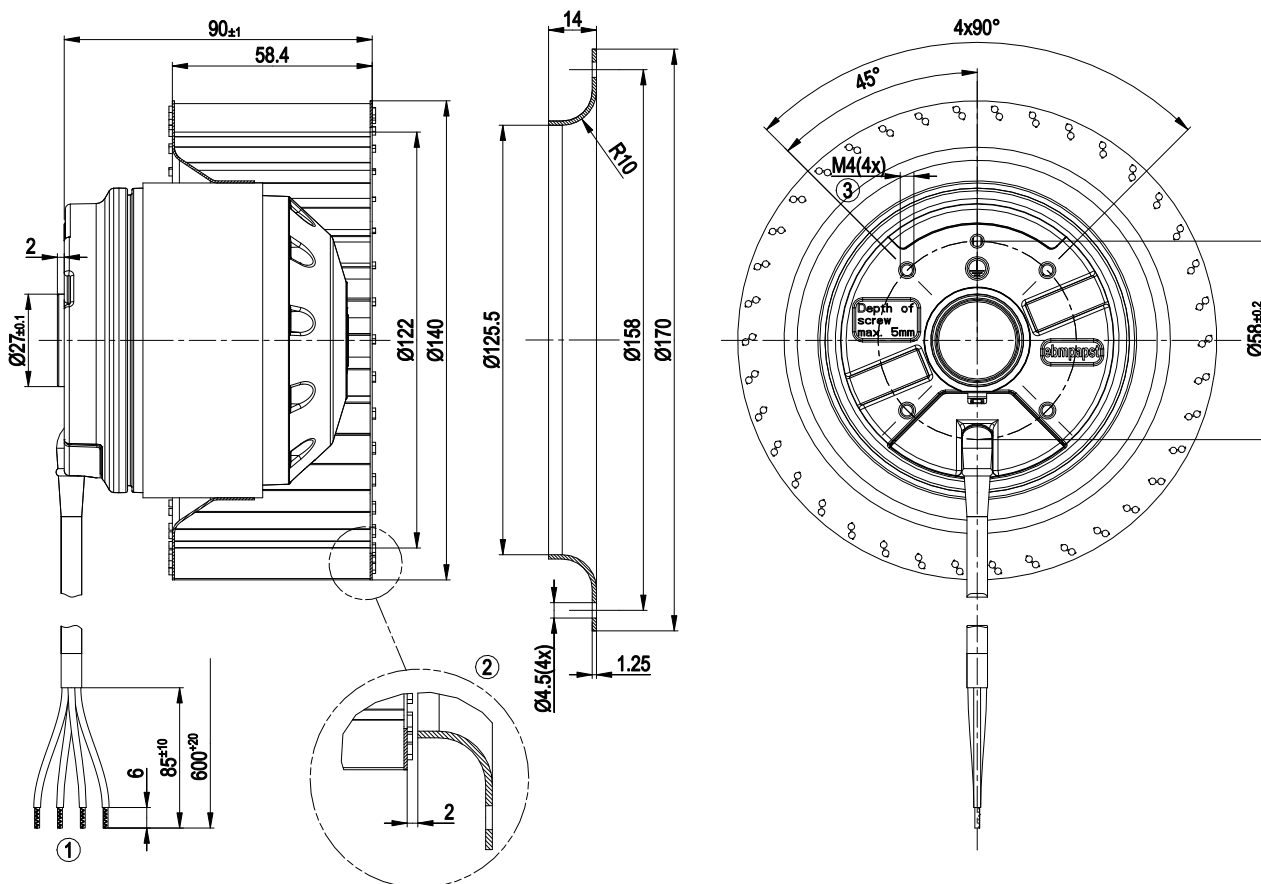

- | | |
|---|--|
| 1 | Cable PVC 4G 0.5 mm ² , 4x crimped splices |
| 2 | Accessory part: Inlet ring 09576-2-4013, not included in scope of delivery |
| 3 | Max. clearance for screw 5 mm |

Connection diagram




U1	blue	Z	brown	U2	black
PE	green/yellow				

R2E140-AI51-11

AC centrifugal fan

forward-curved, single-intake

Curves: Air performance 50 Hz

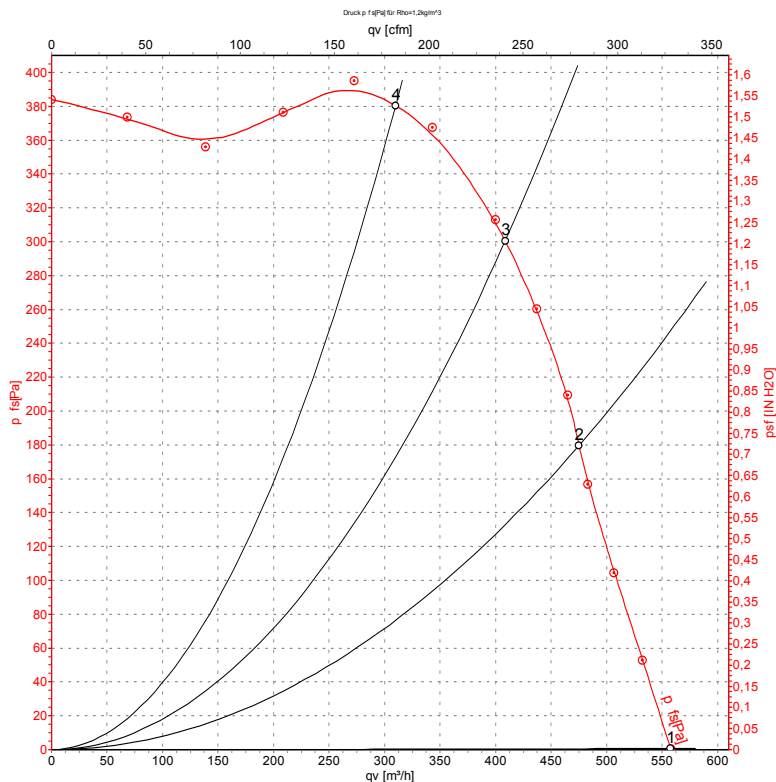

Measurement: LU-46695-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	230	50	2200	180	0.80	560	0	330	0.00
2	230	50	2355	161	0.70	475	180	280	0.72
3	230	50	2470	147	0.64	410	300	240	1.20
4	230	50	2610	130	0.56	310	380	180	1.53

U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · P_{fs} = Pressure increase



ebm-papst