

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2

D-74673 Mulfingen

Phone: +49(0)7938/81-0

Fax: +49(0)7938/81-110

info1@de.ebmpapst.comwww.ebmpapst.com**Nominal data**


Type	R2E175-AR72-05		
Motor	M2E052-CA		
Phase		1~	1~
Nominal voltage	V	230	230
Frequency	Hz	50	60
Type of data definition		rfa	rfa
Valid for approval / standard		CE	CE
Speed	min ⁻¹	2650	3100
Power input	W	50	51
Current draw	A	0.25	0.23
Motor capacitor	μF	1.5	1.5
Capacitor voltage	VDB	400	400
Capacitor standard		P0 (CE)	P0 (CE)
Min. back pressure	Pa	0	0
Max. ambient temperature	°C	-	-

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations


Technical features

Leakage current	< 0.75 mA
Size	175 mm
Operation mode	S1
Direction of rotation	Clockwise, seen on rotor
Mounting position	Any
Insulation class	"F"
Cable exit	Variable
Condensate discharge holes	None
Motor bearing	Ball bearing
Mass	0.85 kg
Material of impeller	PA plastic 6.6, fiberglass-reinforced, round sheet-metal plate coated in black
Motor protection	Thermal overload protector (TOP) wired internally
Product conforming to standard	CE
Surface of rotor	Coated in black
Number of blades	7
Type of protection	IP 20
Protection class	I
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Approval	CCC; GOST


Product drawing

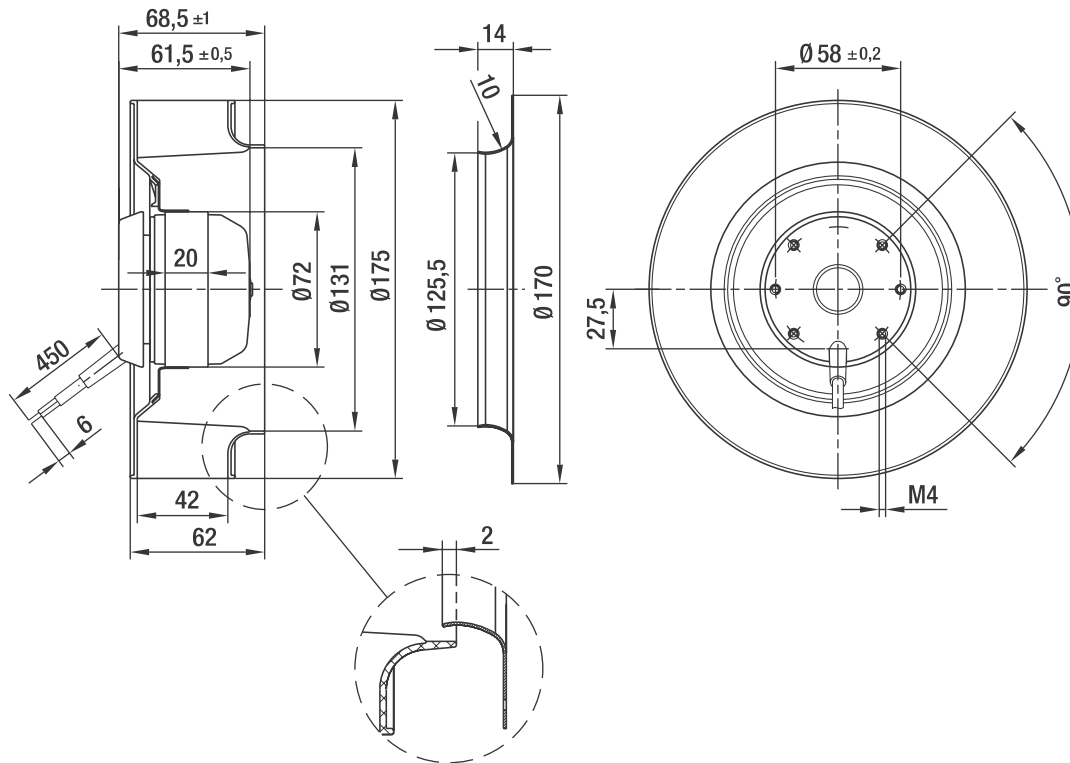

Connection screen

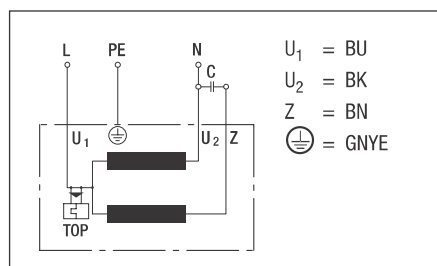

Charts: Air flow 50 Hz

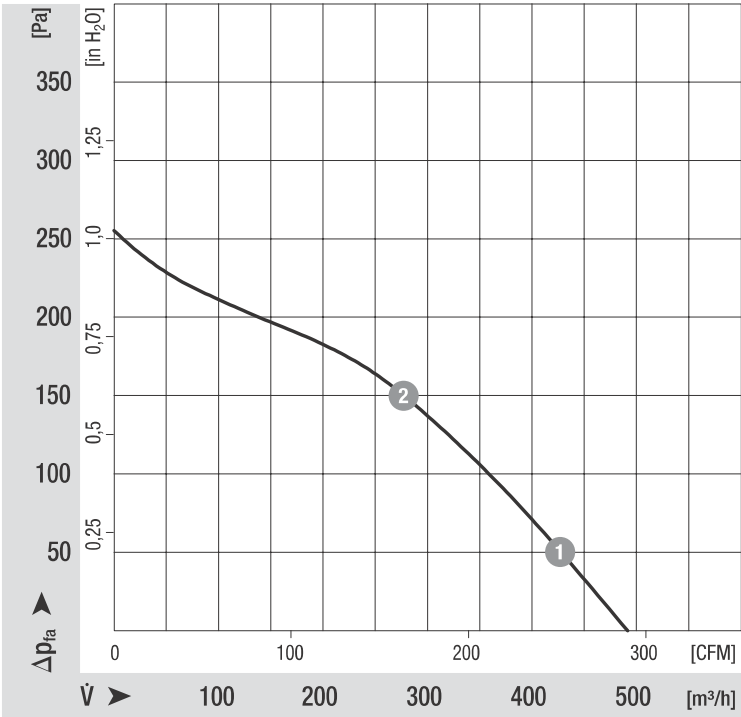

Measured values

	n	P ₁
	min ⁻¹	W
1	2600	51
2	2530	53

Charts: Air flow 60 Hz

