

KARTA KATALOGOWA

R2E220-AB08-62

Wentylator promieniowy AC, łopatki zakrzywione do tyłu


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 115 V	Wielkość	220 mm
Częstotliwość	50 / 60 / 60 Hz	Silnik	M2E068-CF
Prędkość obrotowa	2750 / 3050 / 3050 obr/min	Materiał wirnika	tworzywo PA6 wzmocnione włóknem szklanym
Pobór mocy	93 / 125 / 130 W	Liczba łopatek	11
Pobór prądu	0,8 / 1,1 / 1,15 A	Kierunek obrotów	w prawo, patrząc na wirnik
Kondensator	10 µF / 220 V	Stopień ochrony	IP44
Maks. wydajność	955 m³/h	Klasa izolacji	B
Maks. ciśnienie statyczne	435 Pa	Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Temperatura otoczenia	min. -25 °C; maks. 30 / 35 / 35 °C	Łożyskowanie	kulkowe
		Masa	1,7 kg

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

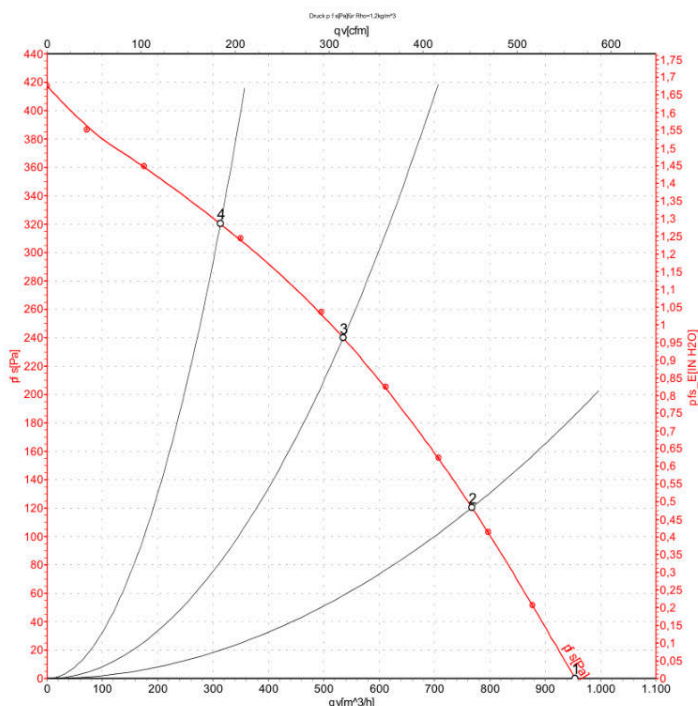

Measurement: LU-32990

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy swobodnym wydmuchu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R2E220-AB08-62

AC centrifugal fan
backward-curved



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	R2E220-AB08-62			
Motor	M2E068-CF			
Phase		1~	1~	1~
Nominal voltage	VAC	115	115	115
Frequency	Hz	50	60	60
Method of obtaining data		fa	fa	fa
Valid for approval/standard		CE	CE	UL 2111
Speed	min ⁻¹	2750	3050	3050
Power consumption	W	93	125	130
Current draw	A	0.8	1.1	1.15
Capacitor	µF	10	10	10
Capacitor voltage	VDB	220	220	220
Capacitor standard		P0 (CE)	P0 (CE)	UL
Min. back pressure	Pa	0	0	0
Min. ambient temperature	°C	-25	-25	-25
Max. ambient temperature	°C	30	35	35

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



R2E220-AB08-62

AC centrifugal fan

backward-curved

Technical description


Weight	1.7 kg
Fan size	220 mm
Rotor surface	Painted black
Impeller material	PA6 plastic, glass-fiber reinforced
Number of blades	11
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F1-2
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor storage	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CCC; CSA C22.2 No. 77; UL 2111

R2E220-AB08-62

AC centrifugal fan

backward-curved

Product drawing

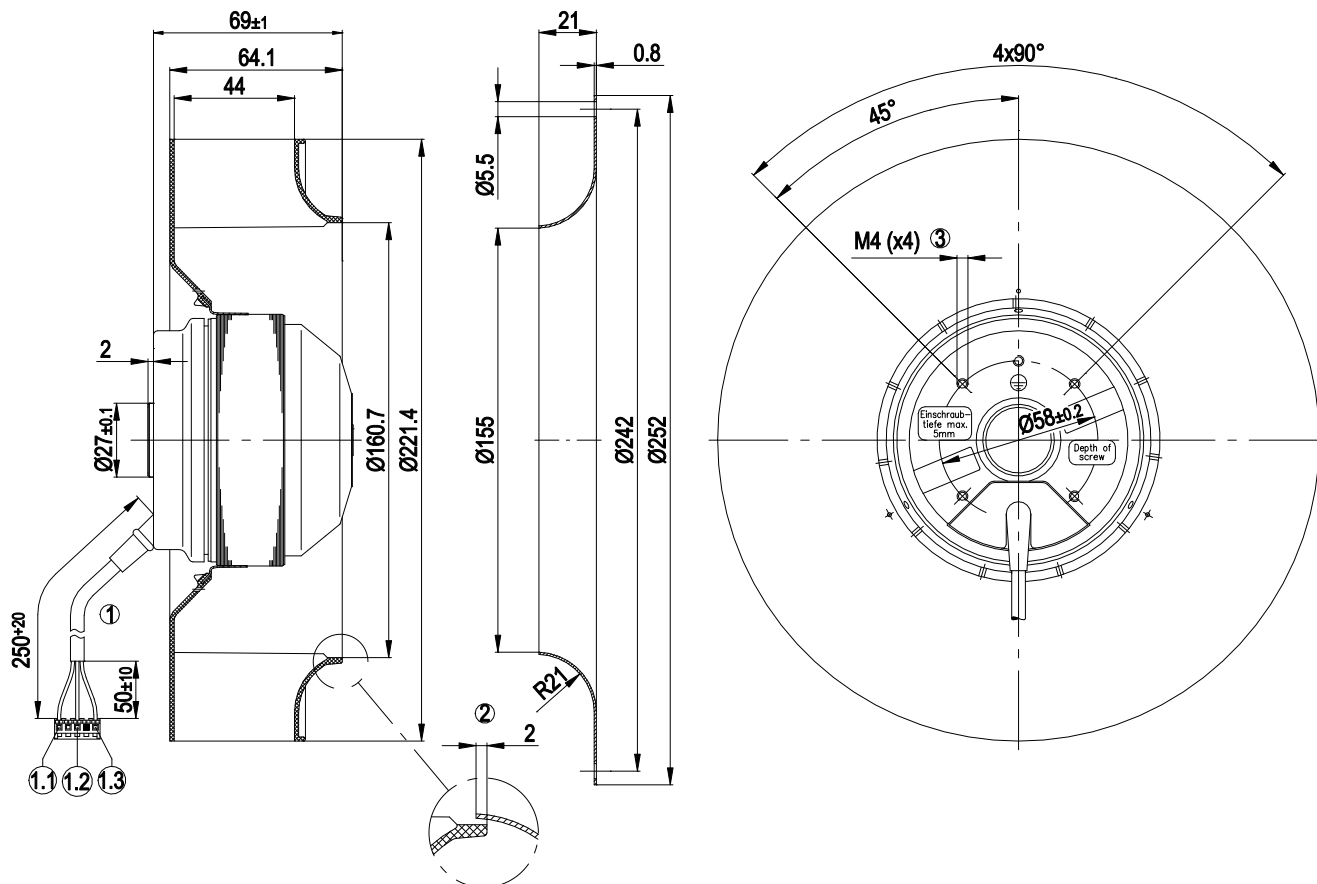


1	Cable PFA AWG18, 1x AMP socket plug 3-644460-5
1.1	blue
1.2	black
1.3	brown
2	Accessory part: inlet ring 09609-2-4013, not included in scope of delivery
3	Max. clearance for screw 5 mm

R2E220-AB08-62

AC centrifugal fan
backward-curved

Connection diagram



U1	blue	Z	brown	U2	black
----	------	---	-------	----	-------




R2E220-AB08-62

AC centrifugal fan

backward-curved

Curves: Air performance 50 Hz

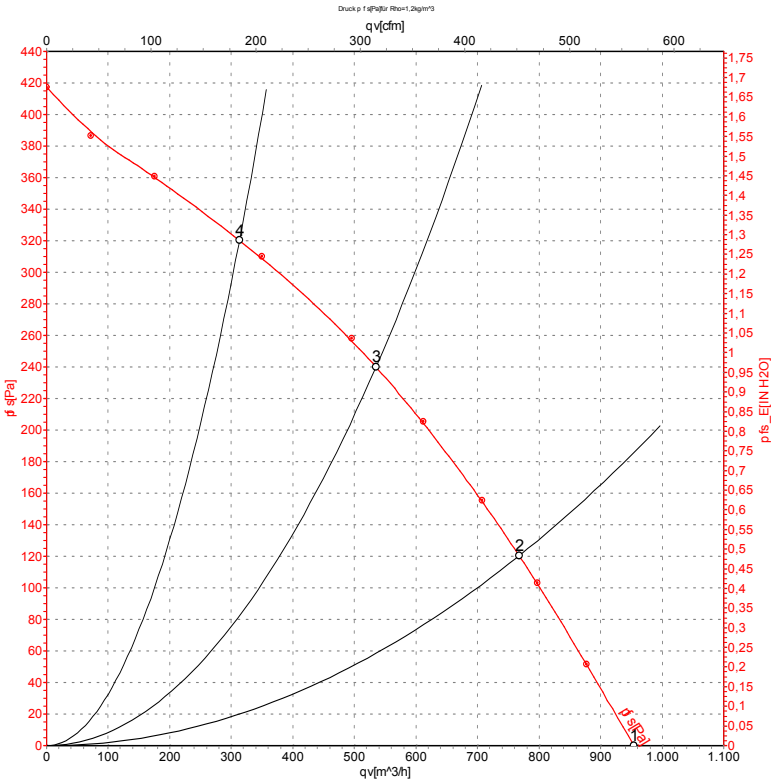

Measurement: LU-32990

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	qv	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa
1	115	50	2750	93	0.80	65	74	955	0
2	115	50	2645	105	0.92	62	71	770	120
3	115	50	2560	115	1.01	58	67	535	240
4	115	50	2595	107	0.94	62	71	315	320


U = Power supply · f = Frequency · n = Speed · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
qv = Air flow · p_{fs} = Pressure increase



R2E220-AB08-62

AC centrifugal fan
backward-curved

Curves: Air performance 60 Hz

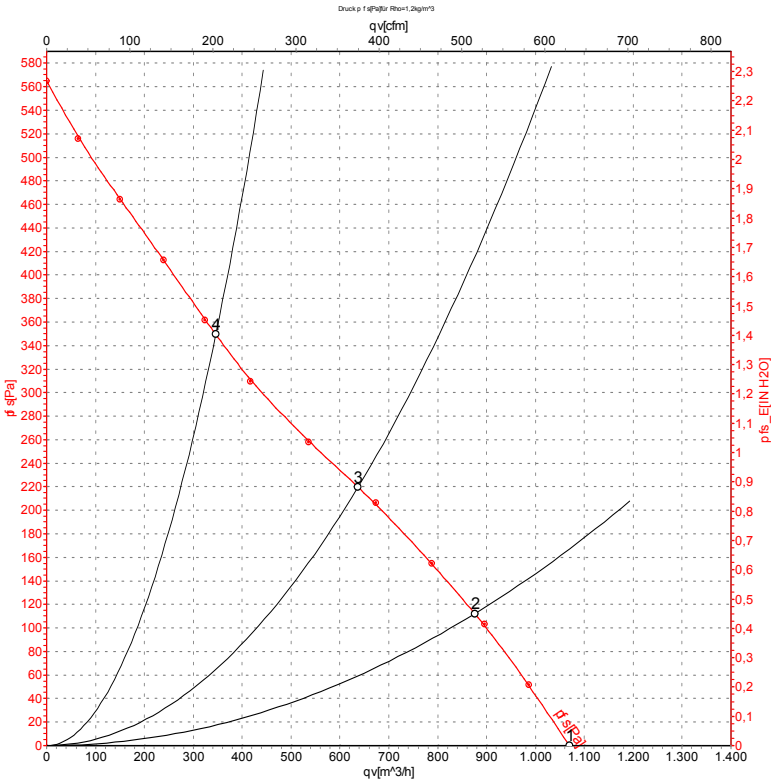

Measurement: LU-32991

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	qv	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa
1	115	60	3050	125	1.10	67	76	1070	0
2	115	60	2900	139	1.21	63	72	875	110
3	115	60	2675	153	1.34	58	67	635	220
4	115	60	2750	148	1.29	62	71	345	350

U = Power supply · f = Frequency · n = Speed · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
qv = Air flow · P_{fs} = Pressure increase

