

KARTA KATALOGOWA

R2E220-AD19-11

Wentylator promieniowy AC, łopatki zakrzywione do tyłu, jednostronnie ssący


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	2~ 415 V	Średnica wirnika	220 mm
Częstotliwość	50 / 60 Hz	Silnik	M2E068-CA
Prędkość obrotowa	2570 / 2750 obr/min	Materiał wirnika	tworzywo PA6 z włóknem szklanym
Pobór mocy	88 / 100 W	Liczba łopatek	11
Pobór prądu	0,22 / 0,25 A	Stopień ochrony	IP44
Kondensator	0,68 μ F / 700 V	Klasa izolacji	F
Maks. wydajność	900 m ³ /h	Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Maks. ciśnienie statyczne	370 Pa	Łożyskowanie	kulkowe
Temperatura otoczenia	-25...+55 °C	Masa	1,6 kg

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

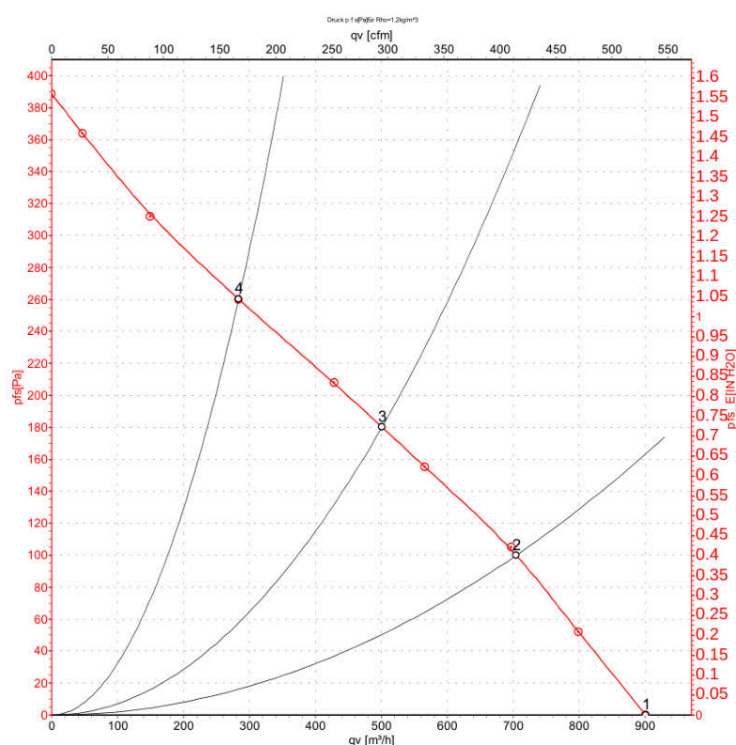

Dane na okładce wg dokumentacji ebm-papst; za okładką oryginalna karta producenta.
Wartości przy swobodnym wydmuchu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R2E220-AD19-11

AC centrifugal fan

backward-curved, single-intake


ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R2E220-AD19-11		
Motor	M2E068-CA		
Phase		2~	2~
Nominal voltage	VAC	415	415
Frequency	Hz	50	60
Method of obtaining data		fa	cs
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	2570	2750
Power consumption	W	88	100
Current draw	A	0.22	0.25
Capacitor	µF	0.68	0.68
Capacitor voltage	VDB	700	700
Capacitor standard		P0 (CE)	P0 (CE)
Min. back pressure	Pa	0	0
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	55	55

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change


ebmpapst

R2E220-AD19-11

AC centrifugal fan

backward-curved, single-intake

Technical description

Weight	1.6 kg
Motor size	220 mm
Rotor surface	Painted black
Impeller material	PA6 plastic, glass-fiber reinforced
Number of blades	11
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	«F»
Moisture (F) / Environmental (H) protection class	F2-2
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0,75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CCC; EAC




R2E220-AD19-11

AC centrifugal fan


backward-curved, single-intake

Product drawing

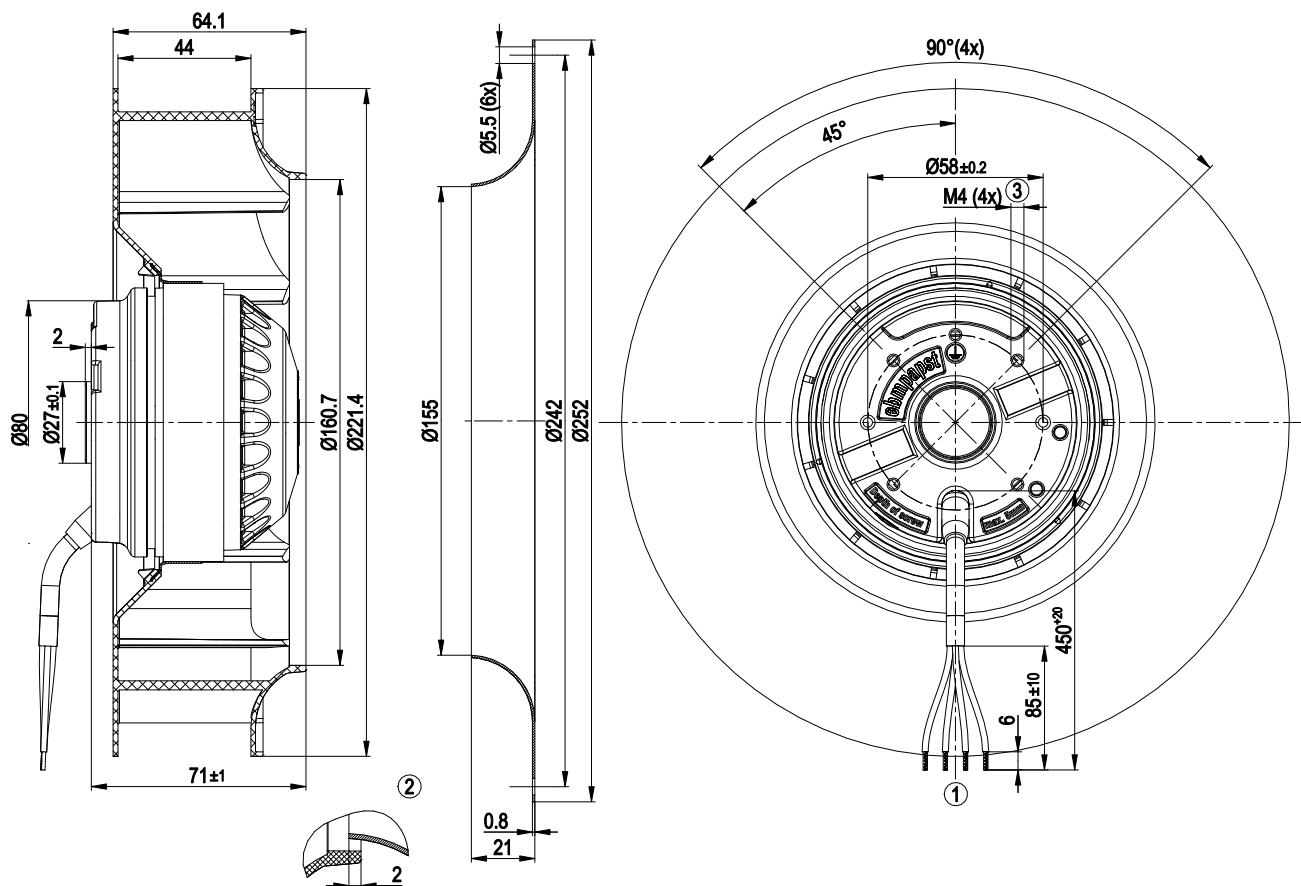

- | | |
|---|---|
| 1 | Cable silicone 4G 0.5 mm ² , 4x crimped ferrules |
| 2 | Accessory part: inlet ring 09609-2-4013 not included in scope of delivery |
| 3 | Max. clearance for screw 5 mm |

Connection diagram




U1	blue	Z	brown	U2	black
PE	green/yellow				

R2E220-AD19-11

AC centrifugal fan

backward-curved, single-intake

Curves: Air performance 50 Hz

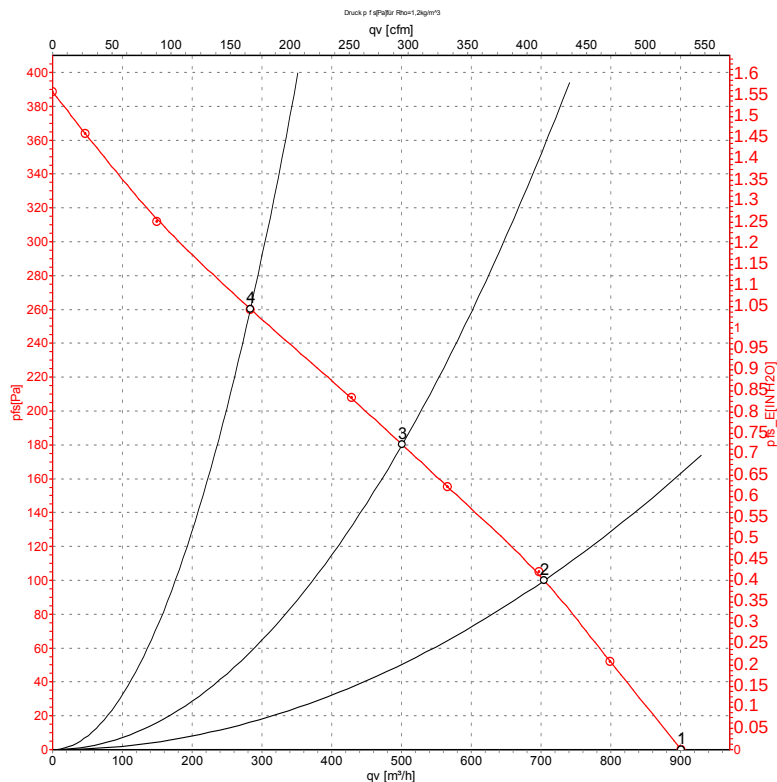

Measurement: LU-42264

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters must be checked in the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	415	50	2570	88	0.22	900	0
2	415	50	2285	95	0.24	705	100
3	415	50	2180	100	0.25	500	180
4	415	50	2230	97	0.25	285	260

U = Power supply · f = Frequency · n = Speed (rpm) · P

e = Power consumption · I = Current draw · qv = Air flow · p

fs = Pressure increase



ebm-papst

R2E220-AD19-11

AC centrifugal fan

backward-curved, single-intake

Curves: Air performance 60 Hz

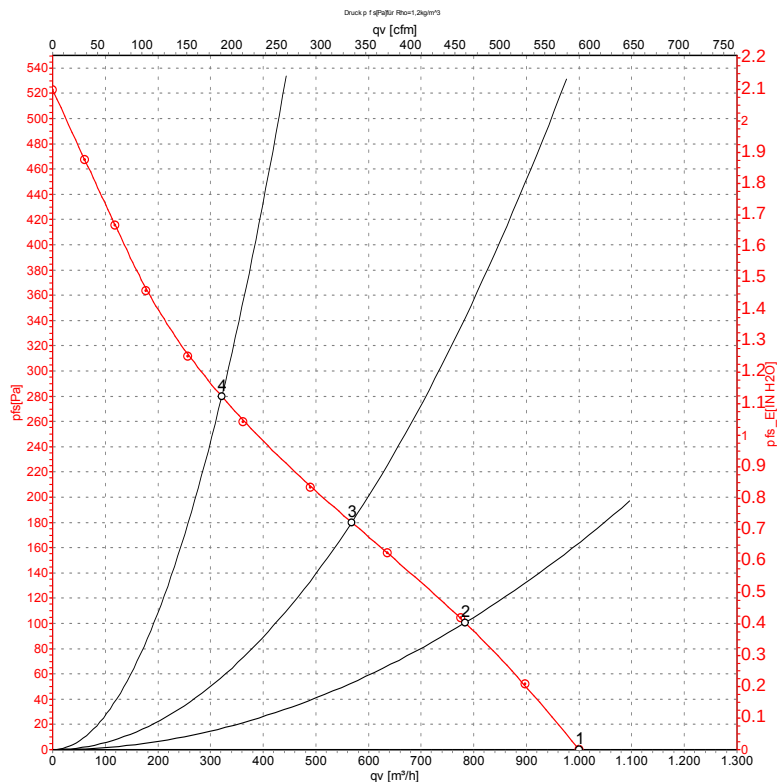

Measurement: LU-43520

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters must be checked in the installed unit.

Measured values

	U	f	n	Pe	I	qv	pts
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	415	60	2750	100	0.25	1000	0
2	415	60	2475	110	0.26	785	100
3	415	60	2285	117	0.28	570	180
4	415	60	2335	114	0.28	320	280

U = Power supply · f = Frequency · n = Speed (rpm) · P

e = Power consumption · I = Current draw · qv = Air flow · p

s = Pressure increase



ebm-papst