

KARTA KATALOGOWA

R2E225-AT52-19

Wentylator promieniowy AC, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst




Zdjęcie poglądowe

Dane znamionowe

Napięcie znamionowe	1~ 230 V
Częstotliwość	50 / 60 Hz
Prędkość obrotowa	2750 / 3150 obr/min
Pobór mocy	105 / 155 W
Pobór prądu	0,47 / 0,69 A
Kondensator	3 µF / 400 V
Prąd rozruchowy	1,2 A
Maks. wydajność	905 m³/h
Maks. ciśnienie statyczne	505 Pa
Temperatura otoczenia	-25...+65 °C (50 Hz)

Budowa

Średnica wirnika	225 mm
Silnik	M2E068-DF
Materiał wirnika	tworzywo PA6 z włóknem szklanym
Liczba łopatek	11
Stopień ochrony	IP44
Klasa izolacji	B
Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Łożyskowanie	kulkowe
Masa	2,4 kg

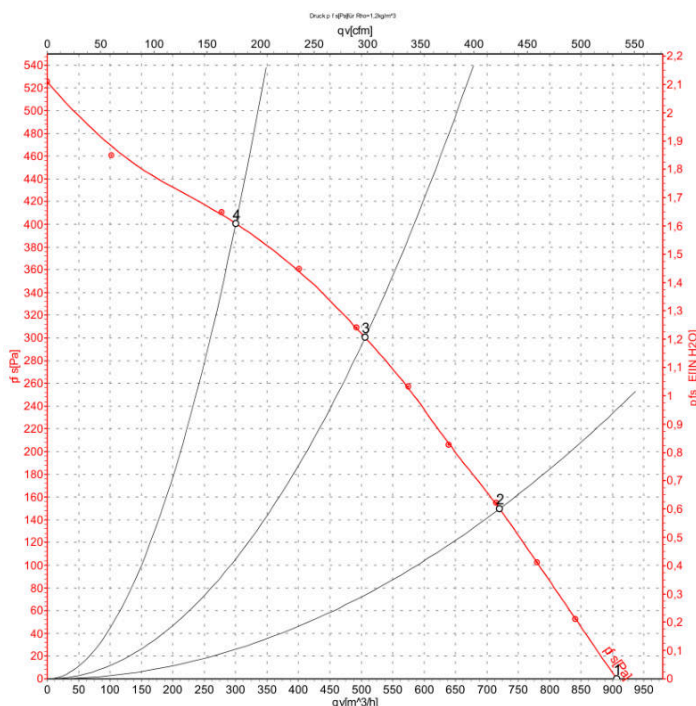Charakterystyka przepływowa (50 Hz)
Charts: Air flow 50 Hz


Measurement: LU-3194

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Dobór, wycena i dostawa – zapytaj LUFTBERG

 tel. +48 600 100 371 · tel. +48 604 959 199
 biuro@luftberg.pl · www.luftberg.pl

R2E225-AT52-19

AC centrifugal fan
backward curved, single inlet

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	R2E225-AT52-19			
Motor	M2E068-DF			
Phase		1~	1~	1~
Nominal voltage	VAC	230	230	230
Frequency	Hz	50	60	60
Type of data definition		fa	fa	fa
Valid for approval / standard		CE	UL 2111	CE
Speed	min ⁻¹	2750	3150	3150
Power input	W	105	190	155
Current draw	A	0.47	0.8	0.69
Motor capacitor	µF	3	3	3
Capacitor voltage	VDB	400	400	400
Min. back pressure	Pa	0	0	0
Max. ambient temperature	°C	65	60	60
Starting current	A	1.2	1.2	1.2

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



R2E225-AT52-19

AC centrifugal fan

backward curved, single inlet

Technical features


Mass	2.4 kg
Size	225 mm
Surface of rotor	Coated in black
Material of impeller	Plastic PA6, fibreglass-reinforced
Number of blades	11
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position
Insulation class	"B"
Humidity class	F1-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE
Approval	CCC; UL 2111; CSA C22.2 Nr.77

R2E225-AT52-19

AC centrifugal fan

backward curved, single inlet

Product drawing

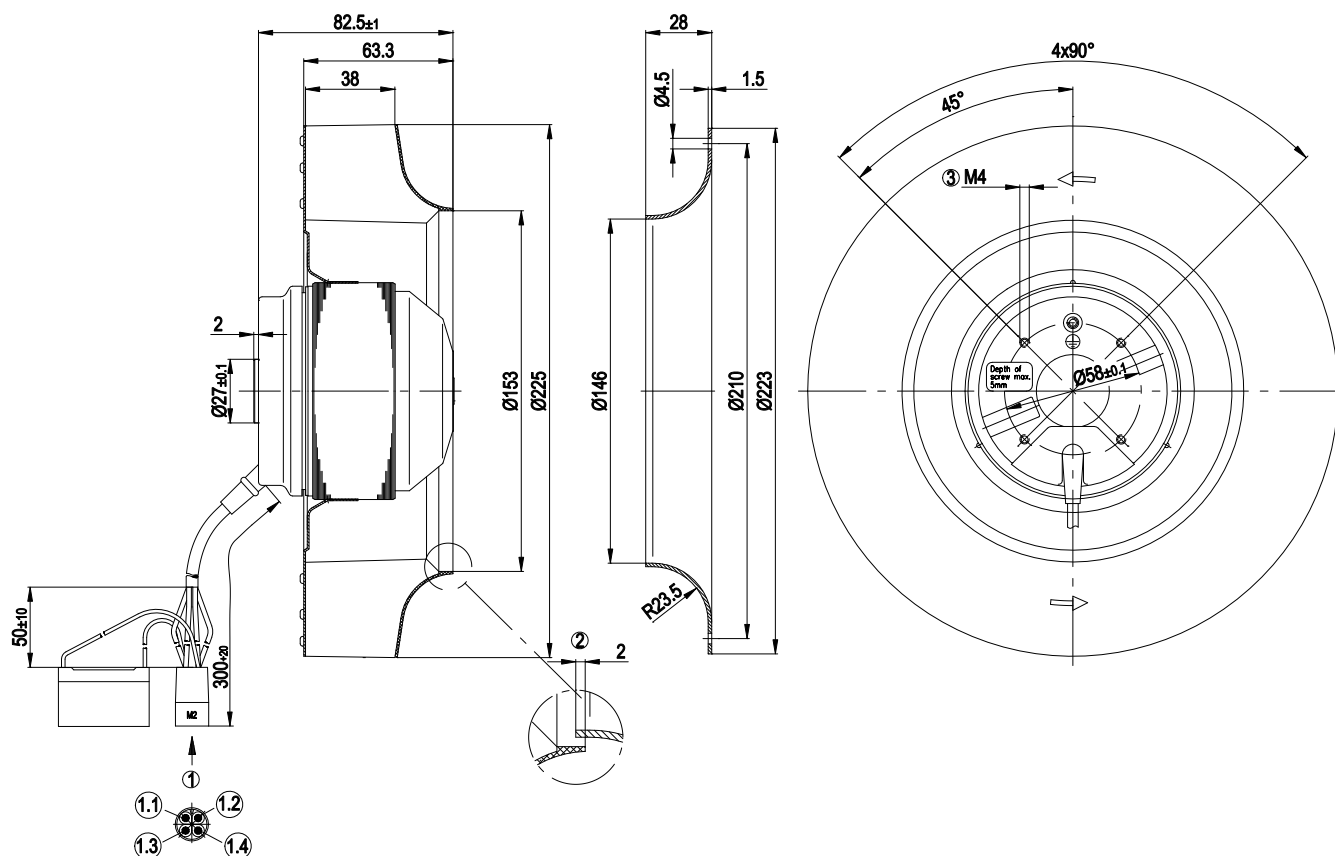


1	Connector housing AMP; Mate-N-Lok
1.1	brown + capacitor
1.2	blue
1.3	green yellow
1.4	black + capacitor
2	Accessory part: Inlet nozzle 96358-2-4013, not included in the standard scope of delivery
3	Depth of screw max. 5 mm

R2E225-AT52-19

AC centrifugal fan
backward curved, single inlet

Connection screen

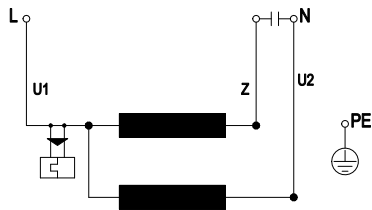


U1	blue	Z	brown	U2	black
PE	green/yellow				



R2E225-AT52-19

AC centrifugal fan
backward curved, single inlet

Charts: Air flow 50 Hz

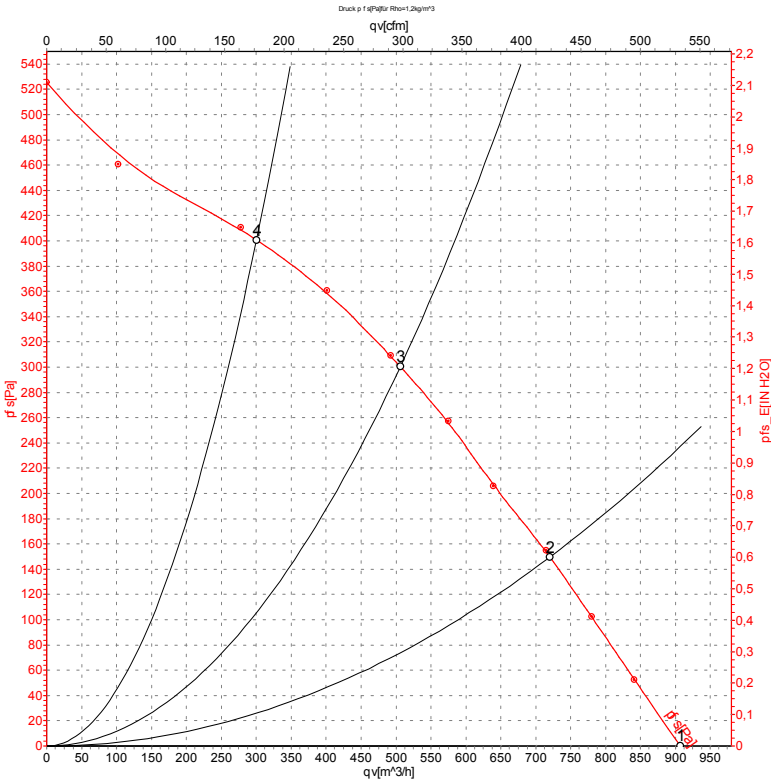

Measurement: LU-3194

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	qv	P _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	50	2775	105	0.47	905	0
2	230	50	2695	118	0.52	720	150
3	230	50	2670	122	0.54	505	300
4	230	50	2720	113	0.49	300	400


U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · P_{fs} = Pressure increase



R2E225-AT52-19

AC centrifugal fan
backward curved, single inlet

Charts: Air flow 60 Hz

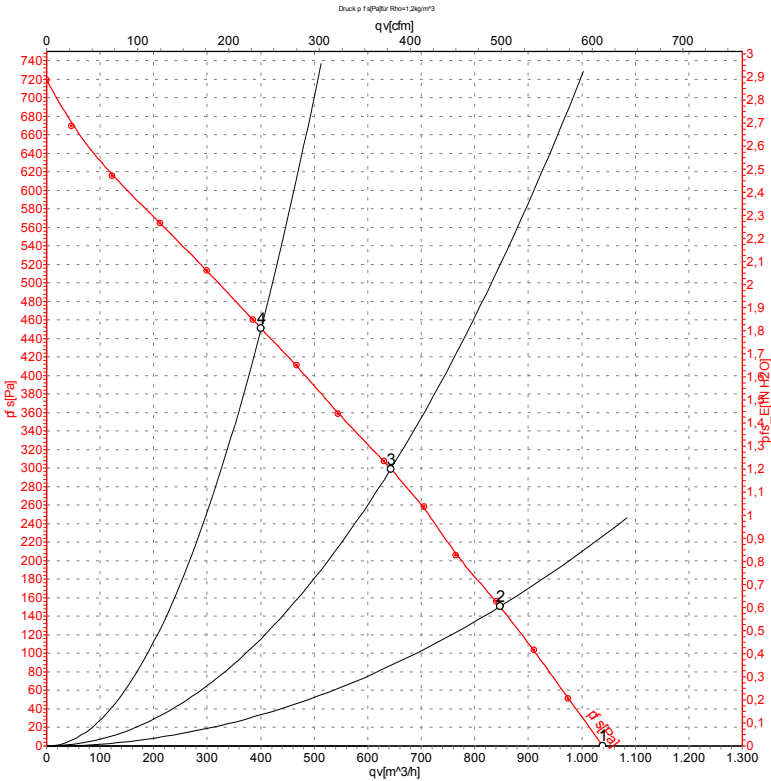

Measurement: LU-3196

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _e	I	qv	P _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	230	60	3150	155	0.69	1040	0
2	230	60	3010	171	0.74	845	150
3	230	60	2925	180	0.78	645	300
4	230	60	2980	173	0.75	400	450

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · P_{fs} = Pressure increase

