

KARTA KATALOGOWA

R2E225-BD64-25

Wentylator promieniowy AC, łopatki zakrzywione do tyłu, jednostronnie ssący


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Średnica wirnika	225 mm
Częstotliwość	50/60 Hz	Materiał wirnika	tworzywo
Prędkość obrotowa	2700 / 3050 obr/min	Liczba łopatek	7
Pobór mocy	136 / 195 W	Stopień ochrony	IP44
Pobór prądu	0,6 / 0,86 A	Klasa izolacji	F
Maks. wydajność	1200 m³/h	Zabezpieczenie silnika	termik (TOP)
Maks. ciśnienie statyczne	400 Pa	Masa	2,4 kg
Temperatura otoczenia	-25...+60 °C (60 Hz: +55 °C)		

Charakterystyka przepływowa

Charts: Air flow 50 Hz

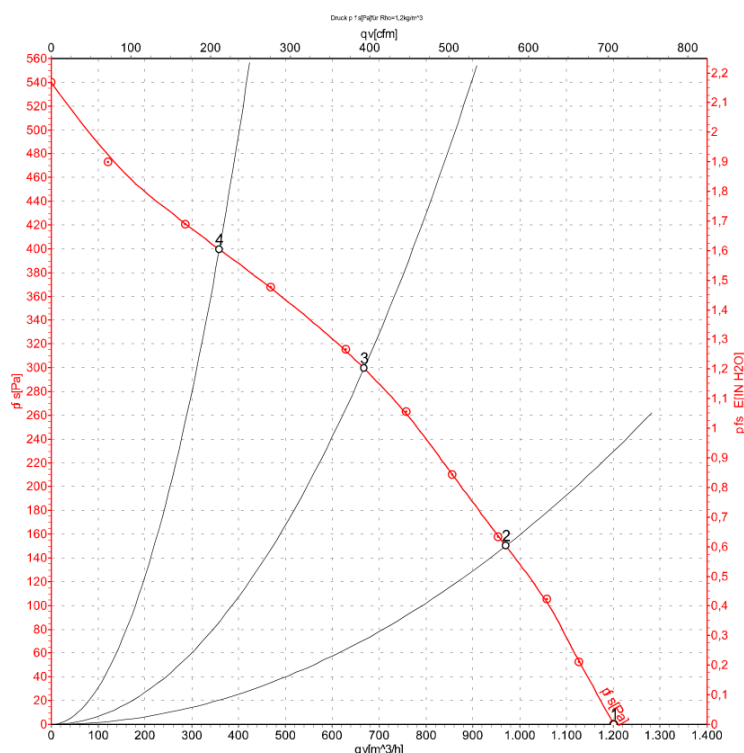

Measurement: LU-53801

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).
Wartości dla 50 Hz / 60 Hz; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R2E225-BD64-25

AC centrifugal fan

backward curved


ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

 Limited partnership · Headquarters Mulfingen
 County court Stuttgart · HRA 590344

 General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
 County court Stuttgart · HRB 590142

Nominal data

Type	R2E225-BD64-25		
Motor	M2E068-DF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Type of data definition		fa	fa
Valid for approval / standard		-	-
Speed	min ⁻¹	2700	3050
Power input	W	136	195
Current draw	A	0.6	0.86
Motor capacitor	µF	4	4
Capacitor voltage	VDB	450	450
Capacitor standard		P2 (CE)	P2 (CE)
Min. back pressure	Pa	0	0
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	60	55
Starting current	A	1.4	1.4

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
 Subject to alterations



R2E225-BD64-25

AC centrifugal fan

backward curved

Technical features

Mass	2.4 kg
Size	225 mm
Surface of rotor	Coated in black
Material of impeller	Plastic PA6, fibreglass-reinforced
Number of blades	7
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"F"
Humidity class	F1-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1
Approval	CSA; CCC; UL




R2E225-BD64-25

AC centrifugal fan

backward curved

Product drawing

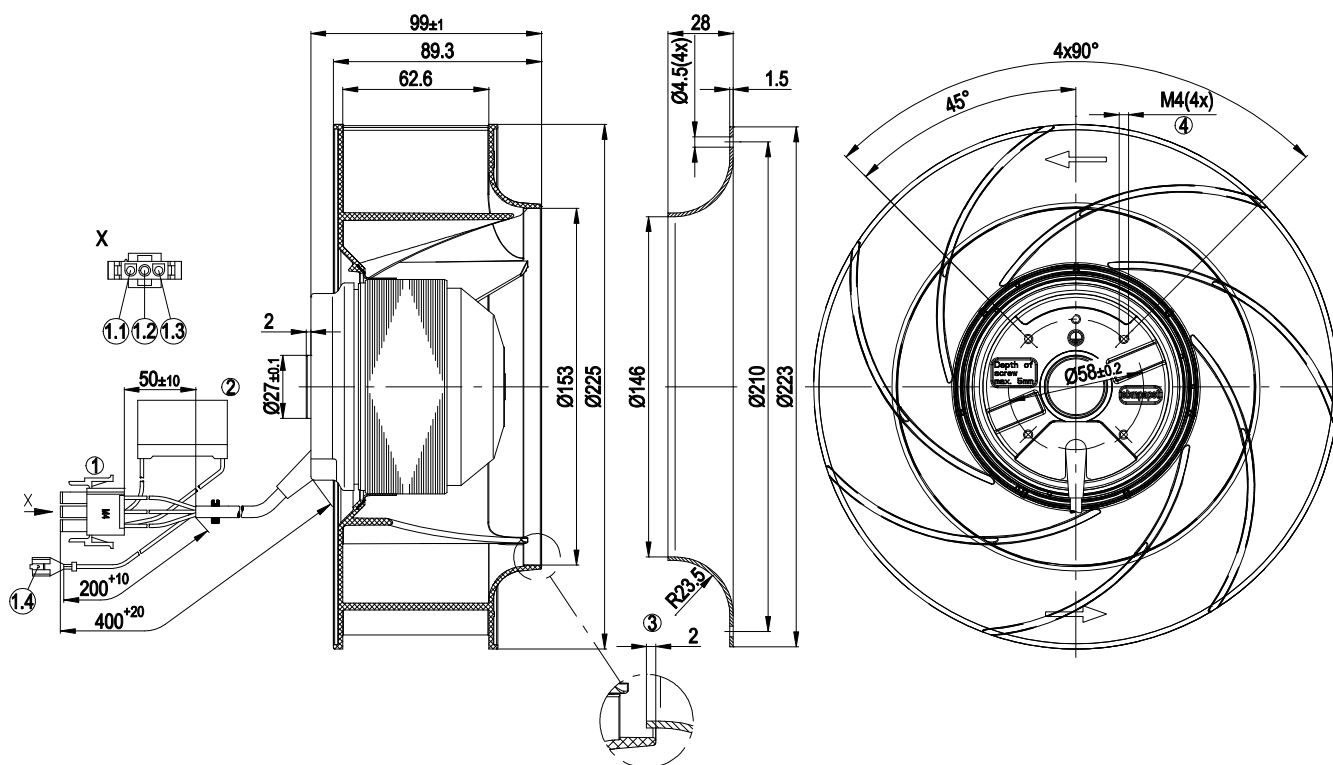


1	Connection line PFA 4G AWG20, AMP connector shell 350766-4 with 2x plug pin 350538-1 and 1x plug pin 926885-1
1.1	Blue
1.2	brown + capacitor
1.3	black + capacitor
1.4	Receptacle for tabs 160389-3 6.3-0.8 (green/yellow)
2	Capacitor with adhesive foil
3	Accessory part: Inlet nozzle 96358-2-4013, not included in the standard scope of delivery
4	Depth of screw max. 5 mm

R2E225-BD64-25

AC centrifugal fan

backward curved

Connection screen



L	blue	N	black	PE	green/yellow
---	------	---	-------	----	--------------




R2E225-BD64-25

AC centrifugal fan

backward curved

Charts: Air flow 50 Hz

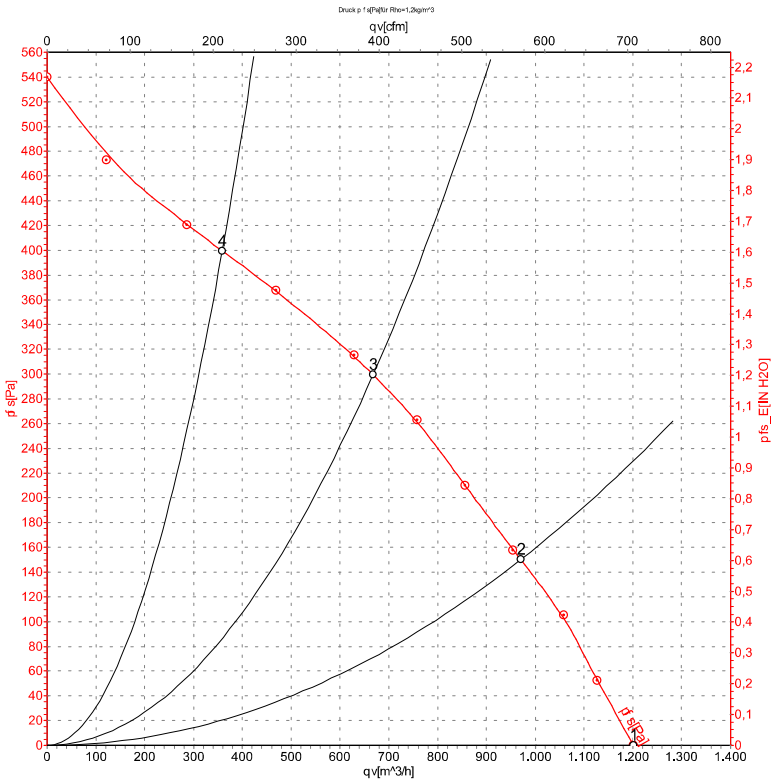

Measurement: LU-53801

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values


	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	50	2700	136	0.60	1200	0
2	230	50	2660	148	0.67	970	150
3	230	50	2615	158	0.70	670	300
4	230	50	2670	146	0.66	360	400

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

R2E225-BD64-25

AC centrifugal fan
backward curved

Charts: Air flow 60 Hz

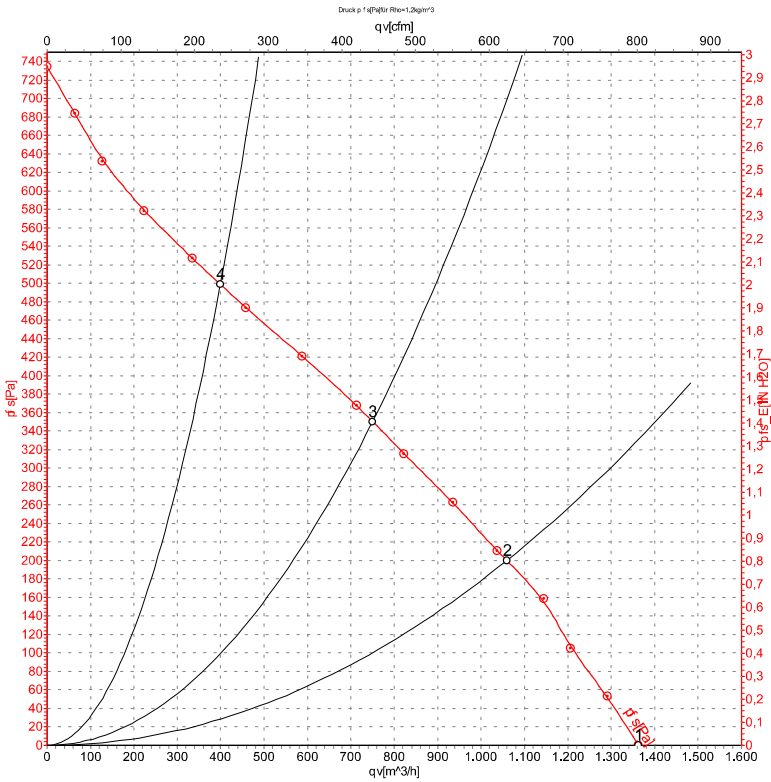

Measurement: LU-53802

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	230	60	3050	195	0.86	1365	0
2	230	60	2970	208	0.91	1060	200
3	230	60	2865	221	0.96	750	350
4	230	60	2980	206	0.90	400	500

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

