

KARTA KATALOGOWA

R2E225-BD92-36

Wentylator promieniowy AC, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst




Zdjęcie poglądowe

Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Średnica wirnika	225 mm
Częstotliwość	50/60 Hz	Materiał wirnika	tworzywo PA
Prędkość obrotowa	2650 / 2950 obr/min	Stopień ochrony	IP44
Pobór mocy	135 / 210 W	Klasa izolacji	F
Pobór prądu	0,6 / 0,93 A	Zabezpieczenie silnika	termik (TOP)
Maks. wydajność	1210 m³/h	Masa	2,32 kg
Maks. ciśnienie statyczne	400 Pa		
Temperatura otoczenia	-25...+55 °C		

Charakterystyka przepływowa

Curves: Air performance 50 Hz

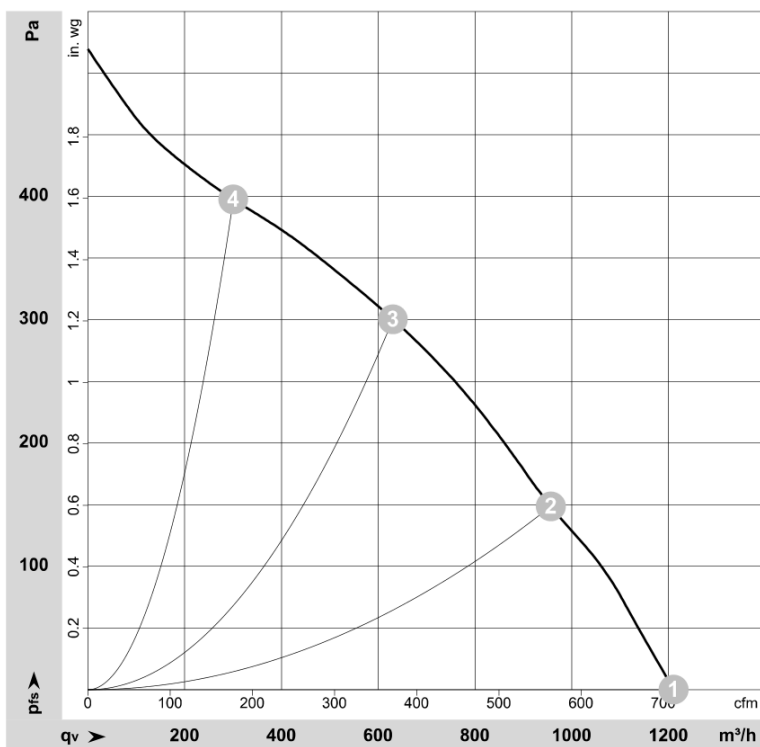
 $\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-57084-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).
Wartości dla 50 Hz / 60 Hz; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R2E225-BD92-36

AC centrifugal fan

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R2E225-BD92-36			
Motor	M2E068-DF			
Phase		1~	1~	1~
Nominal voltage	VAC	230	230	230
Frequency	Hz	50	60	60
Method of obtaining data		fa	fa	fa
Valid for approval/standard		-	UL 2111	-
Speed (rpm)	min ⁻¹	2650	2950	2950
Power consumption	W	135	210	200
Current draw	A	0.6	0.93	0.88
Capacitor	µF	4	4	4
Capacitor voltage	VDB	450	450	450
Min. back pressure	Pa	0	0	0
Min. back pressure	in. wg	0	0	0
Min. ambient temperature	°C	-25	-25	-25
Max. ambient temperature	°C	55	55	55
Starting current	A	1.2	1.2	1.2

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



R2E225-BD92-36

AC centrifugal fan

backward-curved, single-intake

Technical description

Weight	2.32 kg
Size	225 mm
Motor size	68
Rotor surface	Painted black
Impeller material	PA plastic
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1
Approval	UL 1004-3; CSA C22.2 No. 77




R2E225-BD92-36

AC centrifugal fan


backward-curved, single-intake

Product drawing

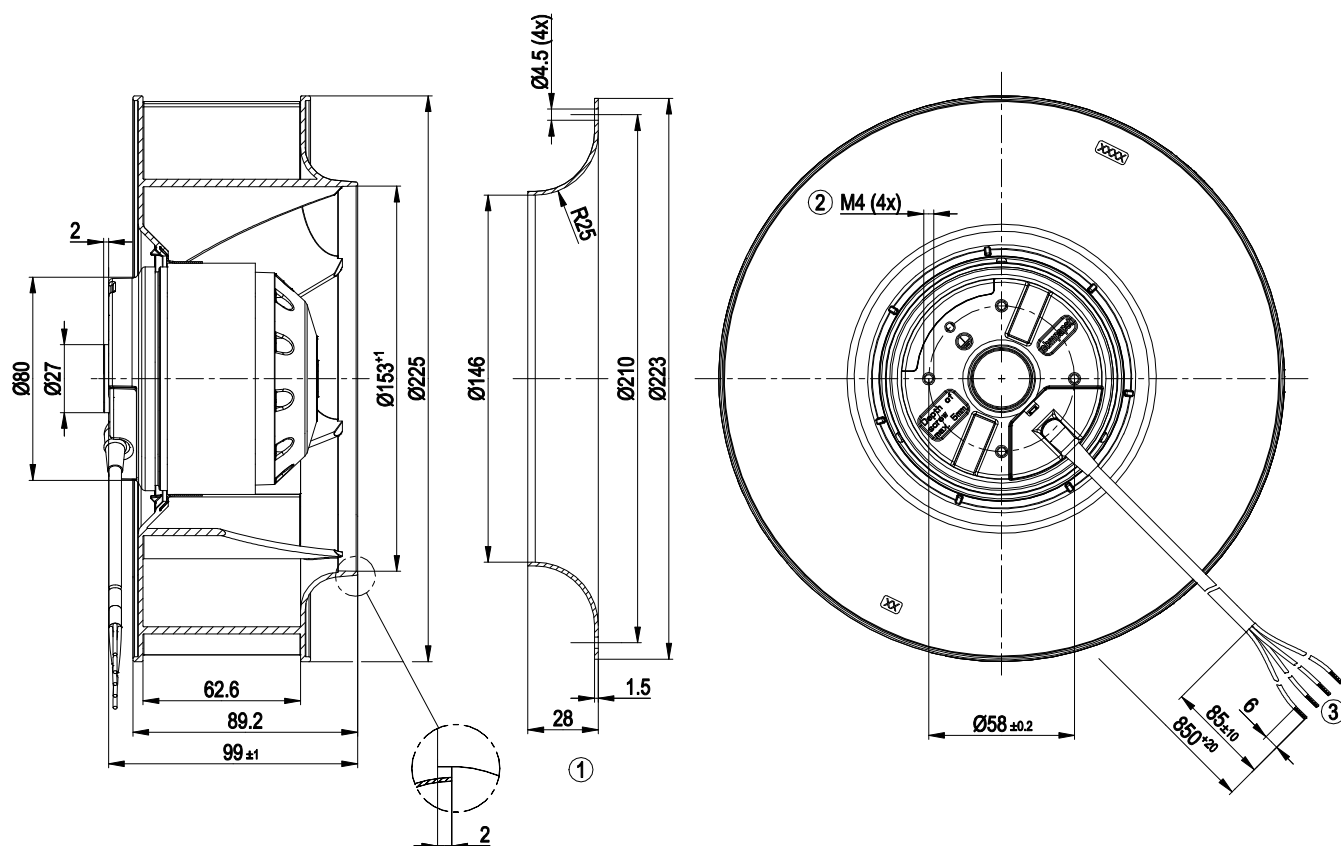

- | | |
|---|---|
| 1 | Accessory part: inlet ring 96358-2-4013 not included in scope of delivery |
| 2 | Max. clearance for screw 5 mm |
| 3 | Cable PFA 4G AWG20, 4x crimped splices |

Connection diagram




U1	blue	Z	brown	U2	black
PE	green/yellow				

R2E225-BD92-36

AC centrifugal fan

backward-curved, single-intake

Curves: Air performance 50 Hz

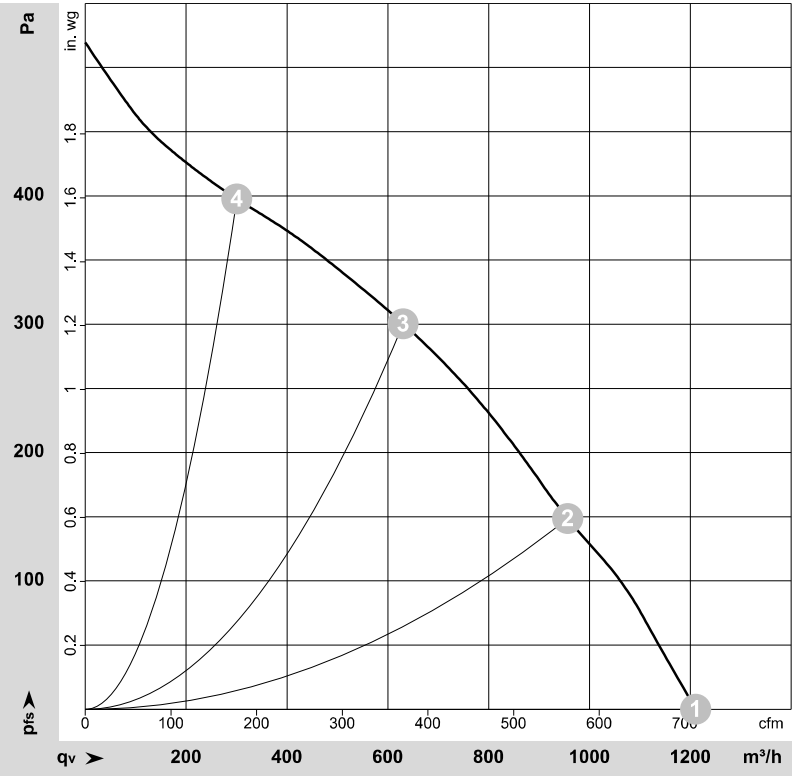

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-57084-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	1~	230	50	2700	135	0.60	1210	0	710	0.00
2	1~	230	50	2660	138	0.60	955	150	565	0.60
3	1~	230	50	2595	150	0.65	630	300	370	1.20
4	1~	230	50	2675	134	0.58	300	400	175	1.61

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase




R2E225-BD92-36

AC centrifugal fan

backward-curved, single-intake

Curves: Air performance 60 Hz

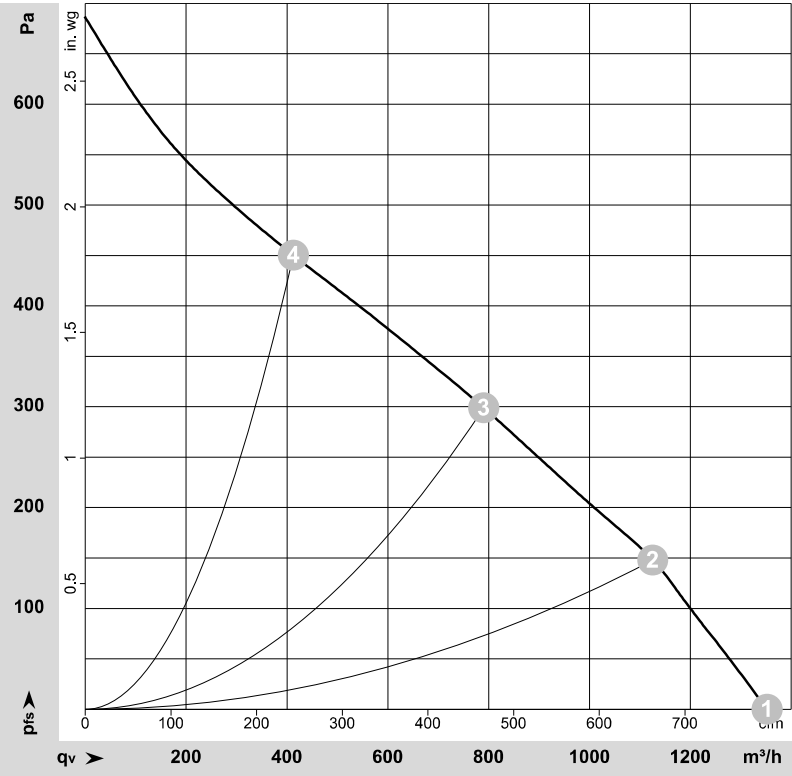

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-57085-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	1~	230	60	2950	200	0.88	1350	0	795	0.00
2	1~	230	60	2905	207	0.91	1125	150	660	0.60
3	1~	230	60	2785	217	0.94	790	300	465	1.20
4	1~	230	60	2875	208	0.91	415	450	245	1.81

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

