

KARTA KATALOGOWA

R2E225-RA92-20

Wentylator promieniowy AC RadiCal, łopatki zakrzywione do tyłu

Producent: ebm-papst



Dane znamionowe

Napięcie znamionowe	1~ 230 V
Częstotliwość	60 Hz
Prędkość obrotowa	2600 obr/min
Pobór mocy	210 / 225 W
Pobór prądu	0,92 / 0,95 A
Prąd rozruchowy	1,2 A
Kondensator	3,5 µF / 450 V
Maks. wydajność	1300 m³/h
Maks. ciśnienie statyczne	785 Pa
Temperatura otoczenia	-25...+45 °C

Dane ErP (UE 327/2011)


Sprawność całkowita	42,5 %
Przepływ w pkt. optymalnym	705 m³/h
Przyrost ciśnienia	320 Pa
Regulacja prędkości (ErP)	nie

Budowa

Wielkość	225 mm
Silnik	M2E068-DF
Materiał wirnika	tworzywo PA
Liczba łopatek	7
Kierunek obrotów	w prawo, patrząc na wirnik
Stopień ochrony	IP44
Klasa izolacji	B
Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Łożyskowanie	kulkowe
Masa	2,3 kg

Charakterystyka przepływowa (60 Hz)

Charts: Air flow 60 Hz

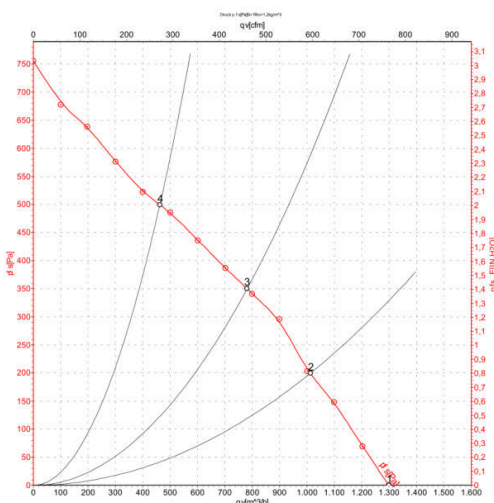

Measurement: LU-127148

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{wk} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R2E225-RA92-20

AC centrifugal fan - RadiCal®

backward curved



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	R2E225-RA92-20		
Motor	M2E068-DF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	60	60
Type of data definition		ml	ml
Valid for approval / standard		CE	UL 2111
Speed	min ⁻¹	2600	2600
Power input	W	210	225
Current draw	A	0.92	0.95
Motor capacitor	µF	3.5	3.5
Capacitor voltage	VDB	450	450
Capacitor standard			UL
Min. back pressure	Pa	0	0
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	45	45
Starting current	A	1.2	

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio*	1.00

* Specific ratio = 1 + p_{fs} / 100 000 Pa

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}		42.5	38.5	42.5
Efficiency grade N		62	58	62
Power input P _e	kW	0.14		
Air flow q _v	m ³ /h	705		
Pressure increase p _{fs}	Pa	320		
Speed n	min ⁻¹	2560		

Data definition with optimum efficiency.



R2E225-RA92-20

AC centrifugal fan - RadiCal®

backward curved


Technical features

Mass	2.3 kg
Size	225 mm
Surface of rotor	Uncoated
Material of impeller	PA plastic
Number of blades	7
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position
Insulation class	"B"
Humidity class	F0
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE
Approval	UL 2111; CSA C22.2 Nr.77

R2E225-RA92-20


AC centrifugal fan - RadiCal®
backward curved

Product drawing

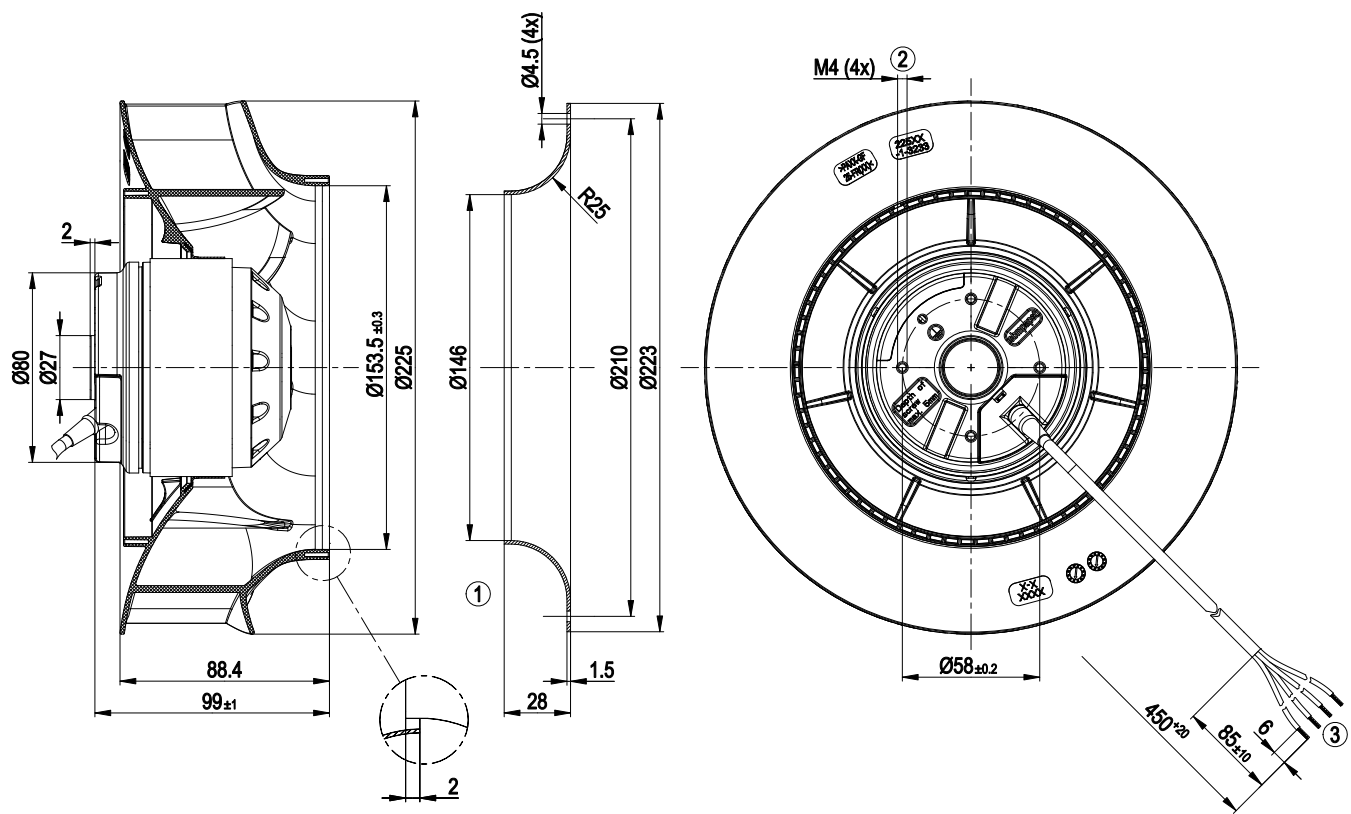

1	Accessory part: inlet nozzle 96358-2-4013 not included in scope of delivery
2	Depth of screw max. 5 mm
3	Connection line PVC AWG20, 4x lead tips crimped

Connection screen



U1	blue	Z	brown	U2	black
PE	green/yellow				




R2E225-RA92-20

AC centrifugal fan - RadiCal®

backward curved

Charts: Air flow 60 Hz

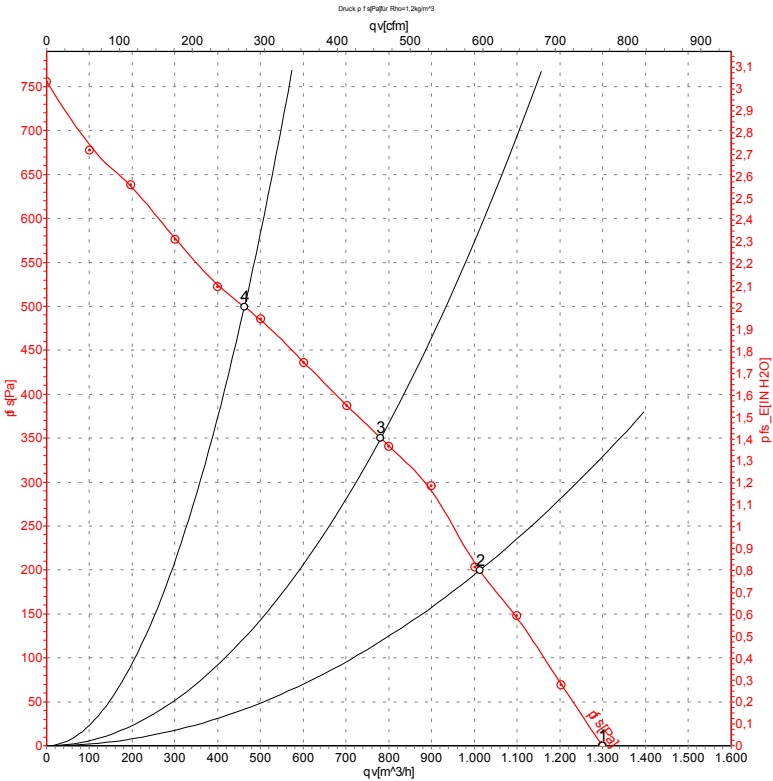

Measurement: LU-127148

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	qv	p _{ts}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa
1	230	60	2900	190	0.83	69	76	1300	0
2	230	60	2700	210	0.92	64	72	1010	200
3	230	60	2700	207	0.90	60	68	780	350
4	230	60	2815	196	0.85	66	73	460	500

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · qv = Air flow
p_{ts} = Pressure increase

