

KARTA KATALOGOWA

R2E225-RA92-31

Wentylator promieniowy AC RadiCal, łopatki zakrzywione do tyłu

Producent: ebm-papst




Zdjęcie poglądowe

Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Wielkość	225 mm
Częstotliwość	50 / 60 / 60 Hz	Silnik	M2E068-DF
Prędkość obrotowa	2500 / 2600 / 2600 obr/min	Materiał wirnika	tworzywo PA
Pobór mocy	155 / 210 / 225 W	Liczba łopatek	7
Pobór prądu	0,68 / 0,92 / 0,95 A	Kierunek obrotów	w prawo, patrząc na wirnik
Prąd rozruchowy	1,25 / 1,2 A	Stopień ochrony	IP44
Kondensator	3,5 µF / 450 V	Klasa izolacji	F
Maks. wydajność	1150 m³/h	Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Maks. ciśnienie statyczne	560 Pa	Łożyskowanie	kulkowe
Temperatura otoczenia	min. -25 °C; maks. 70 / 65 / 65 °C	Podłączenie	złącze z przewodem
		Masa	2,3 kg

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

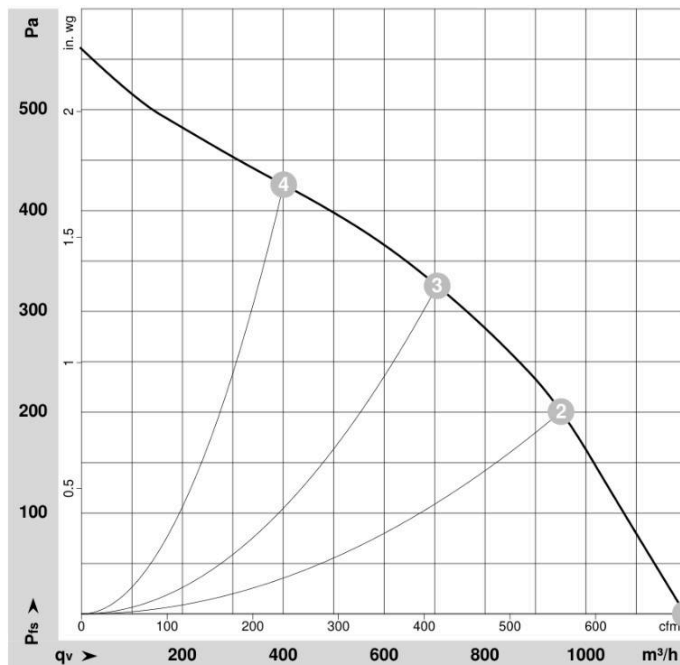

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-154575-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R2E225-RA92-31

AC centrifugal fan - RadiCal

backward-curved

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	R2E225-RA92-31			
Motor	M2E068-DF			
Phase		1~	1~	1~
Nominal voltage	VAC	230	230	230
Frequency	Hz	50	60	60
Method of obtaining data		ml	ml	ml
Valid for approval/standard		-	-	UL 2111
Speed (rpm)	min ⁻¹	2500	2600	2600
Power consumption	W	155	210	225
Current draw	A	0.68	0.92	0.95
Capacitor	µF	3.5	3.5	3.5
Capacitor voltage	VDB	450	450	450
Capacitor standard				UL
Min. back pressure	Pa	0	0	0
Min. back pressure	in. wg	0	0	0
Min. ambient temperature	°C	-25	-25	-25
Max. ambient temperature	°C	70	65	65
Starting current	A	1.25	1.2	

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



R2E225-RA92-31
Rittal RSC GmbH & Co. KG

AC centrifugal fan - RadiCal

backward-curved

Technical description

Weight	2.3 kg
Size	225 mm
Motor size	68
Rotor surface	Painted black
Impeller material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Connector with cable
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Motor capacitor according to EN 60252-1 in safety protection class	S0
Conformity with standards	EN 60335-1
Comment on CE	Commissioning not permitted in the European Economic Area
Approval	CSA C22.2 No. 77; CCC; UL 1004-3


R2E225-RA92-31

Rittal RSC GmbH & Co. KG

AC centrifugal fan - RadiCal

backward-curved

Product drawing

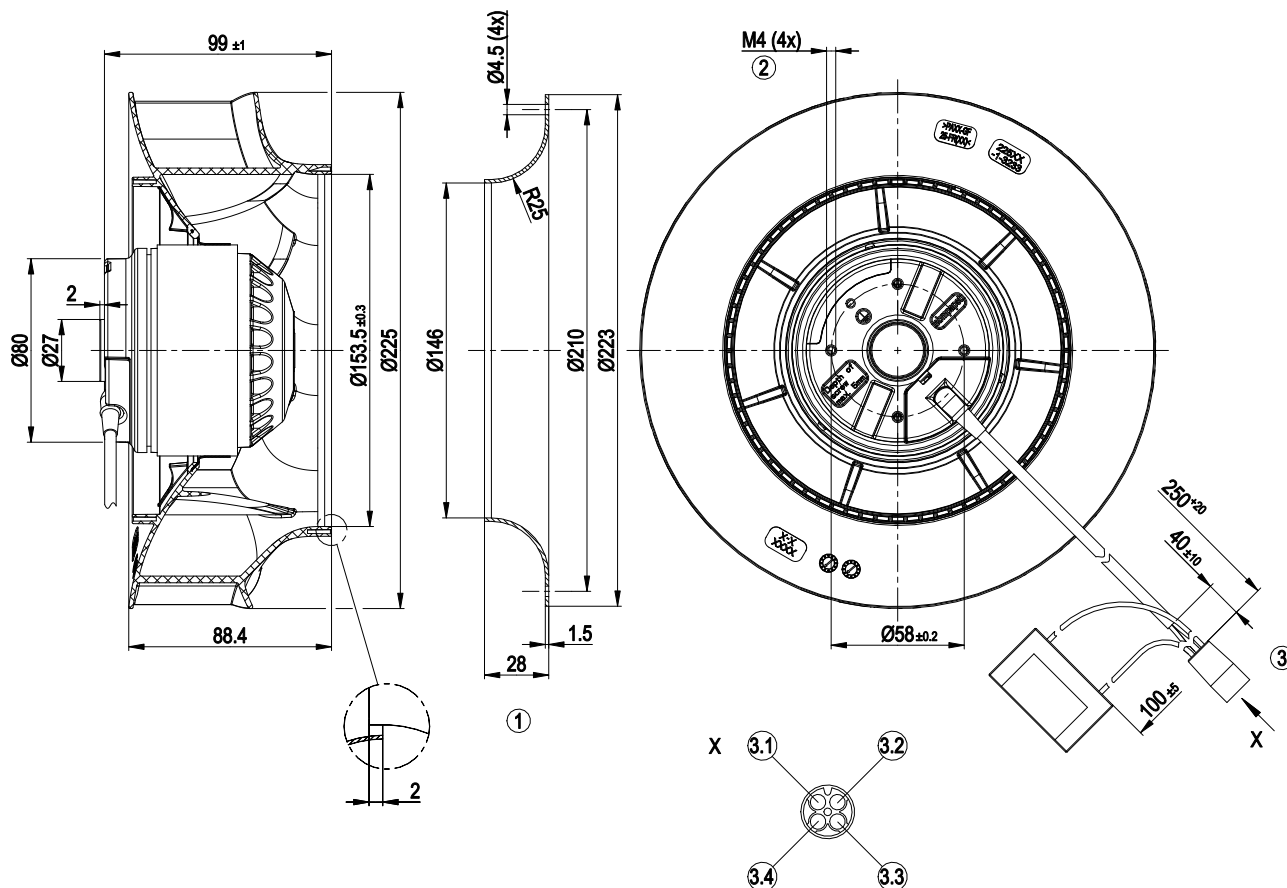


1	Accessory part: inlet ring 96358-2-4013 not included in scope of delivery
2	Max. clearance for screw 5 mm
3	Cable PFA AWG20, 1x 4-pole connector housing Tyco 0-925075-0, 2x plug pin Tyco 163555-6, 2x plug pin Tyco 163303-8
3.1	Z (brown + capacitor)
3.2	N (black + capacitor)
3.3	L (blue)
3.4	PE (green/yellow)

R2E225-RA92-31
Rittal RSC GmbH & Co. KG

AC centrifugal fan - RadiCal
backward-curved

Connection diagram



L	blue	N	black	PE	green/yellow
---	------	---	-------	----	--------------




R2E225-RA92-31

Rittal RSC GmbH & Co. KG

AC centrifugal fan - RadiCal

backward-curved

Curves: Air performance 50 Hz

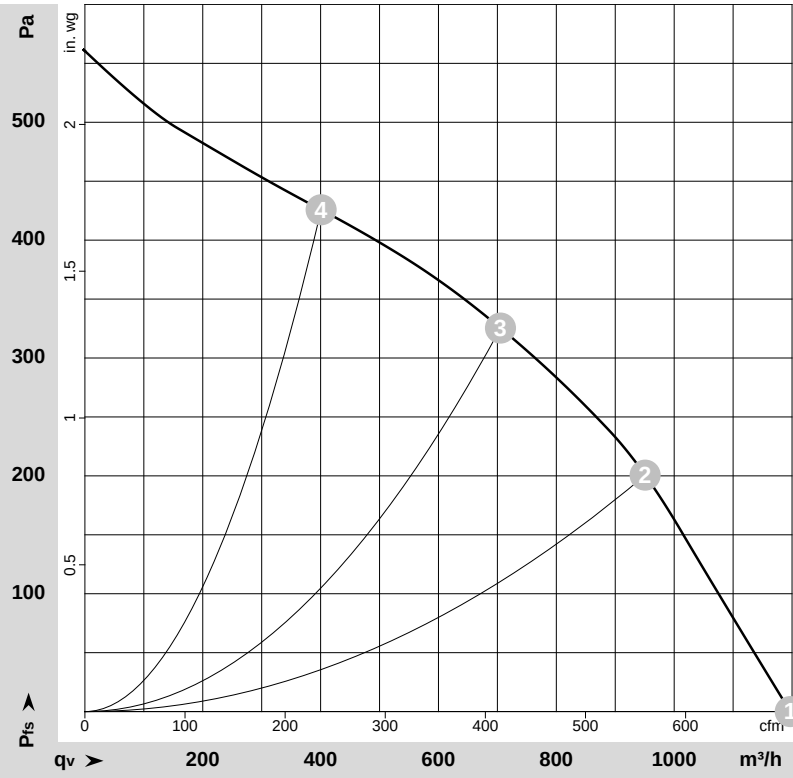

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-154575-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	1~	230	50	2660	132	0.58	66	73	1195	0	705	0.00
2	1~	230	50	2500	155	0.68	63	70	950	200	560	0.80
3	1~	230	50	2555	150	0.66	58	66	705	325	415	1.30
4	1~	230	50	2625	138	0.60	63	70	400	425	235	1.71

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · P_{fs} = Pressure increase




R2E225-RA92-31

Rittal RSC GmbH & Co. KG

AC centrifugal fan - RadiCal

backward-curved

Curves: Air performance 60 Hz

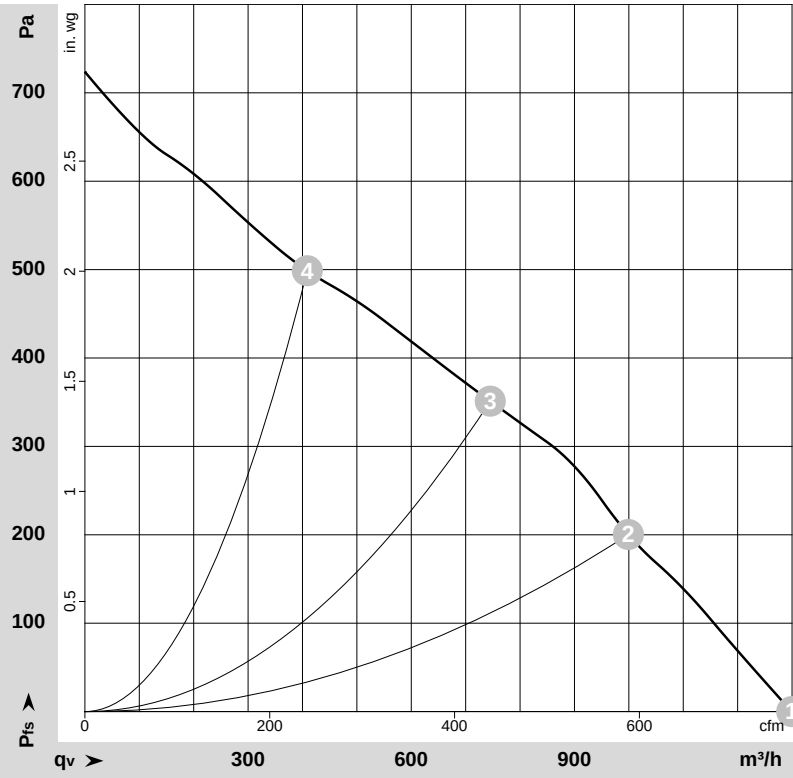

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-127148-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	1~	230	60	2930	187	0.81	69	76	1300	0	765	0.00
2	1~	230	60	2700	210	0.92	64	71	1000	200	590	0.80
3	1~	230	60	2700	207	0.90	60	68	745	350	440	1.41
4	1~	230	60	2860	192	0.83	67	75	410	500	240	2.01

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

