

KARTA KATALOGOWA

R2E225-RC66-04

Wentylator promieniowy AC RadiCal, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst



Zdjęcie poglądowe


Dane znamionowe	
Napięcie znamionowe	1~ 230 V
Częstotliwość	50/60 Hz
Prędkość obrotowa	2550 / 2650 obr/min
Pobór mocy	160 / 220 W
Pobór prądu	0,7 / 1 A
Kondensator	4,5 µF / 400 V
Maks. wydajność	1240 m³/h
Maks. ciśnienie statyczne	570 Pa
Temperatura otoczenia	-25...+75 °C (60 Hz: +55 °C)

Dane ErP (UE 327/2011)	
Sprawność całkowita	45,2 %
Przepływ w pkt. optymalnym	730 m³/h
Przyrost ciśnienia	344 Pa
Regulacja obrotów	nie

Budowa	
Średnica wirnika	225 mm
Materiał wirnika	tworzywo PA
Liczba łopatek	7
Stopień ochrony	IP44
Klasa izolacji	F
Zabezpieczenie silnika	termik (TOP)
Masa	2,18 kg

Charakterystyka przepływowa

Curves: Air performance 50 Hz

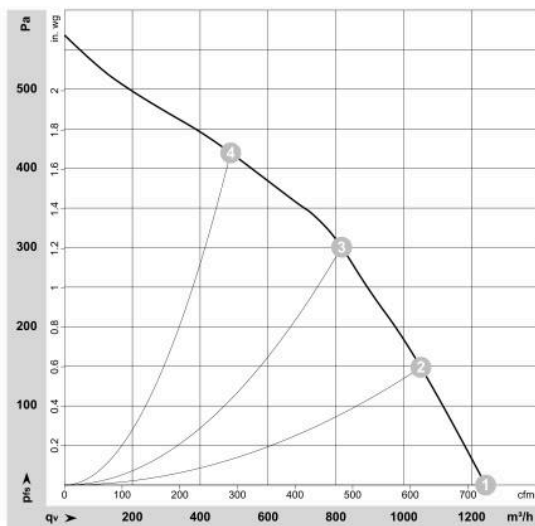
 $\rho = 1,15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-189568-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Initial sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).
Wartości dla 50 Hz / 60 Hz; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R2E225-RC66-04

AC centrifugal fan - RadiCal

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R2E225-RC66-04		
Motor	M2E068-DF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		ml	ml
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	2550	2650
Power consumption	W	160	220
Current draw	A	0.7	1.0
Capacitor	µF	4.5	4.5
Capacitor voltage	VDB	400	400
Capacitor standard		S0 (CE)	S0 (CE)
Min. back pressure	Pa	0	0
Min. back pressure	in. wg	0	0
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	75	55
Starting current	A	1.3	1.3

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	45.2	43	09 Power consumption P_e	kW	0.15
02 Measurement category		A		09 Air flow q_v	m³/h	730
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	344
04 Efficiency grade N		64.2	62	10 Speed (rpm) n	min ⁻¹	2600
05 Variable speed drive		No		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

 * Specific ratio = $1 + p_b / 100\,000\text{ Pa}$

LU-189568



R2E225-RC66-04

AC centrifugal fan - RadiCal

backward-curved, single-intake

Technical description


Weight	2.18 kg
Size	225 mm
Motor size	68
Rotor surface	Painted black
Impeller material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE

R2E225-RC66-04

AC centrifugal fan - RadiCal

backward-curved, single-intake

Product drawing

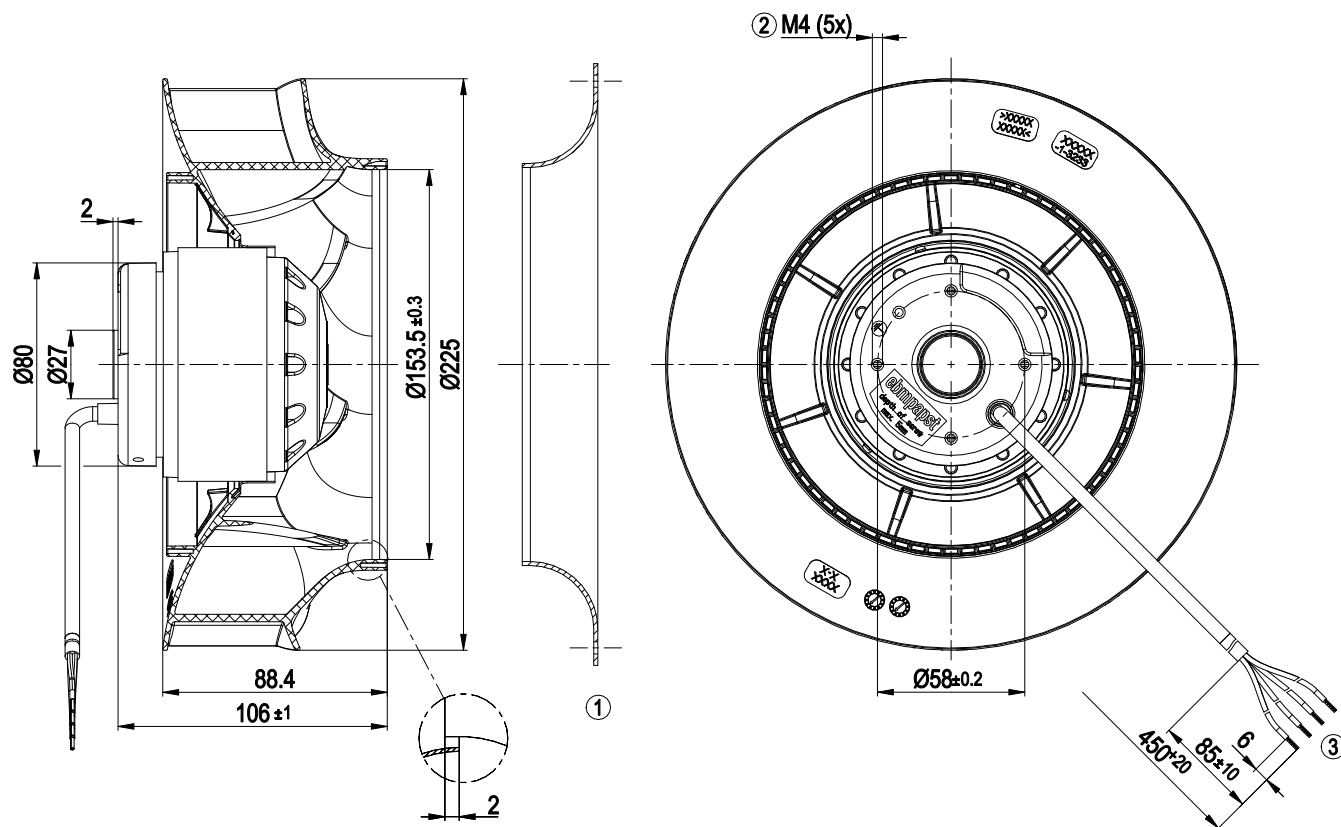


1	Accessory part: inlet ring 96358-2-4013 not included in scope of delivery
2	Max. clearance for screw 5 mm
3	Cable silicone 4G 0.5 mm ²
	4x splice

R2E225-RC66-04


AC centrifugal fan - RadiCal
backward-curved, single-intake

Accessory part

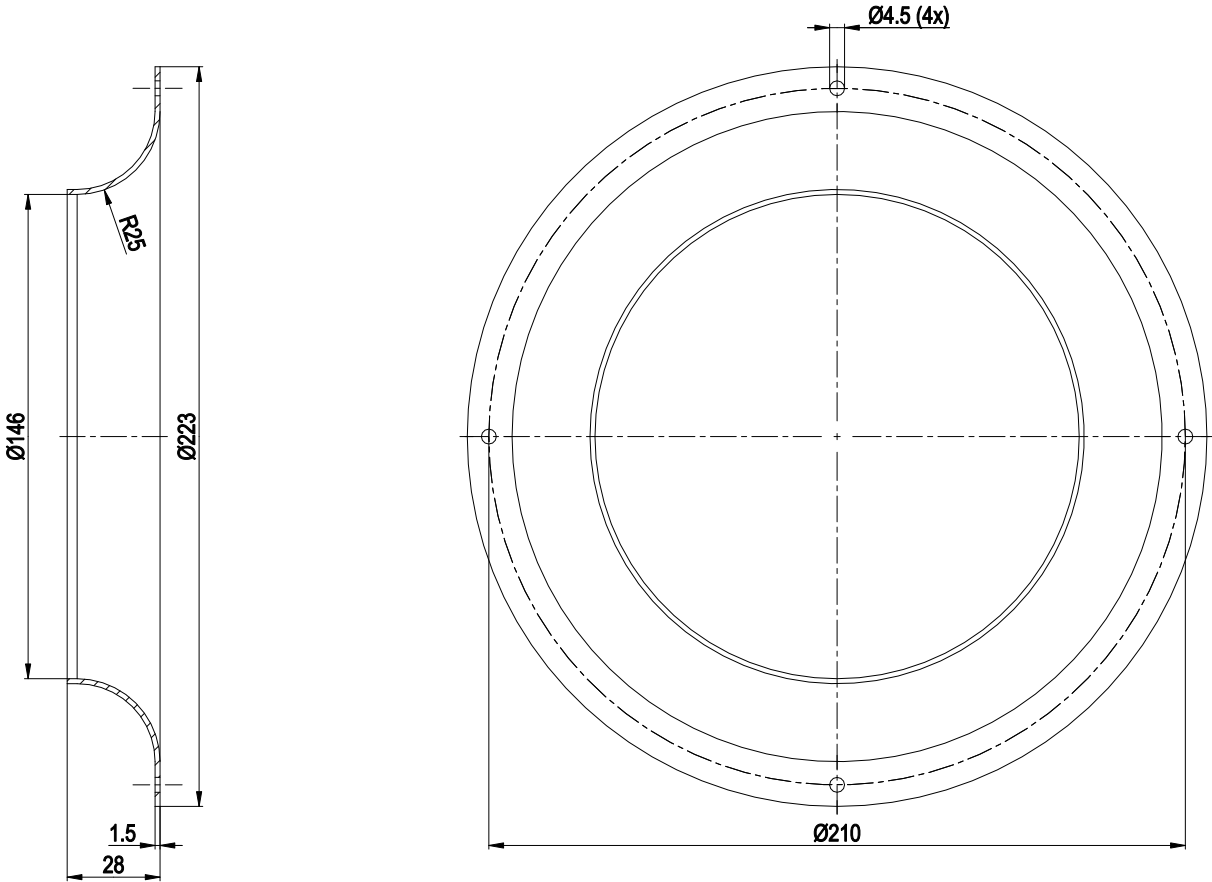

Inlet ring 96358-2-4013

Connection diagram



U1	blue	Z	brown	U2	black
PE	green/yellow				




R2E225-RC66-04

AC centrifugal fan - RadiCal

backward-curved, single-intake

Curves: Air performance 50 Hz

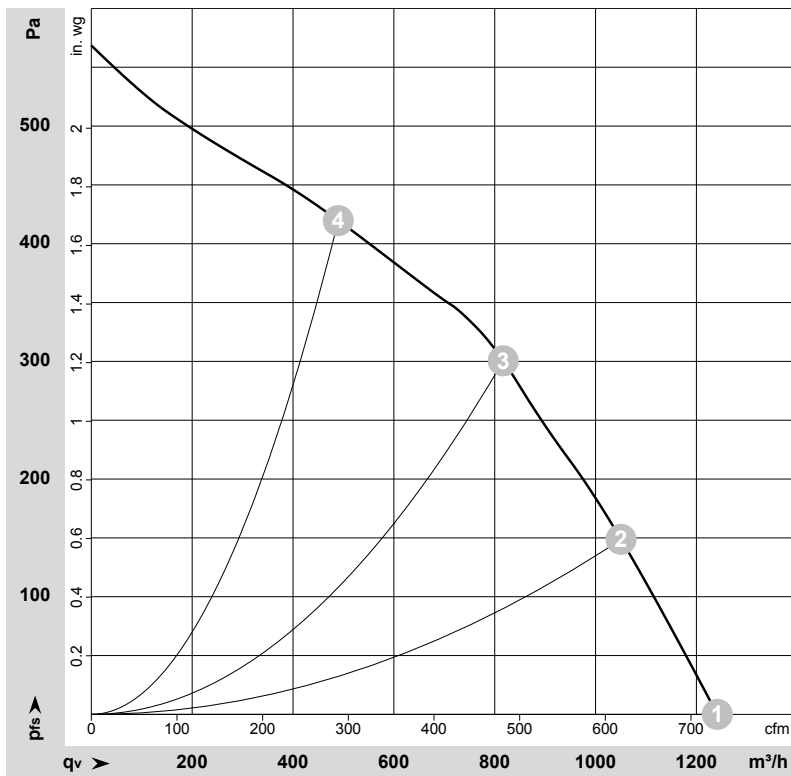
 $\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-189568-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	1~	230	50	2695	132	0.58	1240	0	730	0.00
2	1~	230	50	2615	150	0.66	1050	150	620	0.60
3	1~	230	50	2550	160	0.70	815	300	480	1.20
4	1~	230	50	2635	145	0.63	490	420	290	1.69


Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

R2E225-RC66-04

AC centrifugal fan - RadiCal

backward-curved, single-intake

Curves: Air performance 60 Hz

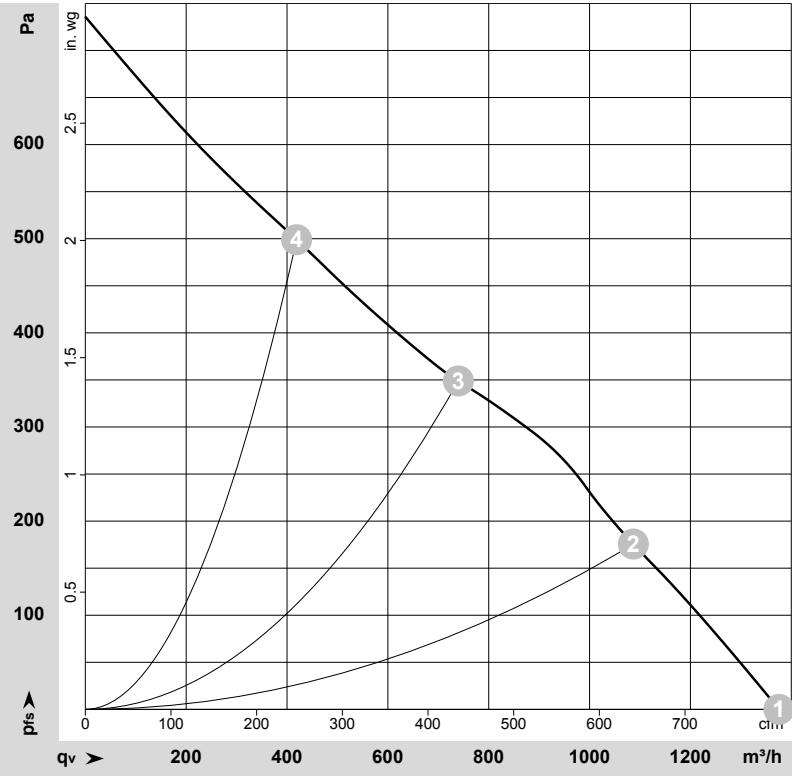

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-203619-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	1~	230	60	2985	189	0.85	1375	0	810	0.00
2	1~	230	60	2745	214	0.95	1085	175	640	0.70
3	1~	230	60	2650	220	1.00	740	350	435	1.41
4	1~	230	60	2860	198	0.88	420	500	245	2.01

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

