

KARTA KATALOGOWA

R2E250-RB06-01

Wentylator promieniowy AC RadiCal, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst




Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Wielkość	250 mm
Częstotliwość	50 / 60 Hz	Silnik	M2E074-EI
Prędkość obrotowa	2750 / 3100 obr/min	Materiał wirnika	tworzywo PA
Pobór mocy	250 / 390 W	Liczba łopatek	7
Pobór prądu	1,1 / 1,71 A	Kierunek obrotów	w prawo, patrząc na wirnik
Prąd rozruchowy	3,15 / 3,0 A	Stopień ochrony	IP44
Kondensator	5 µF / 450 V	Klasa izolacji	F
Maks. wydajność	1450 m³/h	Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Maks. ciśnienie statyczne	735 Pa	Łożyskowanie	kulkowe
Temperatura otoczenia	min. -25 °C; maks. 70 / 55 °C	Masa	4 kg

Dane ErP (UE 327/2011)	
Sprawność całkowita	45 %
Przepływ w pkt. optymalnym	900 m³/h
Przyrost ciśnienia	439 Pa
Regulacja prędkości (ErP)	nie

Charakterystyka przepływowa (50 Hz)

Charts: Air flow 50 Hz

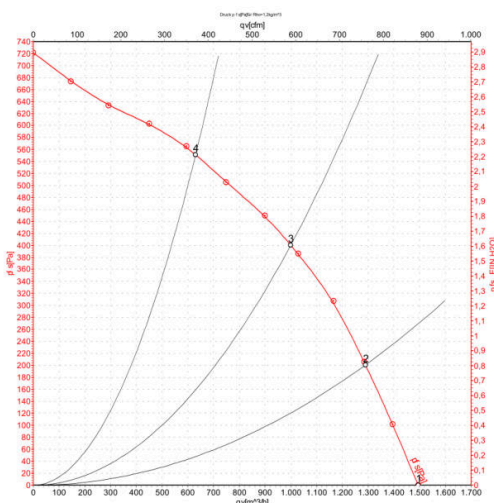

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R2E250-RB06-01

AC centrifugal fan - RadiCal®

backward curved, single inlet


ebm-papst Muldingen GmbH & Co. KG

Bachmühle 2 · D-74673 Muldingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com



Nominal data

Type	R2E250-RB06-01		
Motor	M2E074-EI		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Type of data definition		ml	ml
Valid for approval / standard		CE	CE
Speed	min ⁻¹	2750	3100
Power input	W	250	390
Current draw	A	1.1	1.71
Motor capacitor	µF	5	5
Capacitor voltage	VDB	450	450
Capacitor standard		P0 (CE)	P0 (CE)
Min. back pressure	Pa	0	0
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	70	55
Starting current	A	3.15	3.0

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio*	1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}	%	45	41	45
Efficiency grade N		62	58	62
Power input P_e	kW	0.24		
Air flow q_v	m ³ /h	900		
Pressure increase p_{fs}	Pa	439		
Speed n	min ⁻¹	2775		

Data definition with optimum efficiency. LU-130850
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



R2E250-RB06-01

AC centrifugal fan - RadiCal®

backward curved, single inlet

Technical features


Mass	4 kg
Size	250 mm
Surface of rotor	Coated in black
Material of impeller	PA plastic
Number of blades	7
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"F"
Humidity class	F1-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE
Approval	CCC; EAC

R2E250-RB06-01

AC centrifugal fan - RadiCal®


backward curved, single inlet

Product drawing

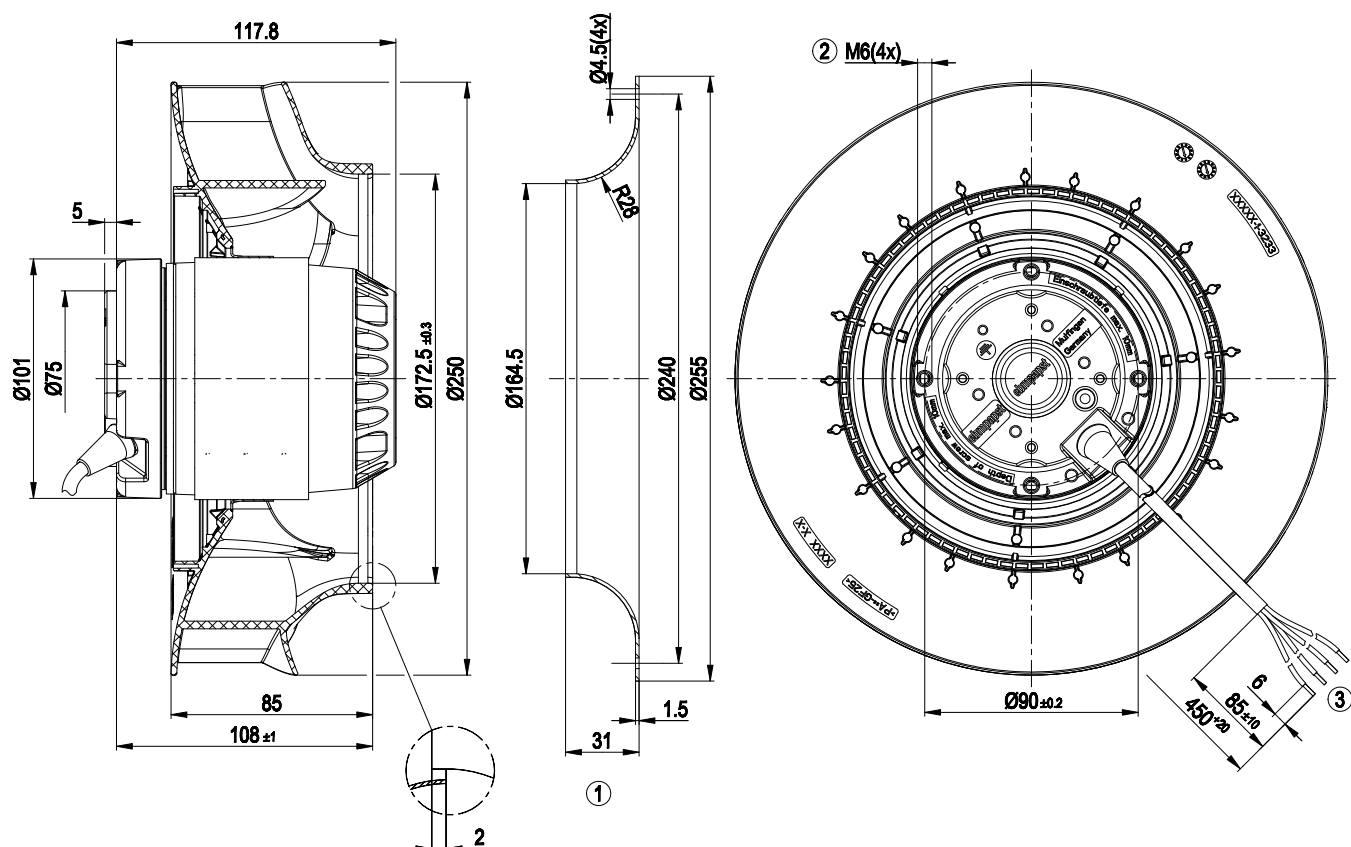

- | | |
|---|---|
| 1 | Accessory part: Inlet nozzle 96359-2-4013, not included in the standard scope of delivery |
| 2 | Depth of screw max. 10 mm |
| 3 | Connection line silicone 4G 0.5 mm², 4x brass lead tips crimped |

Connection screen




U1	blue	Z	brown	U2	black
PE	green/yellow				

R2E250-RB06-01

AC centrifugal fan - RadiCal®
 backward curved, single inlet

Charts: Air flow 50 Hz

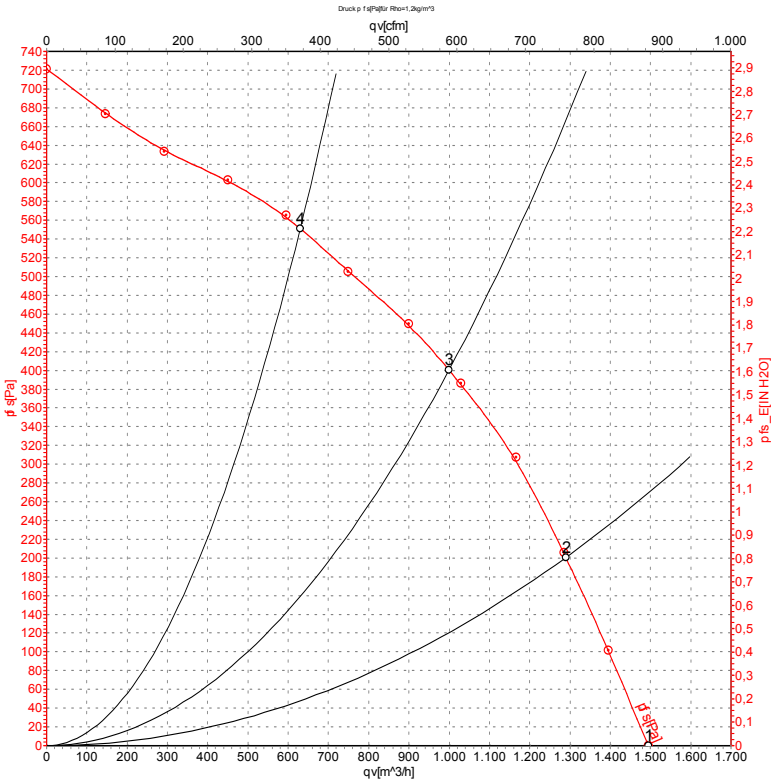

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	qv	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa
1	230	50	2800	215	0.95	69	78	1495	0
2	230	50	2790	237	1.03	65	74	1290	200
3	230	50	2750	250	1.10	62	71	1000	400
4	230	50	2800	227	0.99	66	74	630	550


U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · qv = Air flow
 P_{fs} = Pressure increase



R2E250-RB06-01

AC centrifugal fan - RadiCal®
 backward curved, single inlet

Charts: Air flow 60 Hz

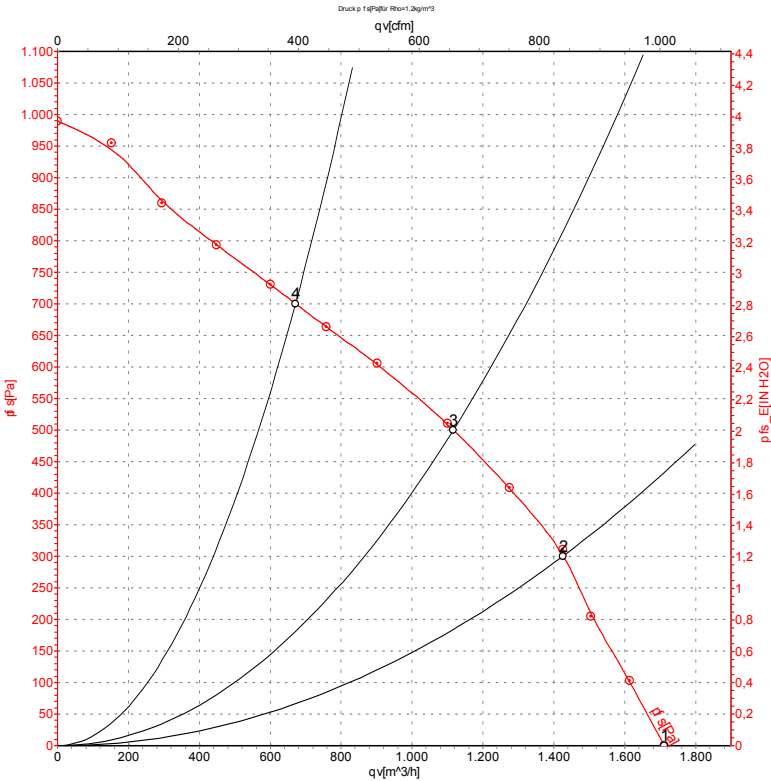

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	qv	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa
1	230	60	3200	345	1.51	73	81	1710	0
2	230	60	3155	364	1.59	67	76	1425	300
3	230	60	3100	390	1.71	65	73	1115	500
4	230	60	3150	365	1.59	70	80	670	700

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · qv = Air flow
 P_{fs} = Pressure increase

