

KARTA KATALOGOWA

R2E280-AF07-09

Wentylator promieniowy AC, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst




Zdjęcie poglądowe

Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Średnica wirnika	280 mm
Częstotliwość	50 Hz	Materiał wirnika	stal ocynkowana
Prędkość obrotowa	2720 obr/min	Liczba łopatek	11
Pobór mocy	420 W	Stopień ochrony	IP44
Pobór prądu	1,83 A	Klasa izolacji	F
Kondensator	16 µF / 400 V	Zabezpieczenie silnika	termik (TOP) wyprowadzony
Maks. wydajność	2520 m³/h	Masa	5,4 kg
Maks. ciśnienie statyczne	650 Pa		
Maks. temp. otoczenia	+40 °C		

Charakterystyka przepływowa

Charts: Air flow 50 Hz

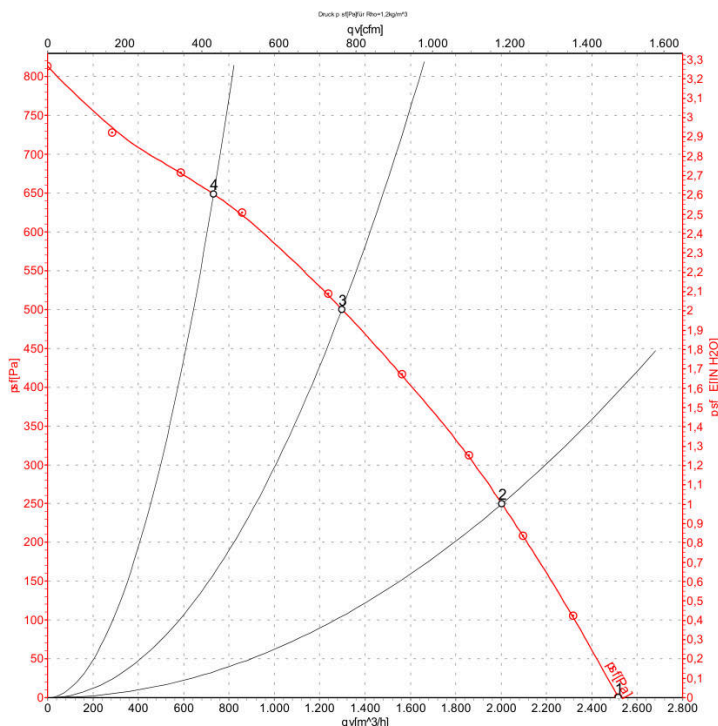

Measurement: LU-59158

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).
Wartości dla 50 Hz / 60 Hz; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R2E280-AF07-09

AC centrifugal fan

backward curved, single inlet

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

County court Stuttgart · HRA 590344

General partner: Elektrobau Mulfingen GmbH · Headquarters Mulfingen

County court Stuttgart · HRB 590142

Nominal data

Type	R2E280-AF07-09	
Motor	M2E074-GA	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Type of data definition		fa
Valid for approval / standard		CE
Speed	min ⁻¹	2720
Power input	W	420
Current draw	A	1.83
Motor capacitor	µF	16
Capacitor voltage	VDB	400
Capacitor standard		P2 (CE)
Min. back pressure	Pa	0
Max. ambient temperature	°C	40

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



R2E280-AF07-09

AC centrifugal fan

backward curved, single inlet

Technical features


Mass	5.4 kg
Size	280 mm
Surface of rotor	Coated in black
Material of impeller	Sheet steel, hot-galvanised
Number of blades	11
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"F"
Humidity class	F1-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Leakage current	< 0.75 mA
Motor protection	Thermal overload protector (TOP) brought out
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE

R2E280-AF07-09

AC centrifugal fan

backward curved, single inlet

Product drawing

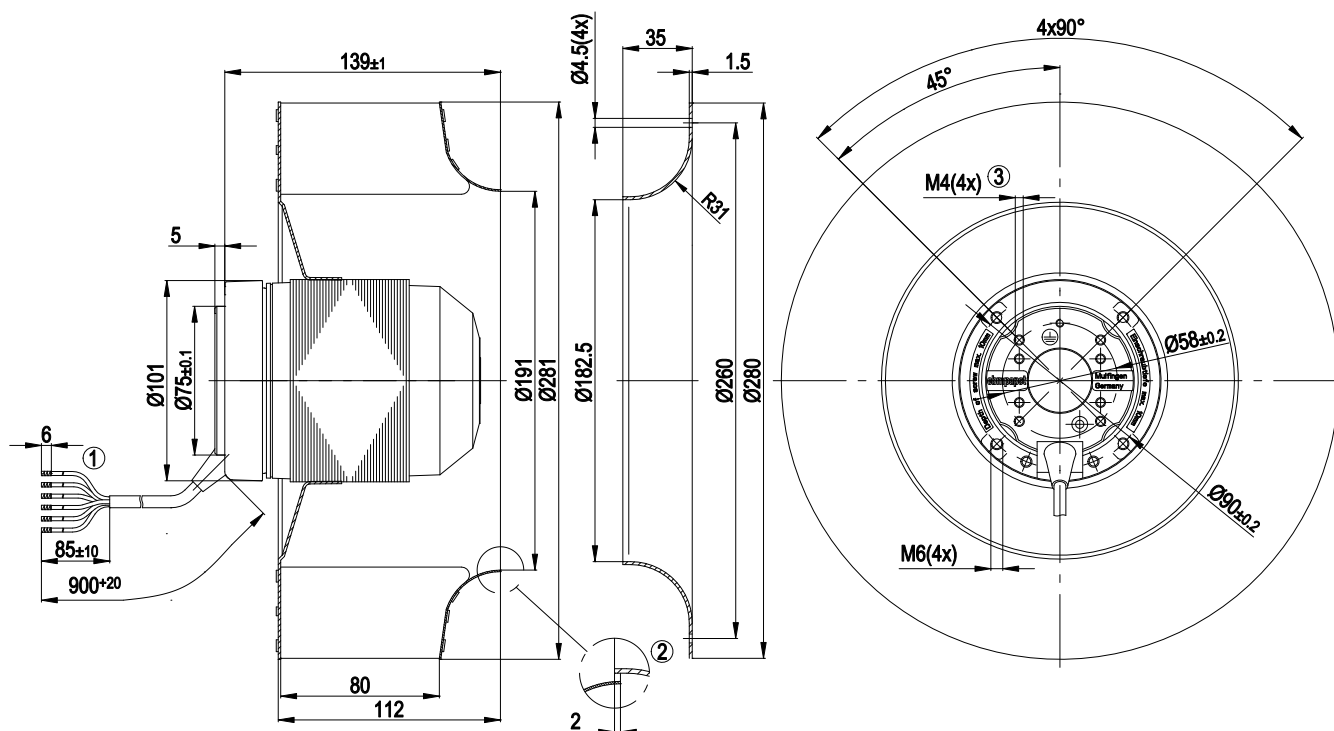


- | | |
|---|---|
| 1 | Connection line silicone 4 x 0.5 mm ² , 4 x brass lead tips crimped |
| 2 | Accessory part: Inlet nozzle 96360-2-4013, not included in the standard scope of delivery |
| 3 | Depth of screw max. 6 mm |

R2E280-AF07-09

AC centrifugal fan
backward curved, single inlet

Connection screen

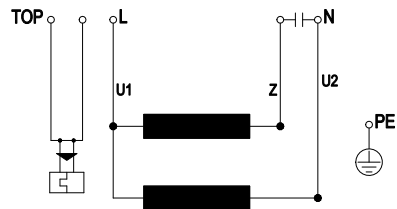

Note: TOP brought out


TOP	2 x grey	U1	blue	Z	brown
U2	black	PE	green / yellow		

R2E280-AF07-09

AC centrifugal fan

backward curved, single inlet

Charts: Air flow 50 Hz

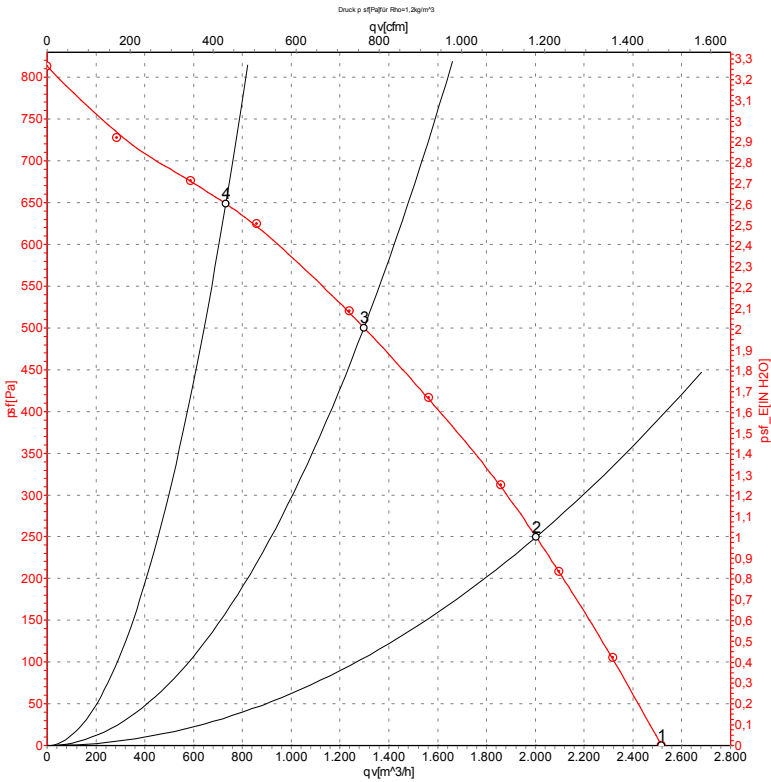

Measurement: LU-59158

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _e	I	qv	p _{sf}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	50	2720	420	1.83	2520	0
2	230	50	2625	502	2.18	2005	250
3	230	50	2610	511	2.22	1300	500
4	230	50	2700	435	1.90	730	650

