

KARTA KATALOGOWA

R3G133-RA01-03

Wentylator promieniowy EC RadiCal, łopatki zakrzywione do tyłu, jednostronnie ssący


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V (200...240 V)	Wielkość	133 mm
Częstotliwość	50/60 Hz	Silnik	M3G045-AI
Prędkość obrotowa	3770 obr/min	Materiał wirnika	tworzywo PP
Pobór mocy	27 W	Obudowa elektroniki	odlew aluminiowy
Pobór prądu	0,27 A	Liczba łopatek	7
Maks. wydajność	280 m³/h	Kierunek obrotów	w prawo, patrząc na wirnik
Maks. ciśnienie statyczne	420 Pa	Stopień ochrony	IP54
Temperatura otoczenia	-25...+60 °C	Klasa izolacji	B
Regulacja obrotów	0-10 V / PWM	Zabezpieczenie silnika	elektroniczne
		Łożyskowanie	kulkowe
		Masa	0,5 kg

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

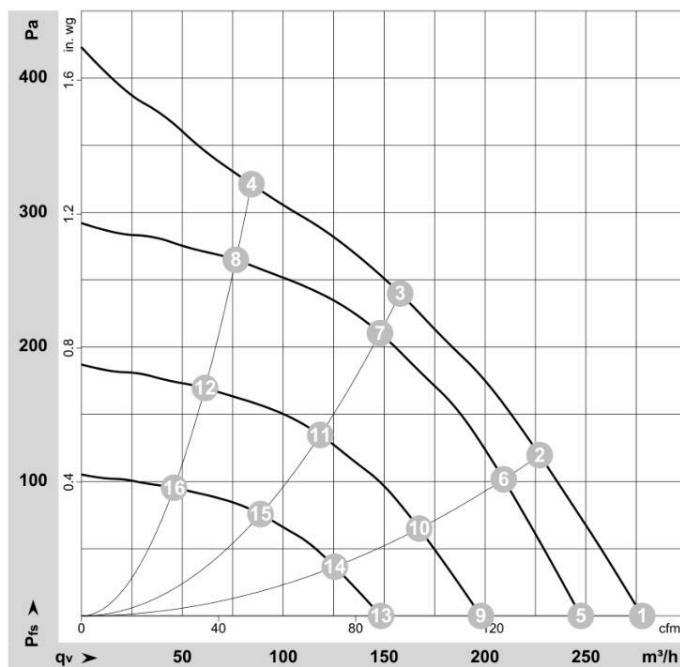

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-131806-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R3G133-RA01-03

EC centrifugal fan - RadiCal
backward-curved, single-intake



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	R3G133-RA01-03	
Motor	M3G045-AI	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	3770
Power consumption	W	27
Current draw	A	0.27
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



R3G133-RA01-03

EC centrifugal fan - RadiCal

backward-curved, single-intake

Technical description


Weight	0.5 kg
Size	133 mm
Motor size	45
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from supply - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; CCC; EAC; UL 1004-7 + 60730-1; VDE

R3G133-RA01-03

EC centrifugal fan - RadiCal

backward-curved, single-intake

Product drawing

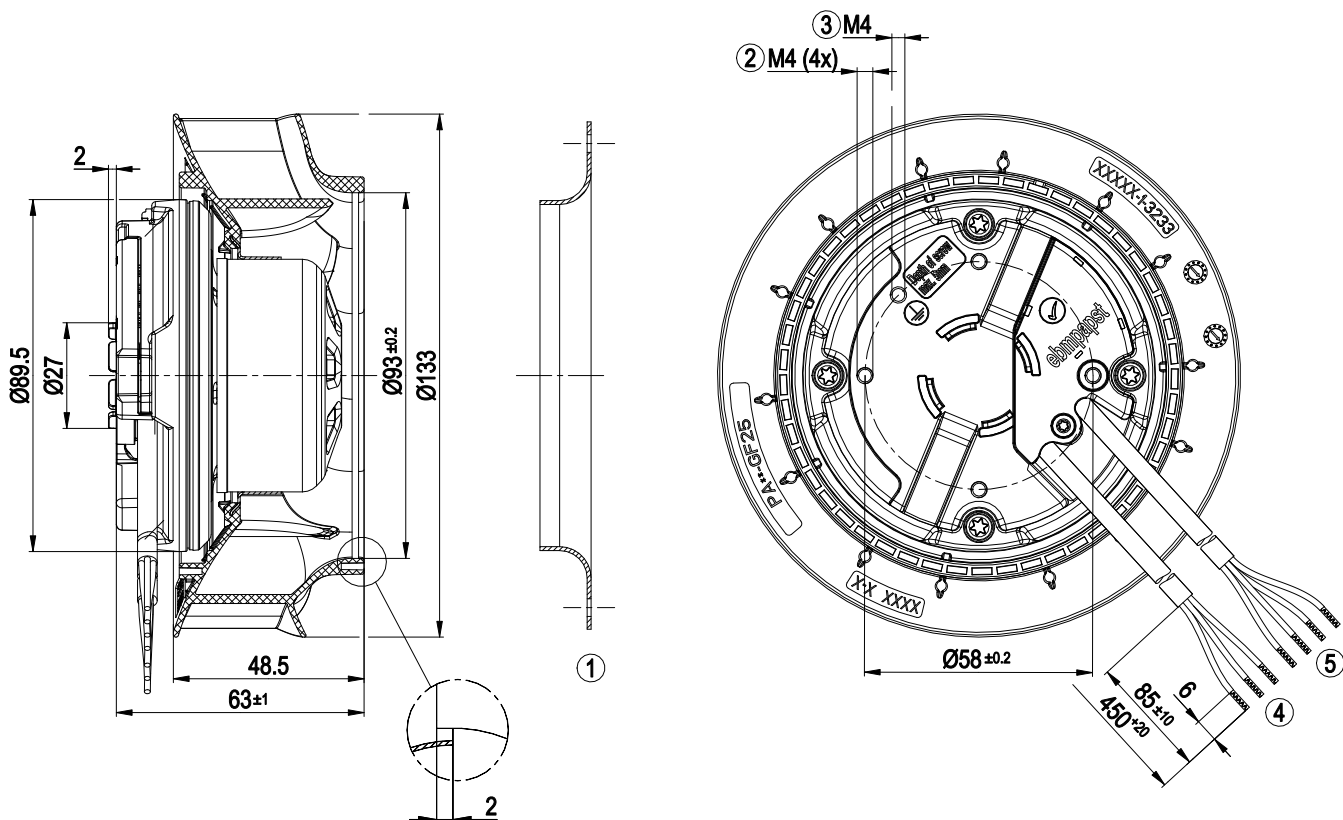


1	Accessory part: inlet ring 09566-2-4013, not included in scope of delivery
2	Max. clearance for screw 5 mm
3	Max. clearance for screw 5 mm
4	Cable PVC AWG20, 3x crimped splices
5	Cable PVC AWG22, 4x crimped splices

R3G133-RA01-03

EC centrifugal fan - RadiCal

backward-curved, single-intake

Accessory part

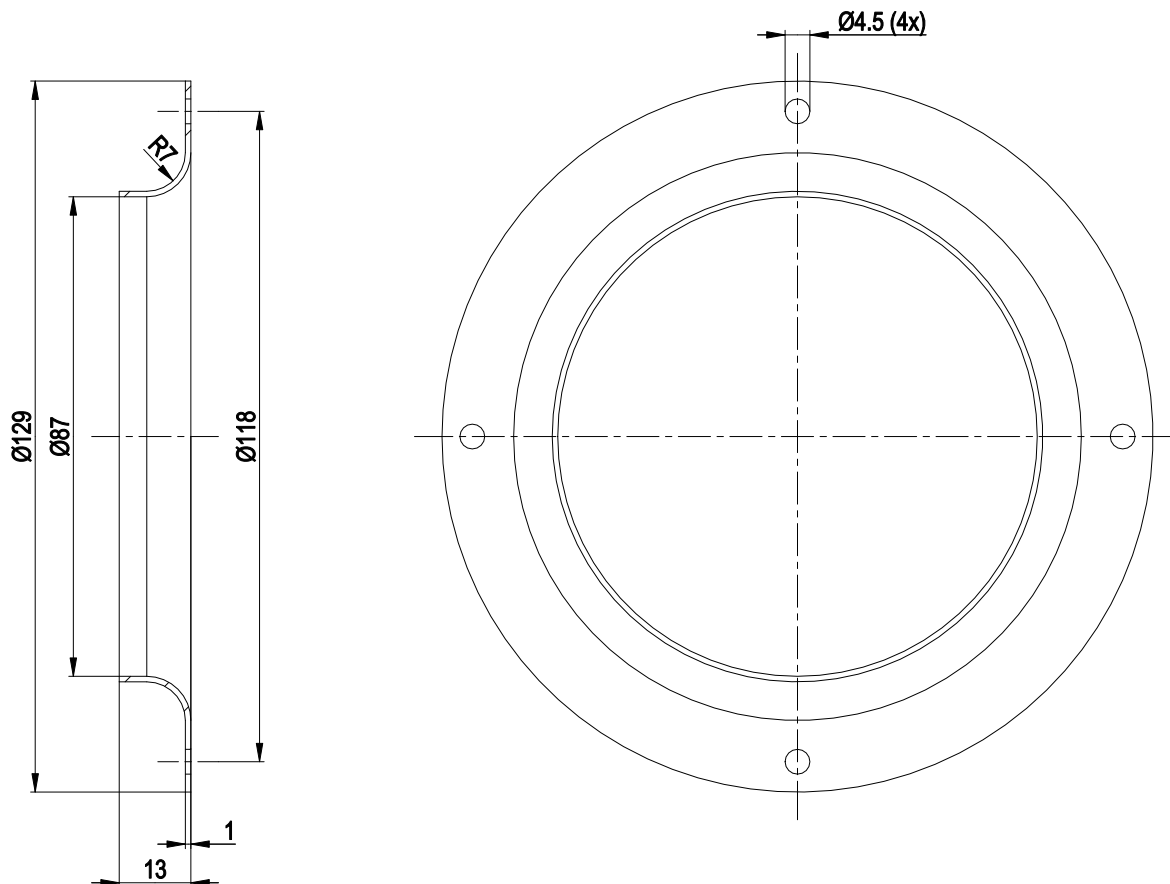


1 Accessory part: inlet ring 09566-2-4013 not included in scope of delivery

R3G133-RA01-03

EC centrifugal fan - RadiCal
 backward-curved, single-intake

Connection diagram

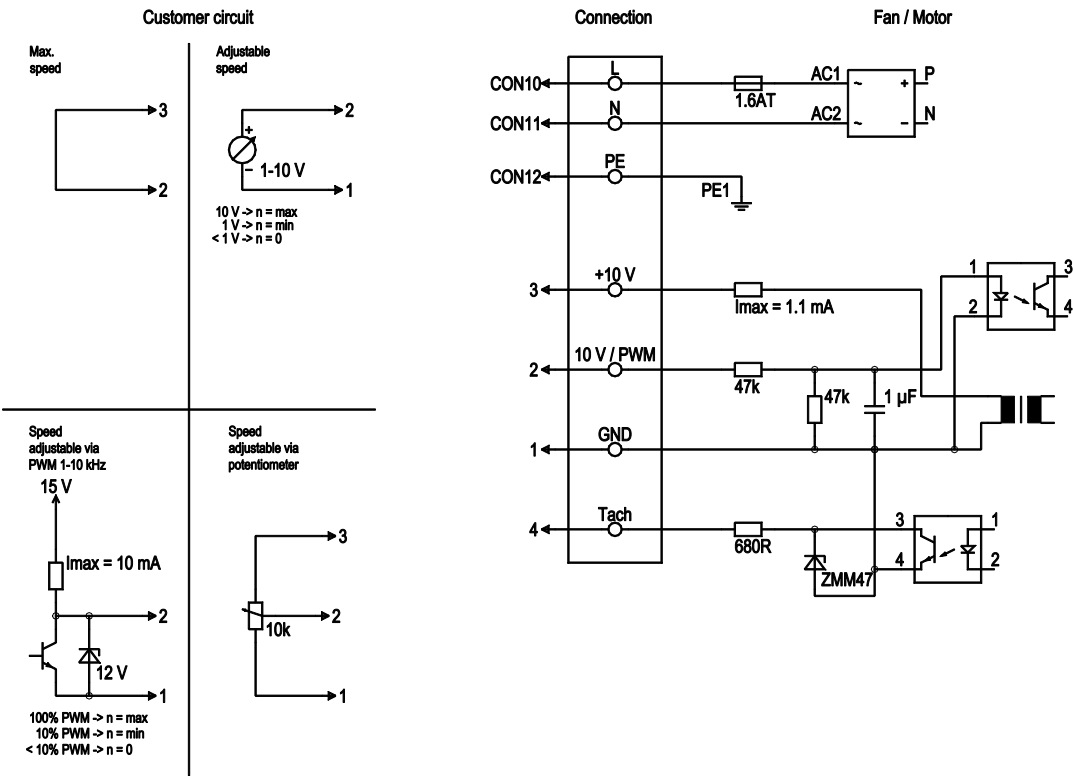

No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
	CON11	N	blue	Neutral conductor
	CON12	PE	green/yellow	Protective earth
	1	GND	blue	GND connection for control interface
	2	0- 10V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
	3	10V/ max 1.1mA	red	Voltage output 10 V / 1.1 mA, electrically isolated, not short-circuit-proof.
	4	Tach	white	Tach output: open collector, 1 pulse per revolution, electrically isolated




R3G133-RA01-03

EC centrifugal fan - RadiCal

backward-curved, single-intake

Curves: Air performance 50 Hz

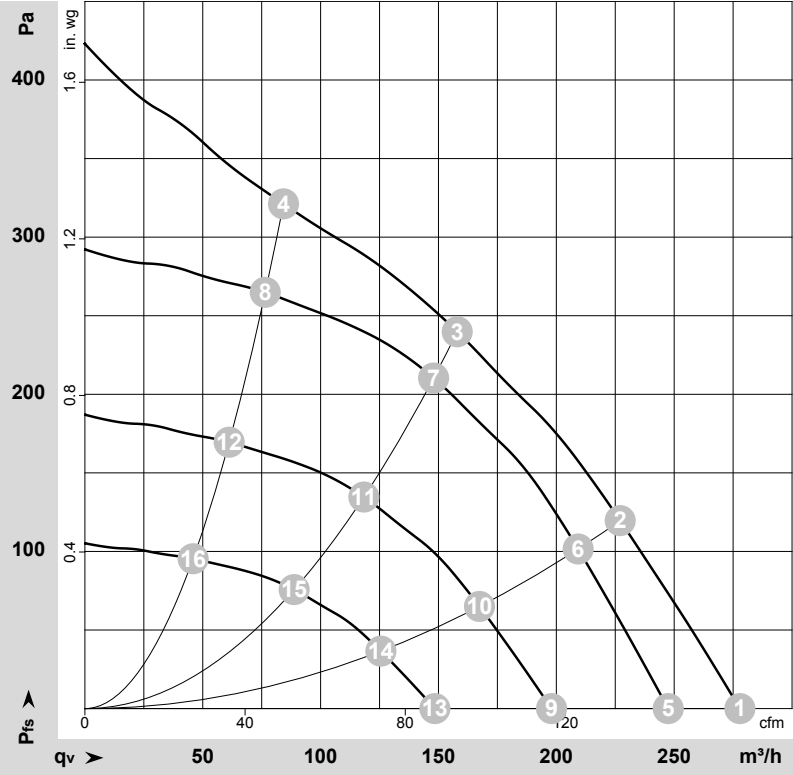

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-131806-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	230	50	3930	24	0.23	58	66	280	0	165	0.00
2	230	50	3800	26	0.26	54	63	225	120	135	0.48
3	230	50	3770	27	0.27	52	61	160	240	95	0.96
4	230	50	3850	25	0.25	56	66	85	320	50	1.28
5	230	50	3500	17	0.16	55	64	245	0	145	0.00
6	230	50	3500	20	0.20	52	61	210	102	125	0.41
7	230	50	3500	22	0.22	50	59	150	211	85	0.85
8	230	50	3500	19	0.18	54	64	75	265	45	1.06
9	230	50	2800	9.0	0.08	49	58	200	0	115	0.00
10	230	50	2800	10.0	0.10	47	56	165	65	100	0.26
11	230	50	2800	11	0.11	45	54	120	135	70	0.54
12	230	50	2800	10.0	0.09	48	58	60	170	35	0.68
13	230	50	2100	4.0	0.03	42	51	150	0	85	0.00
14	230	50	2100	4.0	0.04	39	48	125	37	75	0.15
15	230	50	2100	5.0	0.05	37	46	90	76	50	0.31
16	230	50	2100	4.0	0.04	41	51	45	95	25	0.38

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

