

KARTA KATALOGOWA

R3G190-RB01-06

Wentylator promieniowy EC RadiCal, łopatki zakrzywione do tyłu, jednostronnie ssący


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V (200...240 V)	Wielkość	190 mm
Częstotliwość	50/60 Hz	Silnik	M3G055-BD
Prędkość obrotowa	2490 obr/min	Materiał wirnika	tworzywo PA
Pobór mocy	44 W	Liczba łopatek	7
Pobór prądu	0,43 A	Kierunek obrotów	w prawo, patrząc na wirnik
Maks. wydajność	585 m³/h	Stopień ochrony	IP54
Maks. ciśnienie statyczne	365 Pa	Klasa izolacji	B
Temperatura otoczenia	-25...+60 °C	Zabezpieczenie silnika	ochrona przed zablokowaniem wirnika
		Łożyskowanie	kulkowe
		Podłączenie	listwa zaciskowa (STK)
		Masa	0,94 kg

Charakterystyka przepływowa (50 Hz)

Charts: Air flow 50 Hz

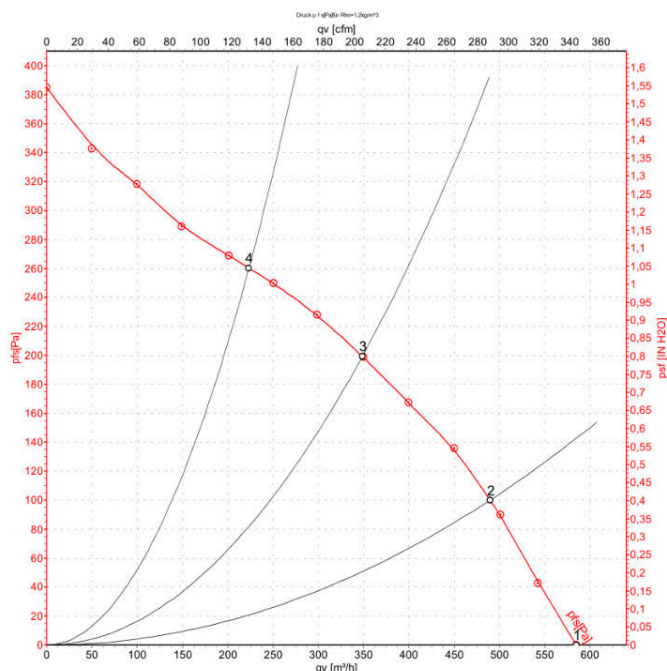

Measurement: LU-128838

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R3G190-RB01-06

EC centrifugal fan - RadiCal®

backward curved, single inlet



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	R3G190-RB01-06	
Motor	M3G055-BD	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Type of data definition		ml
Speed	min ⁻¹	2490
Power input	W	44
Current draw	A	0.43
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



R3G190-RB01-06

EC centrifugal fan - RadiCal®

backward curved, single inlet

Technical features


Mass	0.94 kg
Size	190 mm
Surface of rotor	Thick layer passivated
Material of impeller	PA plastic
Number of blades	7
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None, open rotor
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Motor current limit - Soft start - Over-temperature protected electronics / motor
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	STK
Motor protection	Locked-rotor protection
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE
Approval	CCC; CSA C22.2 Nr.77; UL 2111

R3G190-RB01-06

EC centrifugal fan - RadiCal®

backward curved, single inlet

Product drawing

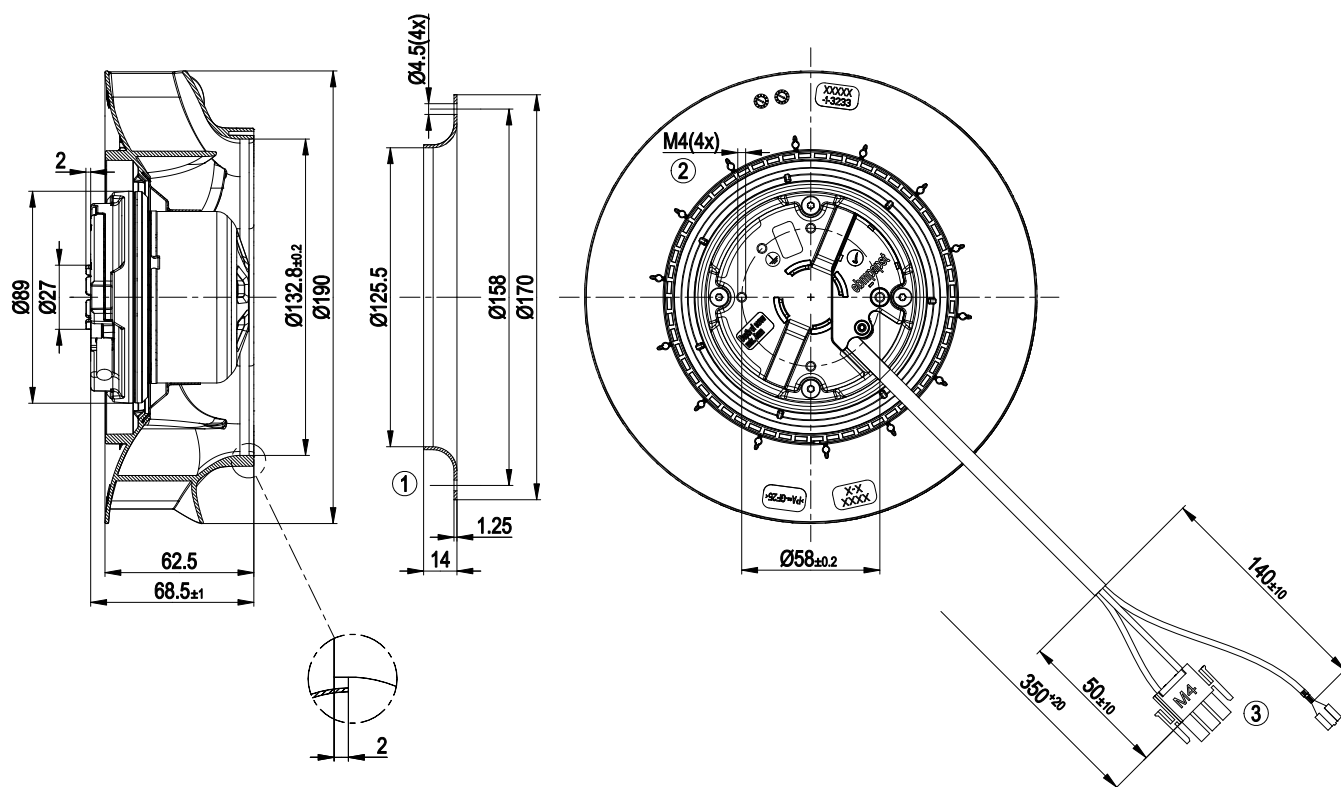


- | | |
|---|---|
| 1 | Accessory part: Inlet nozzle 09576-2-4013, not included in the standard scope of delivery |
| 2 | Depth of screw max. 5 mm |
| 3 | Connection line PVC 3X AWG20, connector housing AMP350766-4 with 2x plug pin AMP 926885-1 and 1x receptacle for tabs AMP 927852-6 |

R3G190-RB01-06

EC centrifugal fan - RadiCal®
backward curved, single inlet

Connection screen

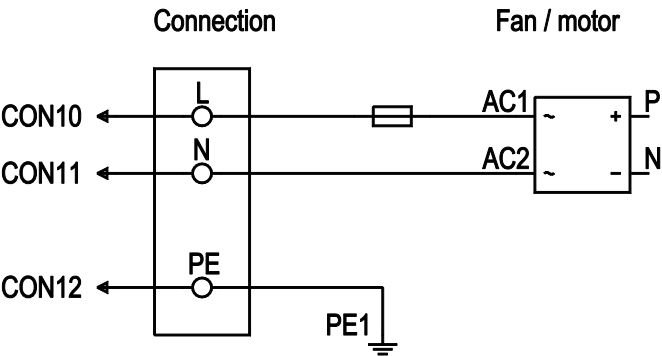


No.	Conn.	Designation	Colour	Function / assignment
	CON 10	L	black	Power supply 230 VAC, 50 - 60 Hz, for voltage range refer to rating plate
	CON 11	N	Blue	Neutral conductor
	CON 12	PE	green/yellow	Protective earth



R3G190-RB01-06

EC centrifugal fan - RadiCal®
 backward curved, single inlet

Charts: Air flow 50 Hz

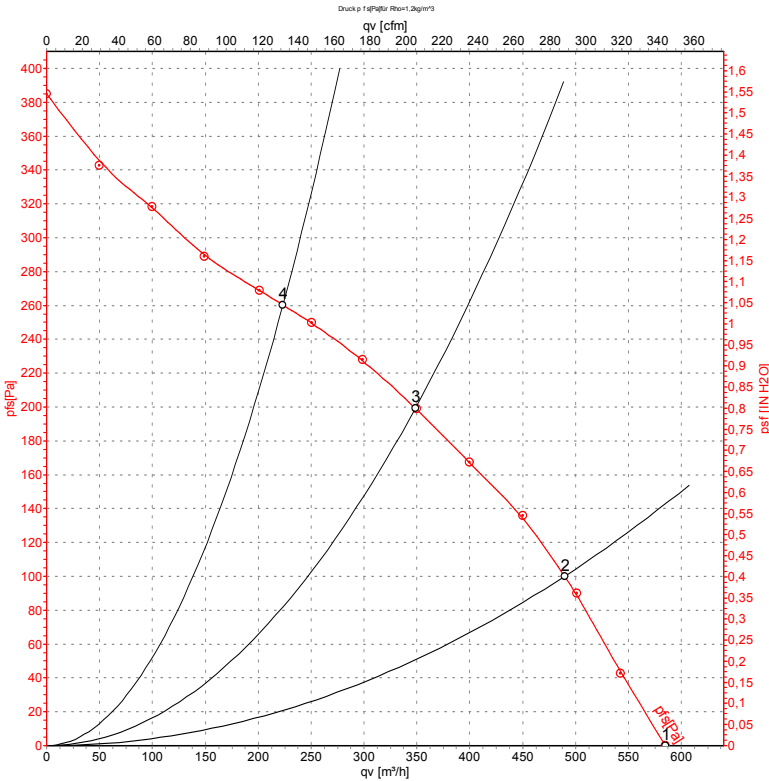

Measurement: LU-128838

Air performance measured as per ISO 5801
 Installation category A. For detailed
 information on the measuring set-up, please
 contact ebm-papst. Suction-side noise
 levels: LwA measured as per ISO 13347 /
 LpA measured with 1m distance to fan axis.
 The values given are valid under the
 measuring conditions mentioned above and
 may vary according to the actual installation
 situation. With any deviation from the
 standard set-up, the specific values have to
 be checked and reviewed with the unit
 installed.

Measured values

	U	f	n	P _{ed}	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	50	2635	37	0.37	585	0
2	230	50	2565	40	0.41	490	100
3	230	50	2490	44	0.43	350	200
4	230	50	2540	42	0.41	225	260

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

