

## KARTA KATALOGOWA

# R3G190-RG19-41

Wentylator promieniowy EC RadiCal, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst




Zdjęcie poglądowe

| Dane znamionowe           |                        | Budowa           |             |
|---------------------------|------------------------|------------------|-------------|
| Napięcie znamionowe       | 1~ 230 V (200...240 V) | Średnica wirnika | 190 mm      |
| Częstotliwość             | 50/60 Hz               | Materiał wirnika | tworzywo PP |
| Prędkość obrotowa         | 3374 obr/min           | Liczba łopatek   | 7           |
| Pobór mocy                | 96 W                   | Stopień ochrony  | IP54        |
| Pobór prądu               | 0,8 A                  | Klasa izolacji   | B           |
| Maks. wydajność           | 755 m³/h               | Masa             | 1,32 kg     |
| Maks. ciśnienie statyczne | 450 Pa                 |                  |             |
| Temperatura otoczenia     | -25...+60 °C           |                  |             |

## Charakterystyka przepływowa

### Curves: Air performance 50 Hz

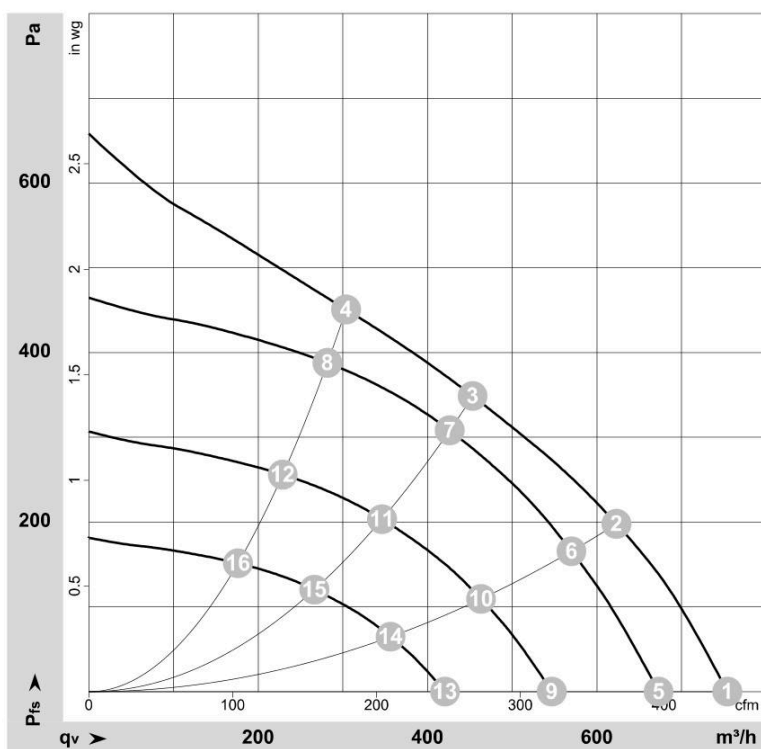

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-170599-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).

Wartości znamionowe dla punktu maksymalnego obciążenia; producent zastrzega możliwość zmian.

## Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199  
biuro@luftberg.pl · www.luftberg.pl

**R3G190-RG19-41**

# EC centrifugal fan - RadiCal

backward-curved, single-intake

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | R3G190-RG19-41    |            |
| Motor                    | M3G055-CF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 3374       |
| Power consumption        | W                 | 96         |
| Current draw             | A                 | 0.8        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



**R3G190-RG19-41**

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Technical description

|                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Weight</b>                                                                     | 1.32 kg                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Size</b>                                                                       | 190 mm                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Motor size</b>                                                                 | 55                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Rotor surface</b>                                                              | Thick-film passivated                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Electronics housing material</b>                                               | Die-cast aluminum                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Impeller material</b>                                                          | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Number of blades</b>                                                           | 7                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Direction of rotation</b>                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Degree of protection</b>                                                       | IP54                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Insulation class</b>                                                           | "B"                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Moisture (F) / Environmental (H) protection class</b>                          | H1+                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Max. permitted ambient temp. for motor (transport/storage)</b>                 | + 80 °C                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Min. permitted ambient temp. for motor (transport/storage)</b>                 | - 40 °C                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Installation position</b>                                                      | Any                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Condensation drainage holes</b>                                                | None, open rotor                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Mode</b>                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Motor bearing</b>                                                              | Ball bearing; (sealed)                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Technical features</b>                                                         | <ul style="list-style-type: none"> <li>- Tach output</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage detection</li> </ul> |
| <b>EMC immunity to interference</b>                                               | According to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                  |
| <b>EMC circuit feedback</b>                                                       | According to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>EMC interference emission</b>                                                  | According to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b> | <= 3,5 mA                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Electrical hookup</b>                                                          | Connector with cable                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Motor protection</b>                                                           | Electronic motor protection                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>With cable</b>                                                                 | Variable                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Protection class</b>                                                           | I (with customer connection of protective earth)                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Conformity with standards</b>                                                  | EN 60335-1; CE                                                                                                                                                                                                                                                                                                                                                                                                      |




**R3G190-RG19-41**

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Product drawing

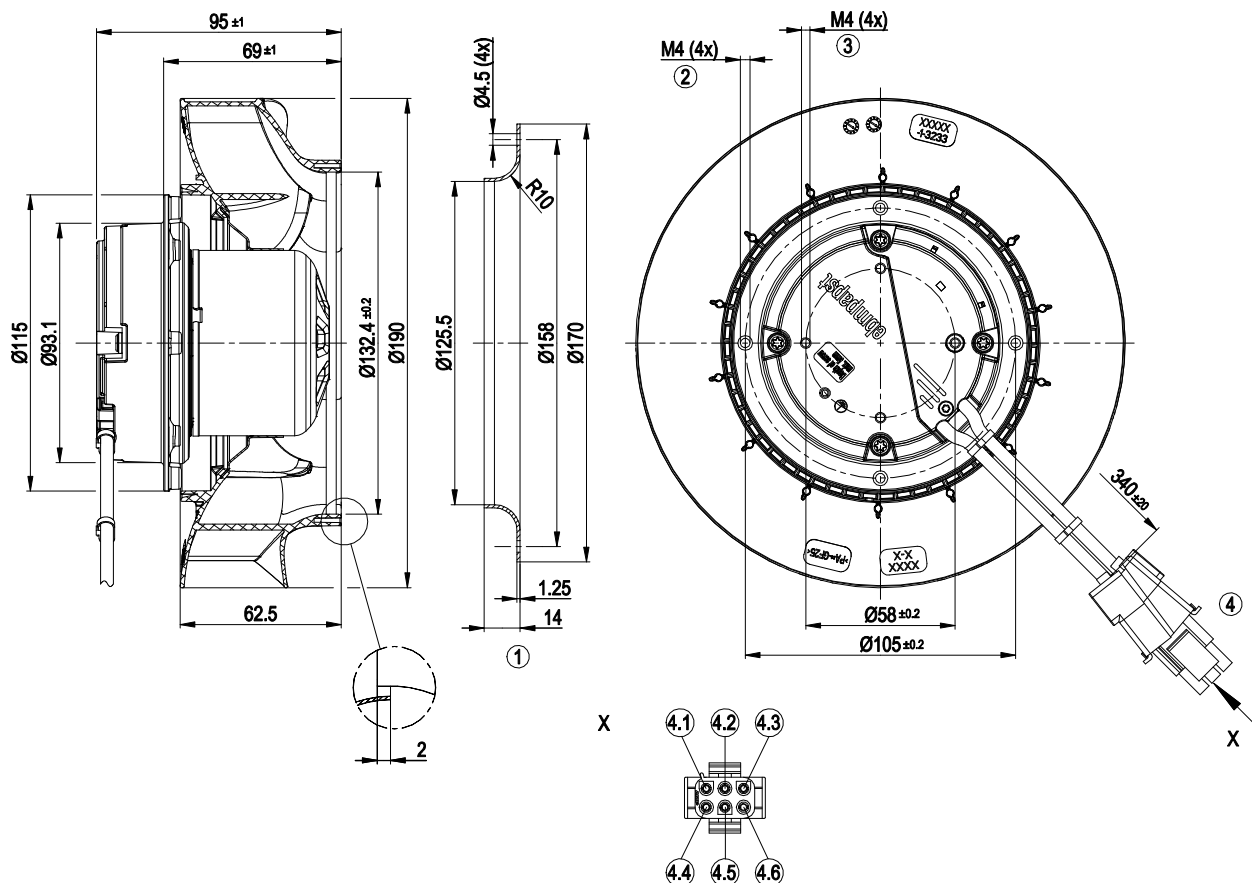


|     |                                                                                                                                                                                         |
|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Accessory part: Inlet ring: 09576-2-4013 not included in scope of delivery                                                                                                              |
| 2   | Max. clearance for screw 5 mm                                                                                                                                                           |
| 3   | Max. clearance for screw 5 mm                                                                                                                                                           |
| 4   | Cable PVC 3G 0.5 mm², cable PVC 3x 0.25 mm², connector housing 6-pole AMP 1586846-1, 2x strain relief AMP 1-640721-0, 1x plug pin AMP 350654-1 (green/yellow), 5x plug pin AMP 926885-1 |
| 4.1 | 0-10 V PWM (yellow)                                                                                                                                                                     |
| 4.2 | GND (blue)                                                                                                                                                                              |
| 4.3 | Tach (white)                                                                                                                                                                            |
| 4.4 | L (brown)                                                                                                                                                                               |
| 4.5 | N (blue)                                                                                                                                                                                |
| 4.6 | PE (green/yellow)                                                                                                                                                                       |

**R3G190-RG19-41**

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Connection diagram

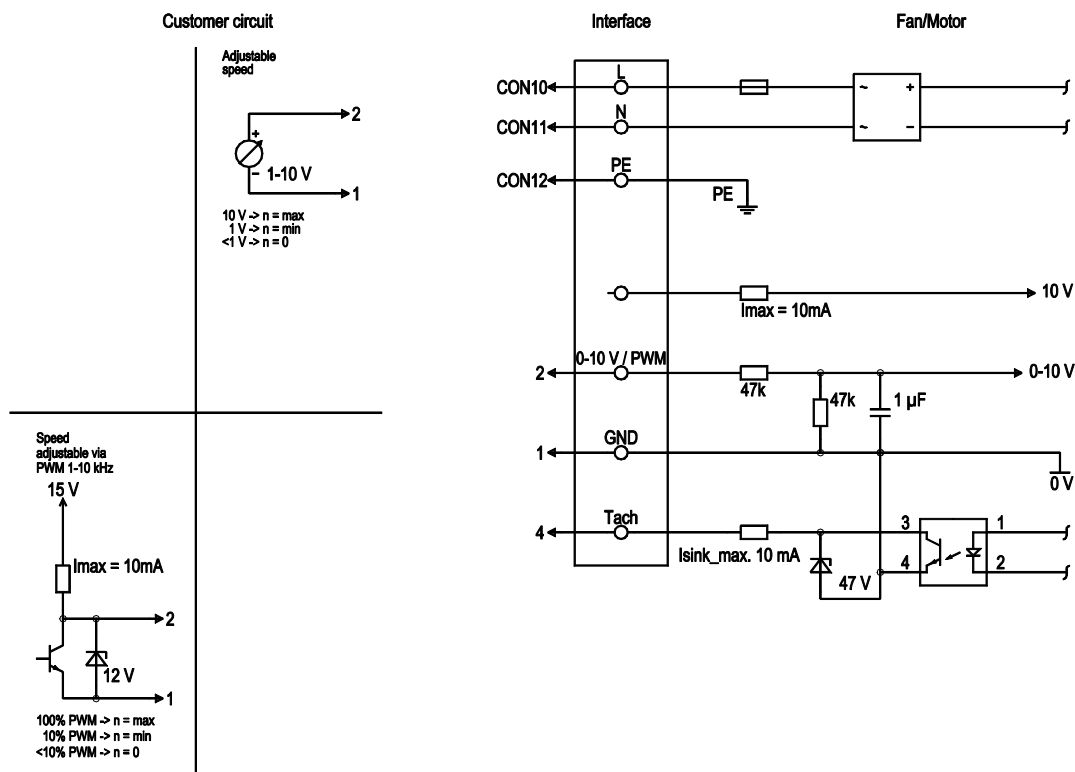


| No. | Conn. | Designation | Color        | Function/assignment                                                                 |
|-----|-------|-------------|--------------|-------------------------------------------------------------------------------------|
|     | CON10 | L           | brown        | Supply connection, power supply, phase, see nameplate for voltage range             |
|     | CON11 | N           | blue         | Supply connection, power supply, neutral conductor, see nameplate for voltage range |
|     | CON12 | PE          | green/yellow | Ground connection                                                                   |
|     | 2     | 0- 10V PWM  | yellow       | 0-10 V / PWM control input, Ri=100 kΩ, SELV                                         |
|     | 4     | Tach        | white        | Tach output, open collector, 1 pulse per revolution, Isink max = 10 mA, SELV        |
|     | 1     | GND         | blue         | Reference ground for control interface, SELV                                        |

R3G190-RG19-41

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Curves: Air performance 50 Hz

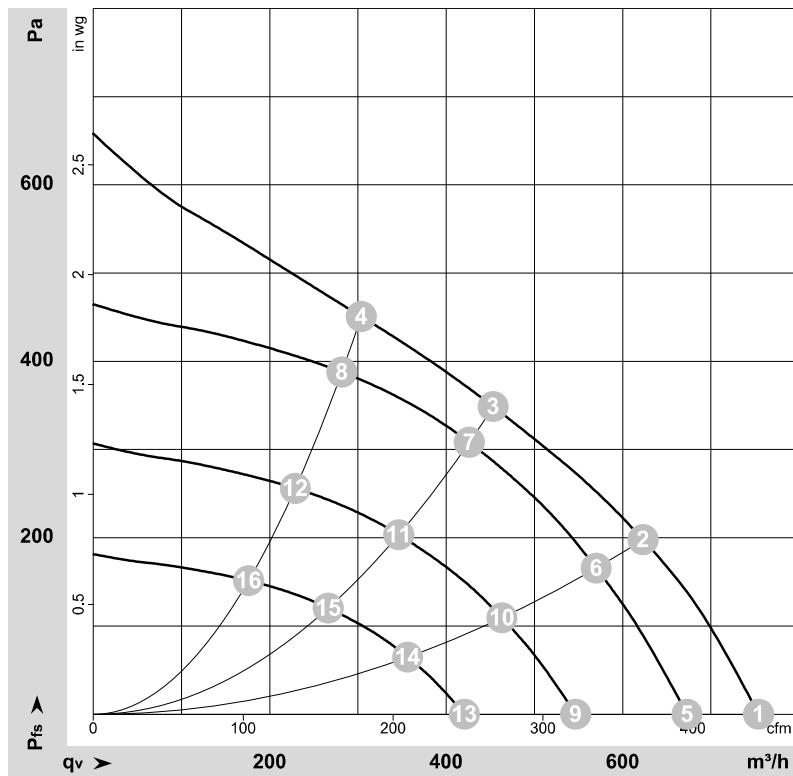

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-170599-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-----------------|----------------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1  | 230 | 50 | 3585              | 84              | 0.72 | 755               | 0               | 445            | 0.00            |
| 2  | 230 | 50 | 3500              | 90              | 0.77 | 625               | 200             | 365            | 0.80            |
| 3  | 230 | 50 | 3375              | 96              | 0.80 | 455               | 350             | 265            | 1.41            |
| 4  | 230 | 50 | 3450              | 93              | 0.80 | 305               | 450             | 180            | 1.81            |
| 5  | 230 | 50 | 3200              | 59              | 0.51 | 675               | 0               | 395            | 0.00            |
| 6  | 230 | 50 | 3200              | 68              | 0.59 | 570               | 166             | 335            | 0.67            |
| 7  | 230 | 50 | 3200              | 81              | 0.69 | 425               | 308             | 250            | 1.24            |
| 8  | 230 | 50 | 3200              | 75              | 0.64 | 280               | 388             | 165            | 1.56            |
| 9  | 230 | 50 | 2600              | 32              | 0.27 | 545               | 0               | 320            | 0.00            |
| 10 | 230 | 50 | 2600              | 37              | 0.31 | 465               | 110             | 275            | 0.44            |
| 11 | 230 | 50 | 2600              | 43              | 0.37 | 345               | 204             | 205            | 0.82            |
| 12 | 230 | 50 | 2600              | 40              | 0.34 | 230               | 256             | 135            | 1.03            |
| 13 | 230 | 50 | 2000              | 15              | 0.12 | 420               | 0               | 250            | 0.00            |
| 14 | 230 | 50 | 2000              | 17              | 0.14 | 355               | 65              | 210            | 0.26            |
| 15 | 230 | 50 | 2000              | 20              | 0.17 | 265               | 120             | 155            | 0.48            |
| 16 | 230 | 50 | 2000              | 18              | 0.16 | 175               | 152             | 105            | 0.61            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

