

KARTA KATALOGOWA

R3G225-RE07-25

Wentylator promieniowy EC, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst



Zdjęcie poglądowe

Dane znamionowe	
Napięcie znamionowe	1~ 230 V (200...240 V)
Częstotliwość	50/60 Hz
Prędkość obrotowa	2680 obr/min
Pobór mocy	135 W
Pobór prądu	1,15 A
Maks. wydajność	1100 m³/h
Maks. ciśnienie statyczne	475 Pa
Temperatura otoczenia	-25...+60 °C

Budowa	
Wielkość	225 mm
Silnik	M3G055-DF
Materiał wirnika	tworzywo PA
Liczba łopatek	7
Kierunek obrotów	w prawo, patrząc na wirnik
Stopień ochrony	IP54
Klasa izolacji	B
Zabezpieczenie silnika	elektroniczne
Łożyskowanie	kulkowe, uszczelnione
Podłączenie	złącze z przewodem
Masa	1,8 kg

Dane ErP (UE 327/2011)	
Sprawność całkowita	56,3 %
Przepływ w pkt. optymalnym	700 m³/h
Przyrost ciśnienia	349 Pa
Regulacja prędkości (ErP)	tak

Charakterystyka przepływowa (50 Hz)



Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
 Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
 biuro@luftberg.pl · www.luftberg.pl

R3G225-RE07-25
ABB Industry FI

EC centrifugal fan

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	R3G225-RE07-25	
Motor	M3G055-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2680
Power consumption	W	135
Current draw	A	1.15
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	56.3	42.5
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		75.8	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.13
09 Air flow q_v	m³/h	700
09 Pressure increase p_{fs}	Pa	349
10 Speed (rpm) n	min ⁻¹	2685
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$ LU-190901



R3G225-RE07-25

ABB Industry FI

EC centrifugal fan

backward-curved, single-intake

Technical description

Weight	1.8 kg
Size	225 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Motor current limitation - Soft start - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Connector with cable
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1


R3G225-RE07-25

ABB Industry FI

EC centrifugal fan

backward-curved, single-intake

Product drawing

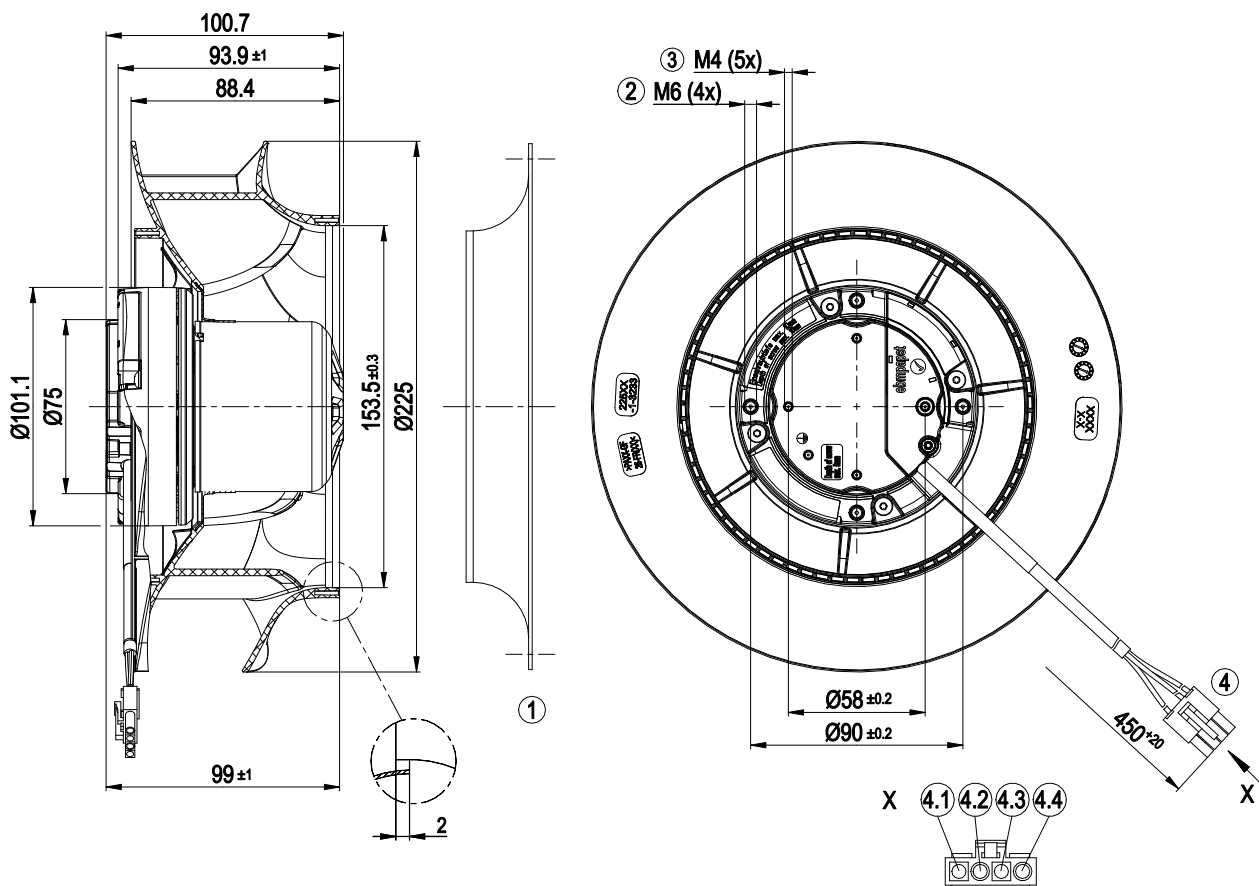


1	Accessory part: inlet ring 96358-2-4013 not included in scope of delivery
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 5 mm
4	Cable PVC AWG20
	4-pole connector housing JST ELP-04V, 3x socket SLF-41T-P1.3E
4.1	PE (green/yellow)
4.2	not used
4.3	N (blue)
4.4	L (black)

R3G225-RE07-25
ABB Industry FI

EC centrifugal fan

backward-curved, single-intake

Accessory part

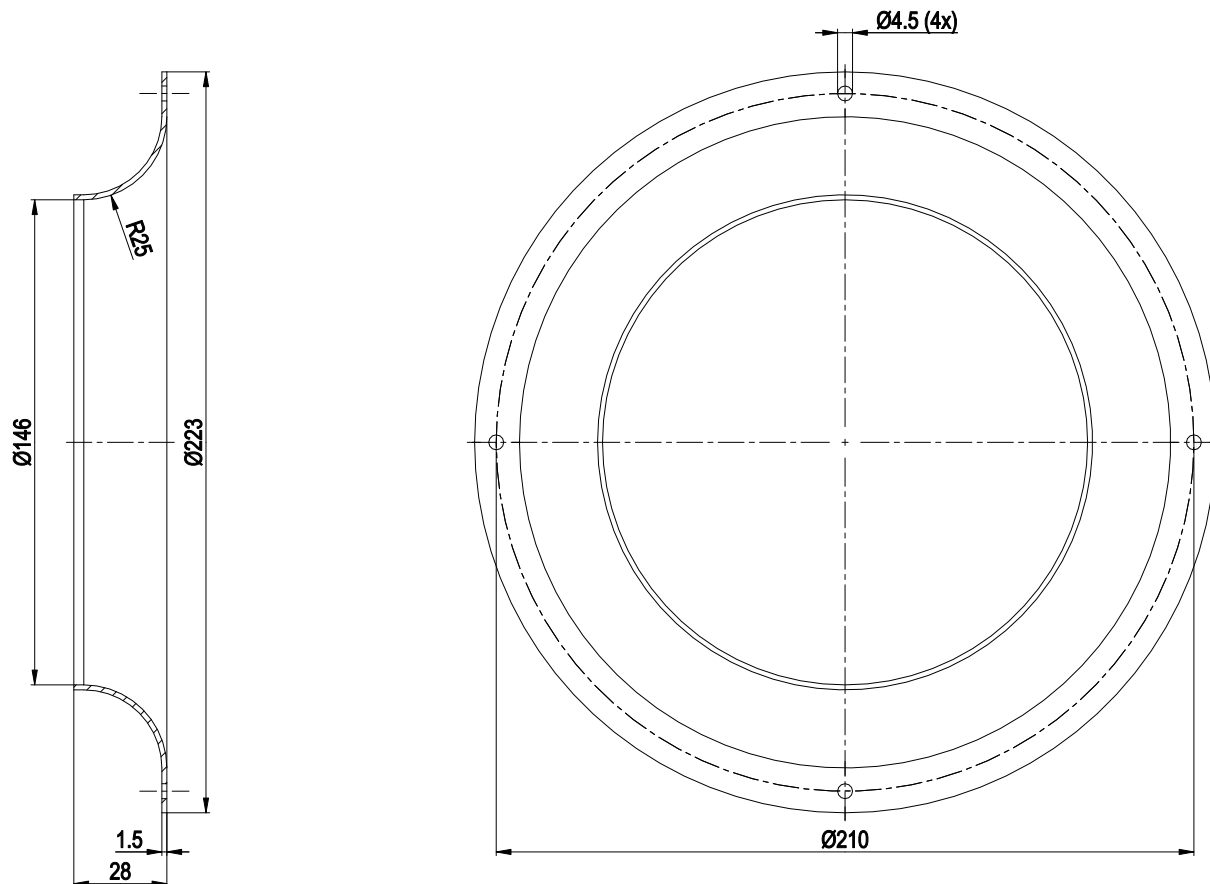


Inlet ring 96358-2-4013 not included in scope of delivery

R3G225-RE07-25
ABB Industry FI

EC centrifugal fan
backward-curved, single-intake

Connection diagram

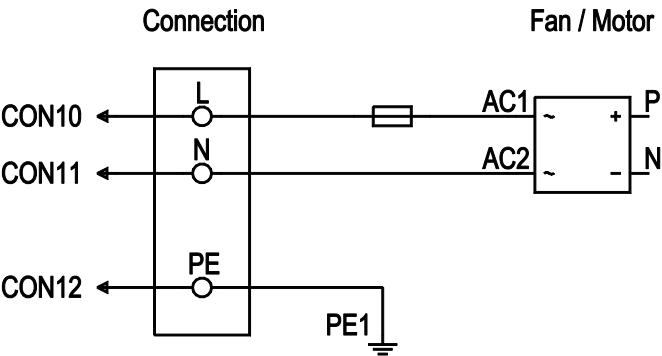


No.	Conn.	Designation	Color	Function/assignment
	CON 10	L	black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
	CON 11	N	blue	Neutral conductor
	CON 12	PE	green/yellow	Protective earth



R3G225-RE07-25
ABB Industry FI

EC centrifugal fan
backward-curved, single-intake

Curves: Air performance 50 Hz

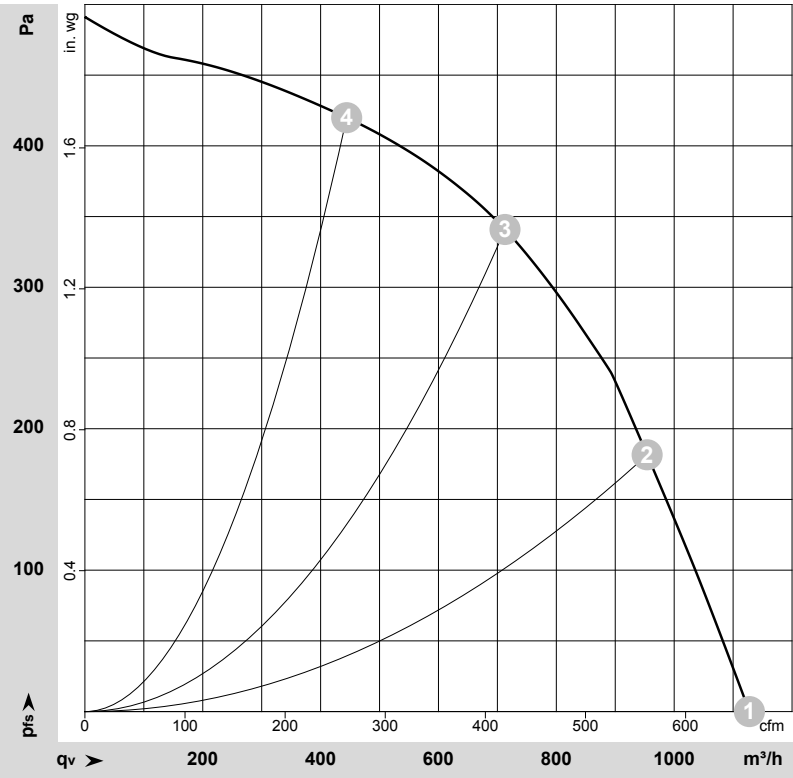

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-190901-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	1~	230	50	2680	113	0.95	1130	0	665	0.00
2	1~	230	50	2680	132	1.10	955	180	560	0.72
3	1~	230	50	2680	135	1.15	715	340	420	1.36
4	1~	230	50	2680	122	1.02	445	420	260	1.69

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

