

KARTA KATALOGOWA

R3G355-AX56-90

Wentylator promieniowy EC RadiPac, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst



Zdjęcie poglądowe

Dane znamionowe

Napięcie znamionowe	3~ 400 V (380...480 V)
Częstotliwość	50/60 Hz
Prędkość obrotowa	2140 obr/min
Pobór mocy	1000 W
Pobór prądu	1,65 A
Maks. wydajność	5315 m³/h
Maks. ciśnienie statyczne	800 Pa
Temperatura otoczenia	-25...+60 °C

Budowa


Średnica wirnika	355 mm
Materiał wirnika	blacha aluminiowa
Liczba łopatek	7
Stopień ochrony	IP54
Klasa izolacji	B
Zabezpieczenie silnika	termik (TOP)
Masa	9,3 kg

Dane ErP (UE 327/2011)

Sprawność całkowita	65,6 %
Przepływ w pkt. optymalnym	3905 m³/h
Przyrost ciśnienia	530 Pa
Regulacja obrotów	tak (0-10 V / PWM / MODBUS)

Charakterystyka przepływowa

Curves: Air performance 50 Hz

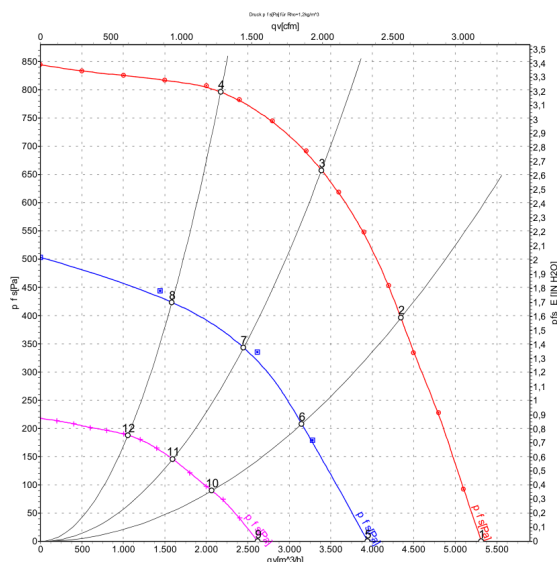

Measurement: LU-106551-1
Measurement: LU-108544-1
Measurement: LU-106552-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).

Wartości znamionowe dla punktu maksymalnego obciążenia; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R3G355-AX56-90

EC centrifugal fan - RadiPac

backward-curved, single-intake

Nominal data

Type	R3G355-AX56-90	
Motor	M3G112-EA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2140
Power consumption	W	1000
Current draw	A	1.65
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	65.6	51.3	09 Power consumption P_{ed}	kW	0.95
02 Measurement category		A		09 Air flow q_v	m³/h	3905
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	530
04 Efficiency grade N		76.3	62	10 Speed (rpm) n	min ⁻¹	2150
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$ LU-106551



R3G355-AX56-90

EC centrifugal fan - RadiPac

backward-curved, single-intake

Technical description

Weight	9.3 kg
Size	355 mm
Motor size	112
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Output 20 VDC, max. 50 mA - Output for slave 0-10 V - Input for sensor 0-10 V or 4-20 mA - External 24 V input (parameter setting) - Alarm relay - Integrated PID controller - Motor current limitation - PFC, passive - RS-485 MODBUS-RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from supply - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	CCC; EAC; UL 1004-7 + 60730-1




R3G355-AX56-90

EC centrifugal fan - RadiPac

backward-curved, single-intake

Product drawing

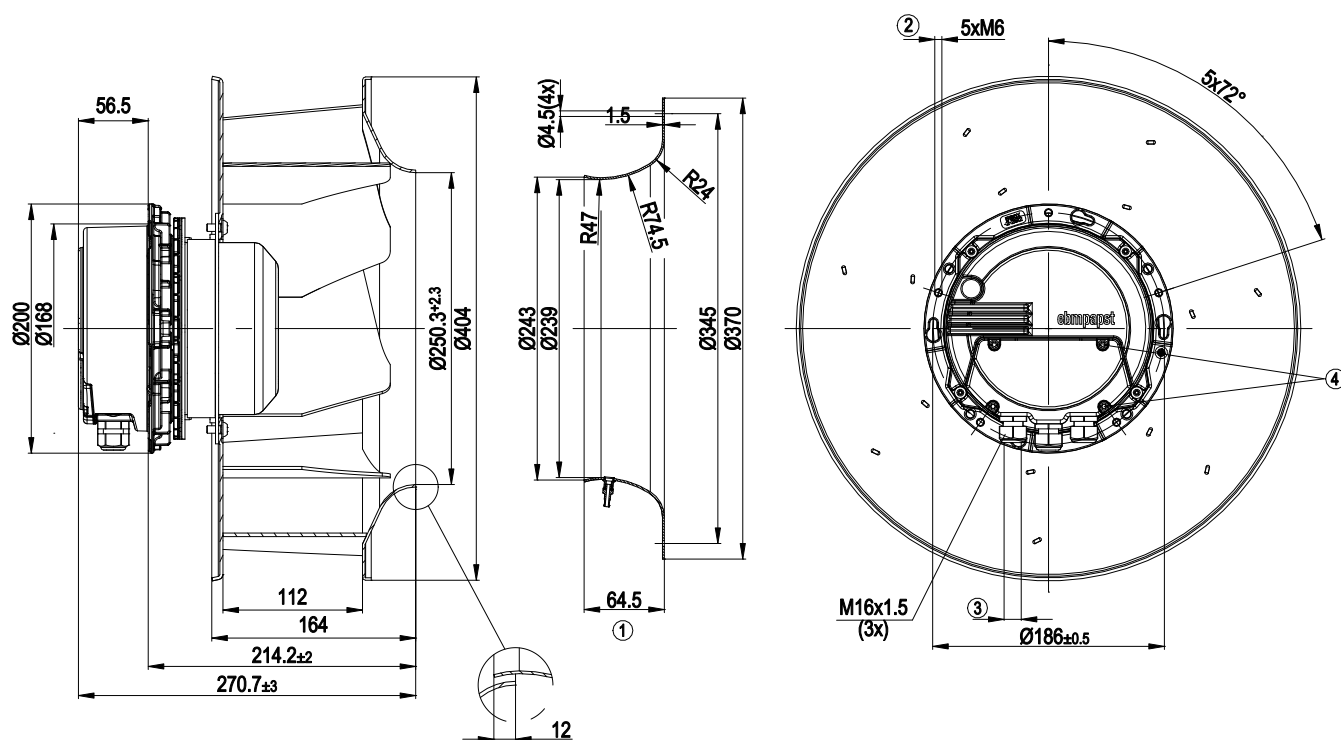


- | | |
|---|---|
| 1 | Accessory part: inlet ring 35675-2-4013 with pressure tap not included in scope of delivery, other inlet rings on request |
| 2 | Max. clearance for screw 16 mm |
| 3 | Cable diameter min. 4 mm; max. 10 mm; tightening torque 2.5 ± 0.4 Nm |
| 4 | Tightening torque 3.5 ± 0.5 Nm |

R3G355-AX56-90

EC centrifugal fan - RadiPac

backward-curved, single-intake

Connection diagram

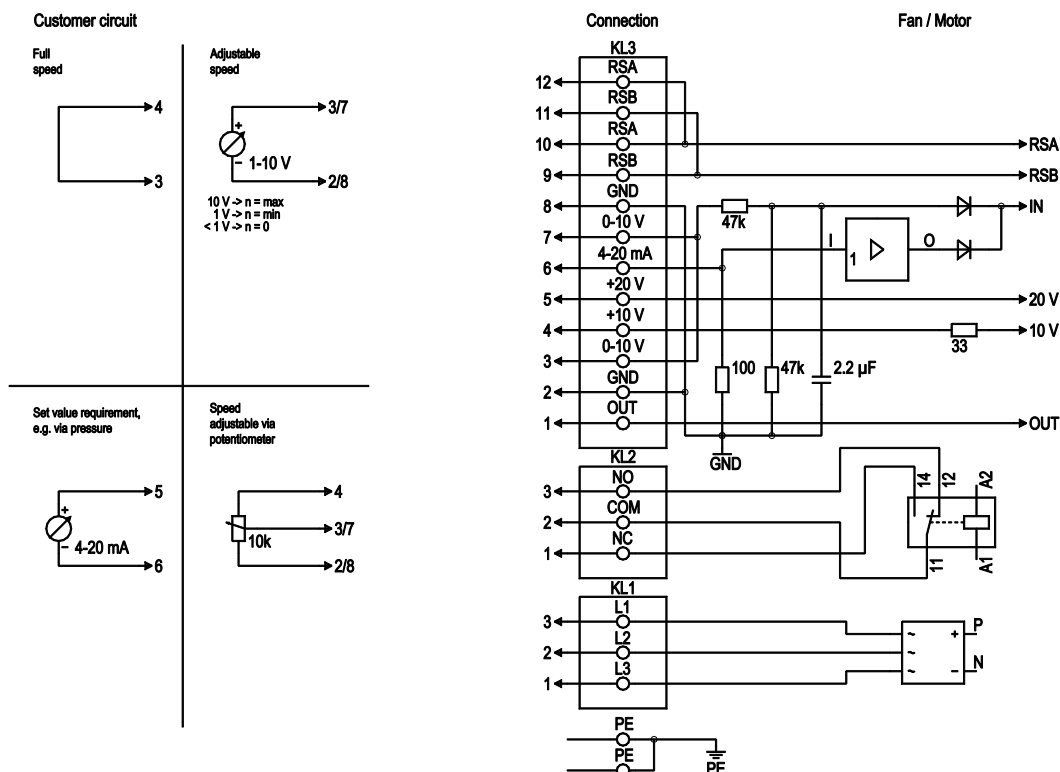


No.	Conn.	Designation	Function/assignment
PE		PE	Protective earth terminal
KL1	1, 2, 3	L1, L2, L3	Power supply, voltage range (see nameplate), 50/60 Hz
KL2	1	NC	Floating status contact, break for failure
KL2	2	COM	floating status contact, changeover contact, common connection (2 A, max. 250 VAC, min. 10 mA, AC1)
KL2	3	NO	Floating status contact, make for failure
KL3	1	OUT	Analog output, 0-10 VDC, max. 3 mA, SELV, output of current motor modulation level: 1 V corresponds to 10% modulation level. 10 V corresponds to 100% modulation level.
KL3	2, 8	GND	Reference ground for control interface, SELV
KL3	3, 7	0-10 V	Use control / current sensor value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV
KL3	4	+10 V	Voltage output 10 VDC (±3%), max. 10 mA, power supply for external devices (e.g. potentiometer), SELV
KL3	5	+20 V	Voltage output 20 VDC (+25%/-10%), max. 50 mA, power supply for external devices (e.g. sensors), SELV
KL3	6	4-20 mA	Use control / current sensor value input 4-20 mA, impedance 100 Ω only as alternative to 0-10 V input, SELV
KL3	9, 11	RSB	RS485 interface for MODBUS, RSB
KL3	10, 12	RSA	RS485 interface for MODBUS, RSA

R3G355-AX56-90

EC centrifugal fan - RadiPac

backward-curved, single-intake

Curves: Air performance 50 Hz

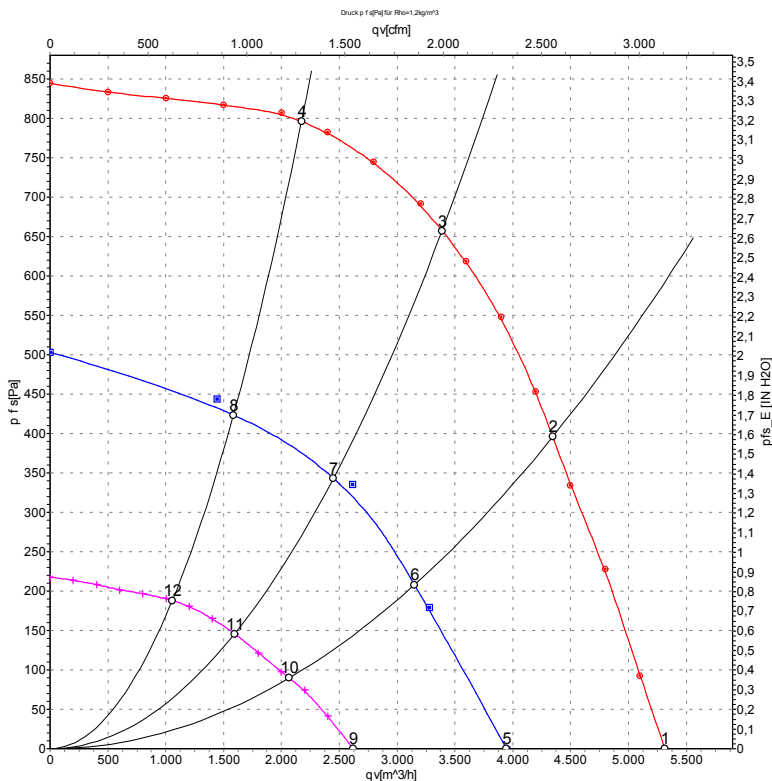

Measurement: LU-106551-1
Measurement: LU-108544-1
Measurement: LU-106552-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	400	50	2140	656	1.14	81	87	91	5315	0	3130	0.00
2	400	50	2140	893	1.50	71	77	83	4345	400	2555	1.61
3	400	50	2140	1000	1.65	68	75	81	3390	650	1995	2.61
4	400	50	2140	918	1.54	71	78	84	2175	800	1280	3.21
5	400	50	1610	286	0.57	72	79	84	3945	0	2320	0.00
6	400	50	1595	350	0.68	64	70	76	3150	210	1855	0.84
7	400	50	1580	387	0.74	62	69	75	2450	350	1440	1.41
8	400	50	1585	366	0.70	64	70	76	1585	431	935	1.73
9	400	50	1080	113	0.28	63	71	76	2620	0	1540	0.00
10	400	50	1065	133	0.31	57	64	69	2070	90	1215	0.36
11	400	50	1065	143	0.33	53	60	66	1595	146	940	0.59
12	400	50	1060	135	0.32	54	61	68	1055	188	620	0.75

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase



ebmpapst