

KARTA KATALOGOWA

R3G450-AG33-01

Wentylator promieniowy EC, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst




Dane znamionowe		Budowa	
Napięcie znamionowe	3~ 400 V (380...480 V)	Wielkość	450 mm
Częstotliwość	50/60 Hz	Silnik	M3G112-GA
Prędkość obrotowa	1550 obr/min	Materiał wirnika	blacha aluminiowa
Pobór mocy	1000 W	Obudowa elektroniki	odlew aluminiowy
Pobór prądu	1,85 A	Liczba łopatek	6
Maks. wydajność	6950 m³/h	Kierunek obrotów	w prawo, patrząc na wirnik
Maks. ciśnienie statyczne	670 Pa	Stopień ochrony	IP54
Temperatura otoczenia	-25...+60 °C	Klasa izolacji	B
Regulacja obrotów	0-10 V / PWM	Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
		Łożyskowanie	kulkowe
		Podłączenie	skrzynka zaciskowa
		Masa	11,2 kg

Dane ErP (UE 327/2011)	
Sprawność całkowita	63,6 %
Przepływ w pkt. optymalnym	4505 m³/h
Przyrost ciśnienia	470 Pa
Regulacja prędkości (ErP)	tak

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

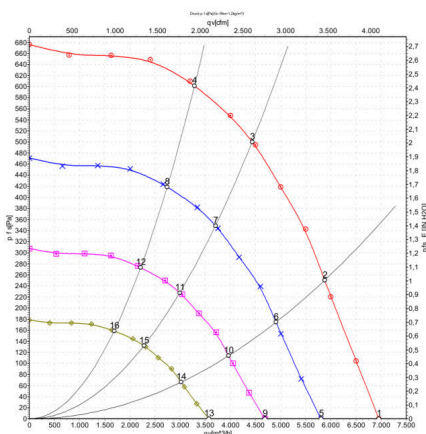

Measurement: LU-103318-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Noise sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R3G450-AG33-01

EC centrifugal fan

backward-curved, single-intake



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	R3G450-AG33-01	
Motor	M3G112-GA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1550
Power consumption	W	1000
Current draw	A	1.85
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual		Req. 2015	
01 Overall efficiency η_{es}	%	63.6		51.5	
02 Measurement category		A			
03 Efficiency category		Static			
04 Efficiency grade N		74.1		62	
05 Variable speed drive		Yes			
09 Power consumption P_{ed}	kW			1	
09 Air flow q_v	m³/h			4505	
09 Pressure increase p_{fs}	Pa			470	
10 Speed (rpm) n	min ⁻¹			1555	
11 Specific ratio*				1.00	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$ LU-103318



R3G450-AG33-01

EC centrifugal fan

backward-curved, single-intake

Technical description


Weight	11.2 kg
Size	450 mm
Motor size	112
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Output 20 VDC, max. 50 mA - Output for slave 0-10 V - Input for sensor 0-10 V or 4-20 mA - Alarm relay - Integrated PID controller - Motor current limitation - PFC, passive - RS-485 ebmBUS - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from supply - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (according to EN 61800-5-1)
Conformity with standards	EN 61800-5-1; CE
Approval	CSA C22.2 No. 77 + C22.2 No. 14; CCC; EAC; UL 1004-3 + UL 508C

R3G450-AG33-01

EC centrifugal fan

backward-curved, single-intake

Product drawing

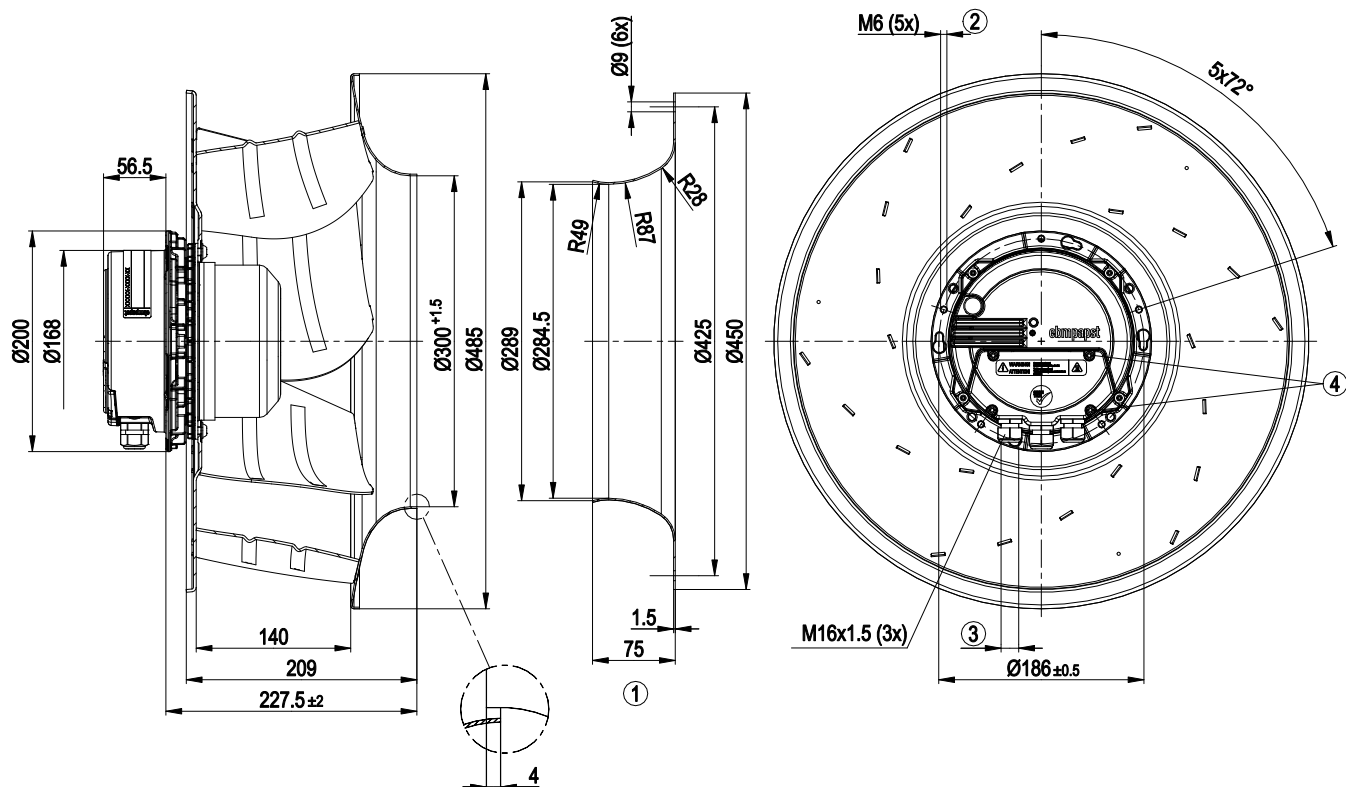


1	Accessory part: inlet ring 63045-2-4013 not included in scope of delivery
2	Max. clearance for screw 16 mm
3	Cable diameter min. 4 mm, max. 10 mm; tightening torque 4 ± 0.6 Nm
4	Tightening torque 3.5 ± 0.5 Nm

R3G450-AG33-01

EC centrifugal fan

backward-curved, single-intake

Connection diagram

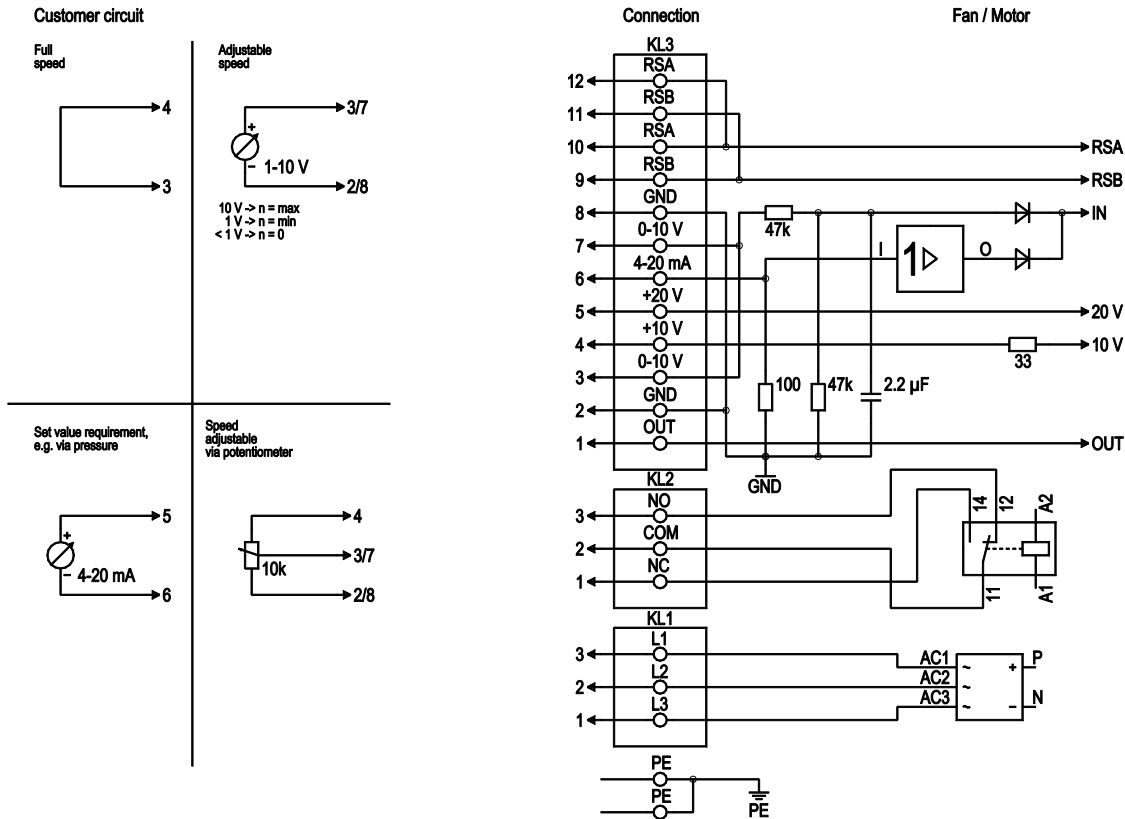

No.	Conn.	Designation	Function/assignment
PE		PE	Protective earth terminal
KL1	1, 2, 3	L1, L2, L3	Power supply 50/60 Hz
KL2	1	NC	Floating status contact, break for failure
KL2	2	COM	floating status contact, changeover contact, common connection (2 A, max. 250 VAC, min. 10 mA, AC1)
KL2	3	NO	Floating status contact, make for failure
KL3	1	OUT	Analog output, 0-10 VDC, max. 3 mA, SELV, output of current motor modulation level: 1 V corresponds to 10% modulation level. 10 V corresponds to 100% modulation level.
KL3	2, 8	GND	Reference ground for control interface, SELV
KL3	3, 7	0-10 V	Use control / current sensor value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV
KL3	4	+10 V	Voltage output 10 VDC (±3%), max. 10 mA, power supply for external devices (e.g. potentiometer), SELV
KL3	5	+20 V	Voltage output 20 VDC (+25%/-10%), max. 50 mA, power supply for external devices (e.g. sensors), SELV
KL3	6	4-20 mA	Use control / current sensor value input 4-20 mA, impedance 100 Ω only as alternative to 0-10 V input, SELV
KL3	9, 11	RSB	RS485 interface for ebmBUS, RSB, SELV
KL3	10, 12	RSA	RS485 interface for ebmBUS, RSA, SELV




R3G450-AG33-01

EC centrifugal fan

backward-curved, single-intake

Curves: Air performance 50 Hz

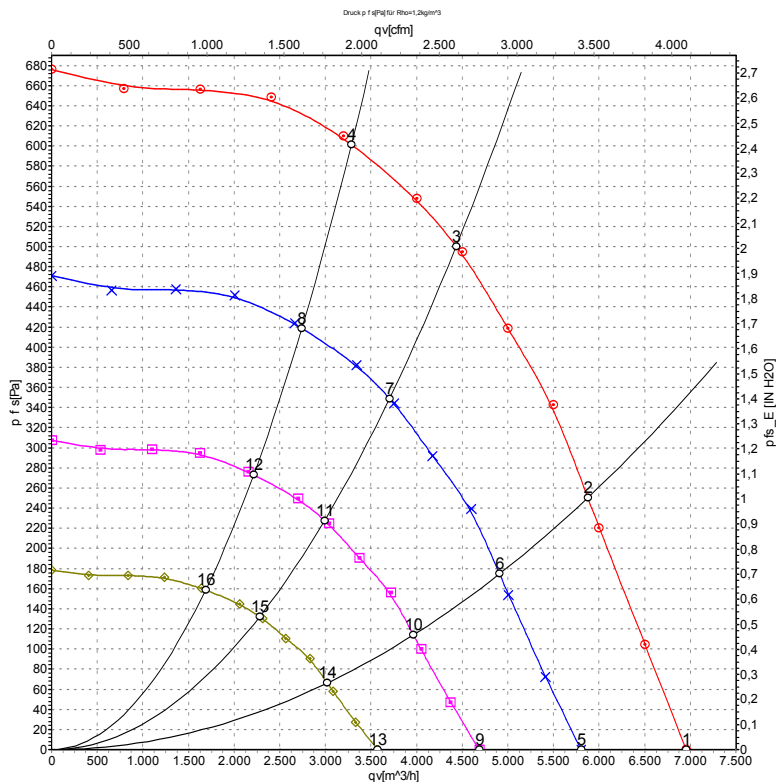

Measurement: LU-103318-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	400	50	1550	687	1.14	77	84	88	6955	0	4095	0.00
2	400	50	1550	894	1.43	71	78	84	5880	250	3460	1.00
3	400	50	1550	1000	1.85	66	74	80	4435	500	2610	2.01
4	400	50	1550	962	1.54	70	77	84	3285	600	1935	2.41
5	400	50	1300	399	0.66	73	80	84	5805	0	3415	0.00
6	400	50	1300	521	0.83	67	74	80	4910	175	2890	0.70
7	400	50	1300	586	0.94	63	70	76	3705	350	2180	1.41
8	400	50	1300	558	0.90	66	73	80	2740	420	1615	1.69
9	400	50	1050	210	0.35	68	75	79	4685	0	2760	0.00
10	400	50	1050	274	0.44	63	70	76	3965	114	2335	0.46
11	400	50	1050	309	0.50	58	65	72	2990	228	1760	0.92
12	400	50	1050	294	0.47	61	69	76	2215	274	1305	1.10
13	400	50	800	93	0.15	62	69	74	3570	0	2100	0.00
14	400	50	800	121	0.19	57	64	70	3020	66	1780	0.26
15	400	50	800	136	0.22	52	59	66	2280	132	1340	0.53
16	400	50	800	130	0.21	55	63	70	1685	159	995	0.64

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase

