

KARTA KATALOGOWA

R3G500-RA28-03

Wentylator promieniowy EC RadiCal, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst




Zdjęcie poglądowe

Dane znamionowe	
Napięcie znamionowe	3~ 400 V (380...480 V)
Częstotliwość	50/60 Hz
Prędkość obrotowa	1900 obr/min
Pobór mocy	3600 W
Pobór prądu	5,5 A
Maks. wydajność	13050 m³/h
Maks. ciśnienie statyczne	1345 Pa
Temperatura otoczenia	-40...+40 °C
Regulacja obrotów	MODBUS RTU

Budowa	
Wielkość	500 mm
Silnik	M3G150-FF
Materiał wirnika	tworzywo PP
Obudowa elektroniki	odlew aluminiowy
Liczba łopatek	7
Kierunek obrotów	w prawo, patrząc na wirnik
Stopień ochrony	IP55
Klasa izolacji	F
Zabezpieczenie silnika	ochrona przed odwrotną polaryzacją i zablokowaniem wirnika
Łożyskowanie	kulkowe
Podłączenie	skrzynka zaciskowa
Masa	20,98 kg

Dane ErP (UE 327/2011)	
Sprawność całkowita	64,3 %
Przepływ w pkt. optymalnym	8125 m³/h
Przyrost ciśnienia	979 Pa
Regulacja prędkości (ErP)	tak

Charakterystyka przepływowa (50 Hz)

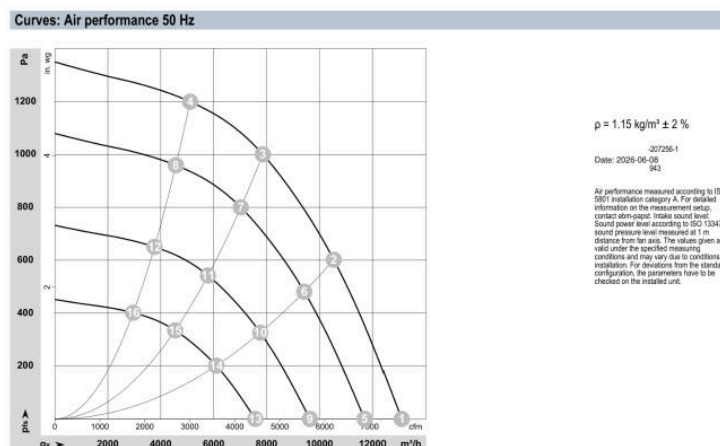

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R3G500-RA28-03

EC centrifugal fan - RadiCal

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	R3G500-RA28-03	
Motor	M3G150-FF	

Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1900
Power consumption	W	3600
Current draw	A	5.5
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Occasional start-up at temperatures between -40 °C and -25 °C is permitted. For continuous operation at ambient temperatures below -25 °C (such as refrigeration applications), a fan design with special low-temperature bearings must be used.

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	64.3	57.3	09 Power consumption P_{ed}	kW	3.58
02 Measurement category		A		09 Air flow q_v	m³/h	8125
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	979
04 Efficiency grade N		69	62	10 Speed (rpm) n	min ⁻¹	1900
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$

LU-207256

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 have been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

R3G500-RA28-03

EC centrifugal fan - RadiCal

backward-curved, single-intake

Technical description

Weight	20.98 kg
Size	500 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.3 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Power Factor Correction (PFC)	Passive (through low-capacitance DC link)
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 61800-5-1; CE; UKCA

R3G500-RA28-03

EC centrifugal fan - RadiCal
backward-curved, single-intake

Approval


UL 1004-7 + 60730-1; EAC; CSA C22.2 No. 77 + CAN/CSA-E60730-1

R3G500-RA28-03

EC centrifugal fan - RadiCal

backward-curved, single-intake

Product drawing

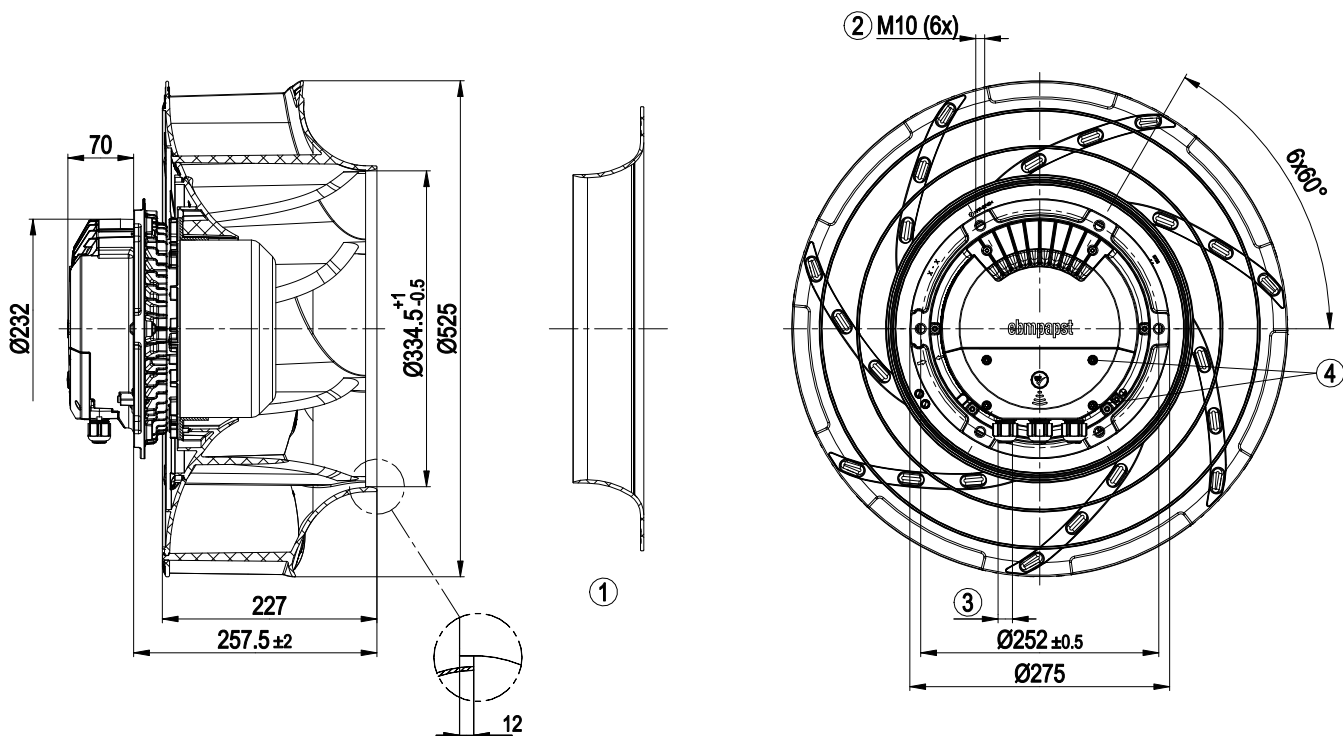

(The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)


4	Tightening torque 1.5 ± 0.2 Nm
1	Accessory part: inlet ring 50901-2-2943 not included in scope of delivery
2	Max. clearance for screw 20 mm
3	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm

R3G500-RA28-03

EC centrifugal fan - RadiCal

backward-curved, single-intake

Accessory part

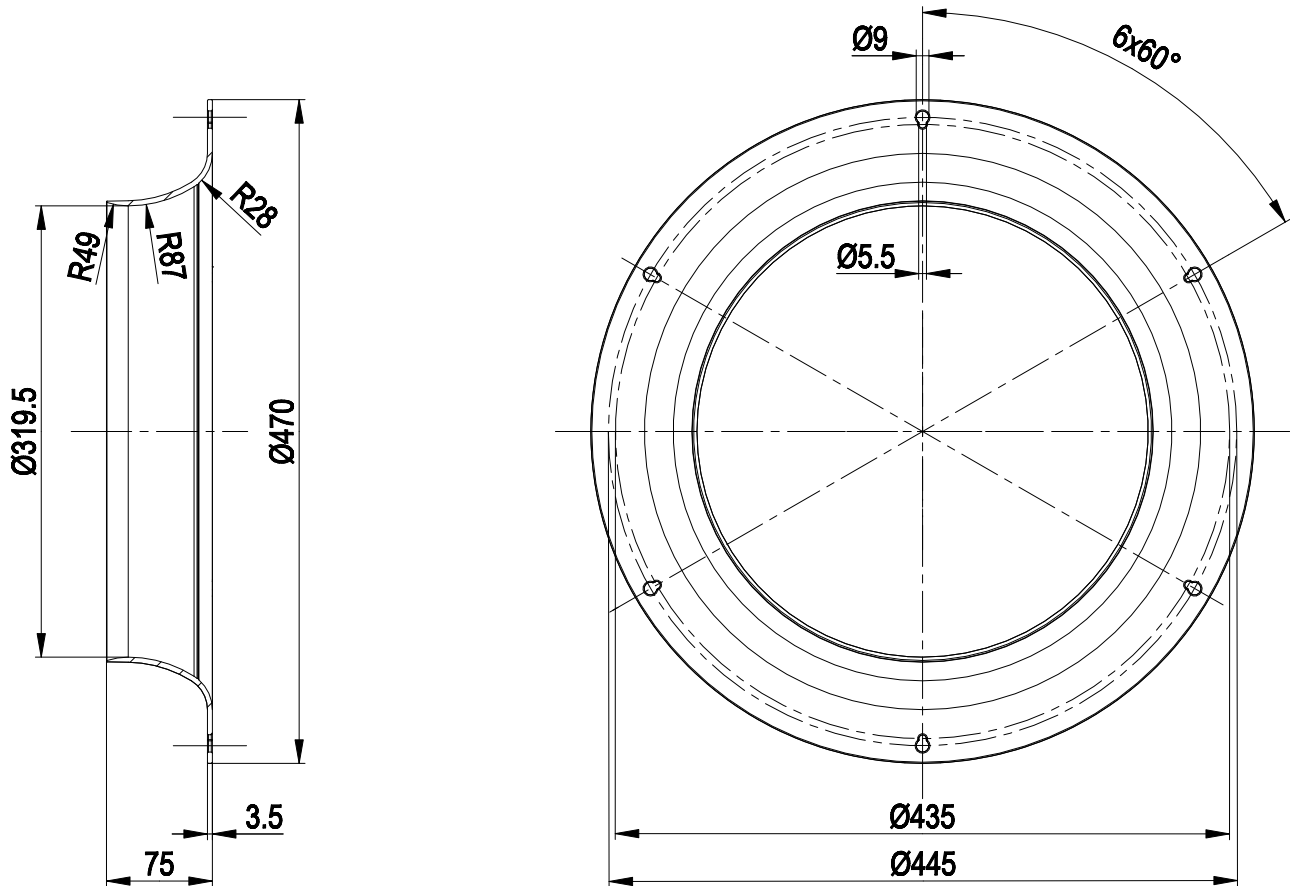


1 Accessory part: inlet ring 50901-2-2943

R3G500-RA28-03

EC centrifugal fan - RadiCal

backward-curved, single-intake

Connection diagram

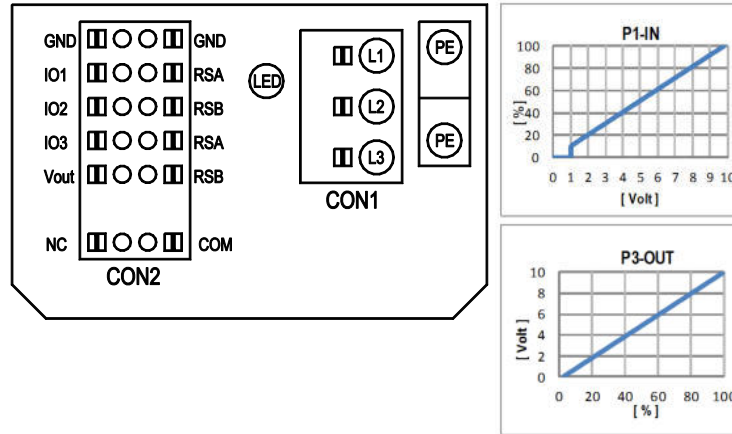

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V / PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Fan modulation level Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

R3G500-RA28-03

EC centrifugal fan - RadiCal

backward-curved, single-intake

Terminal/plug assignment

configurable option	For further information and additional functions see EC Control Software, Fan-Set-App. or MODBUS Parameter Specification V6.3	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	electrical specification	configurable IO mode	CON2																IO1	IO2	IO3	RSA	RSB	Vout
						Din1 (active high): digital input																					
						active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC																					
						Ri = 100k, characteristic curve parameterizable, f _{PWM} = 1k...10kHz SELV																					
						Umax = 50VDC, Imax = 20mA SELV																					
						Umax = 50VDC, Imax = 20mA SELV																					
						Din2 (active high): digital input																					
						active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC																					
						Ri = 100k, characteristic curve parameterizable, f _{PWM} = 1k...10kHz SELV																					
						Ri = 125R, characteristic curve parameterizable, SELV																					
Din3 (active high): digital input																											
active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC																											
Din3 (active low): digital input																											
active: applied voltage < 1.5VDC, SELV not active: pin open or applied voltage 3.5-50VDC																											
PWMIn3: digital input, idle level high																											
active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV																											
40Hz - 10kHz, characteristics parameterizable																											
active: applied voltage 3.5-50VDC																											
not active: pin open or applied voltage < 1.5VDC, SELV																											
Din3 (active high): digital input, idle level low																											
active: applied voltage 3.5-50VDC																											
not active: pin open or applied voltage < 1.5VDC, SELV																											
Aout3 0-10V: analog output																											
function parameterizable, max. 5mA, max output frequency 300Hz SELV																											
Tacho out (pulses): analog output																											
0-10V max. 5mA, max output frequency 300Hz SELV																											
Diagnostics out (pulses)																											
0-10V max. 5mA, max output frequency 300Hz SELV																											
MODBUS RTU, specification V6.3, SELV																											
RS485 bus connection,																											
voltage output																											
voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV																											
alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage																											
15...50VDC																											

configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	electrical specification	configurable IO mode	INPUT	OUTPUT	source: set value	D101 [...]	D147 [...]	D104 [...]	D12E [...]	D148 [...]	D16C [...]	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	D130 [1]	D130 [2]	D130 [5]	D130 [4]	source: sensor value	switch: parameter set: #1 / #2	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	switch: set value source	switch: fan enable / disable	signal: tach out (selected directly via IO mode)	signal: fan modulation level %	signal: actual speed	signal: system modulation level %	signal: remote control output 0-10V	pulse input for auto-addressing	pulse output for auto-addressing																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
						○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

○ configurable option


For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3

R3G500-RA28-03

EC centrifugal fan - RadiCal

backward-curved, single-intake

Curves: Air performance 50 Hz

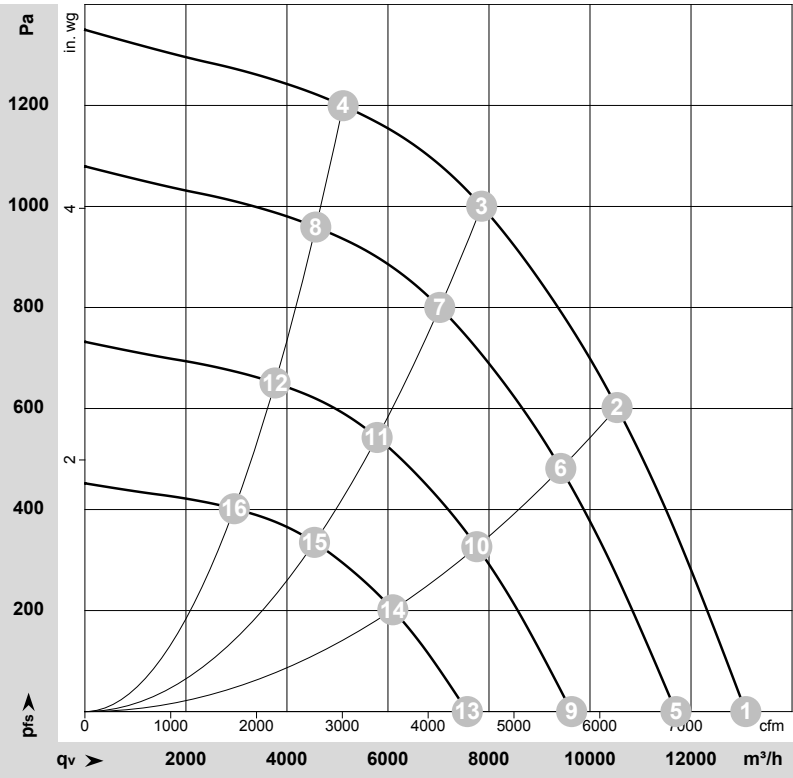

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

-207256-1
Date: 2026-06-08
943

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	3~	400	50	1900	2533	3.92	81	89	96	13085	0	7700	0.00
2	3~	400	50	1900	3413	5.22	76	84	91	10535	600	6200	2.41
3	3~	400	50	1900	3600	5.50	72	79	86	7855	1000	4625	4.01
4	3~	400	50	1900	3135	4.81	78	85	89	5110	1200	3010	4.82
5	3~	400	50	1700	1812	2.80	79	86	93	11700	0	6890	0.00
6	3~	400	50	1700	2441	3.73	74	81	88	9420	482	5545	1.94
7	3~	400	50	1700	2546	3.89	69	76	83	7025	803	4135	3.22
8	3~	400	50	1700	2242	3.44	75	82	86	4570	962	2690	3.86
9	3~	400	50	1400	1012	1.56	74	81	88	9635	0	5670	0.00
10	3~	400	50	1400	1363	2.09	69	76	83	7760	327	4565	1.31
11	3~	400	50	1400	1422	2.17	64	72	79	5785	545	3405	2.19
12	3~	400	50	1400	1252	1.92	70	77	81	3765	652	2215	2.62
13	3~	400	50	1100	491	0.76	68	75	82	7570	0	4455	0.00
14	3~	400	50	1100	661	1.01	63	70	77	6095	202	3590	0.81
15	3~	400	50	1100	690	1.05	58	65	73	4545	336	2675	1.35
16	3~	400	50	1100	607	0.93	64	71	75	2960	403	1740	1.62

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase