

KARTA KATALOGOWA

R3G560-RA24-02

Wentylator promieniowy EC RadiCal, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst



Zdjęcie poglądowe


Dane znamionowe	
Napięcie znamionowe	3~ 400 V (380...480 V)
Częstotliwość	50/60 Hz
Prędkość obrotowa	1675 obr/min
Pobór mocy	3150 W
Pobór prądu	4,9 A
Maks. wydajność	14685 m³/h
Maks. ciśnienie statyczne	1010 Pa
Temperatura otoczenia	-40...+55 °C

Dane ErP (UE 327/2011)	
Sprawność całkowita	65,2 %
Przepływ w pkt. optymalnym	9560 m³/h
Przyrost ciśnienia	750 Pa
Regulacja obrotów	tak (0-10 V / PWM / MODBUS)

Budowa	
Średnica wirnika	560 mm
Materiał wirnika	tworzywo PP
Liczba łopatek	7
Stopień ochrony	IP55
Klasa izolacji	F
Masa	21,62 kg

Charakterystyka przepływowa

Curves: Air performance 50 Hz

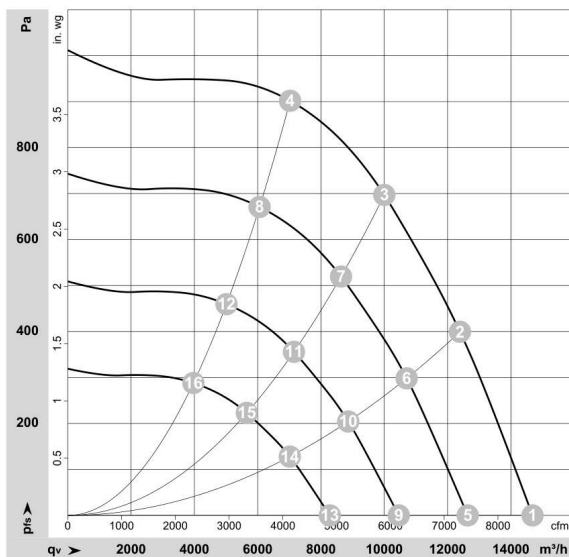

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-206345-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).

Wartości znamionowe dla punktu maksymalnego obciążenia; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

R3G560-RA24-02

EC centrifugal fan - RadiCal

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R3G560-RA24-02	
Motor	M3G150-FF	

Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60

Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1675
Power consumption	W	3150
Current draw	A	4.9
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	55

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	65.2	56.8	09 Power consumption P_{ed}	kW	3.2
02 Measurement category		A		09 Air flow q_v	m ³ /h	9560
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	750
04 Efficiency grade N		70.4	62	10 Speed (rpm) n	min ⁻¹	1680
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

 * Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-206345

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).


ebmpapst

R3G560-RA24-02

EC centrifugal fan - RadiCal

backward-curved, single-intake

Technical description

Weight	21.62 kg
Size	560 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.3 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1




R3G560-RA24-02

EC centrifugal fan - RadiCal

backward-curved, single-intake

Product drawing

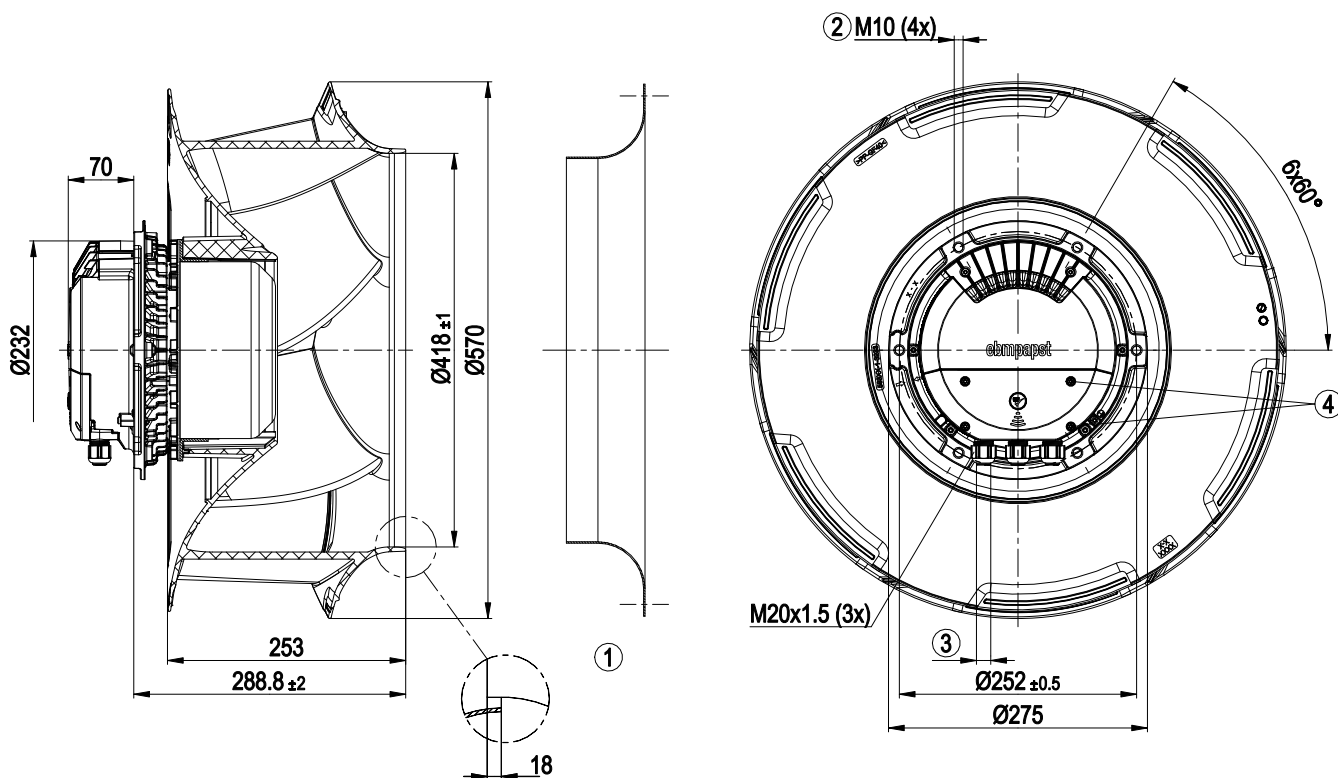

1 Accessory part: inlet ring 54482-2-4013 not included in scope of delivery

2 Max. clearance for screw 20 mm

3 Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm

(The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)


4 Tightening torque 1.5 ± 0.2 Nm

R3G560-RA24-02

EC centrifugal fan - RadiCal

backward-curved, single-intake

Accessory part

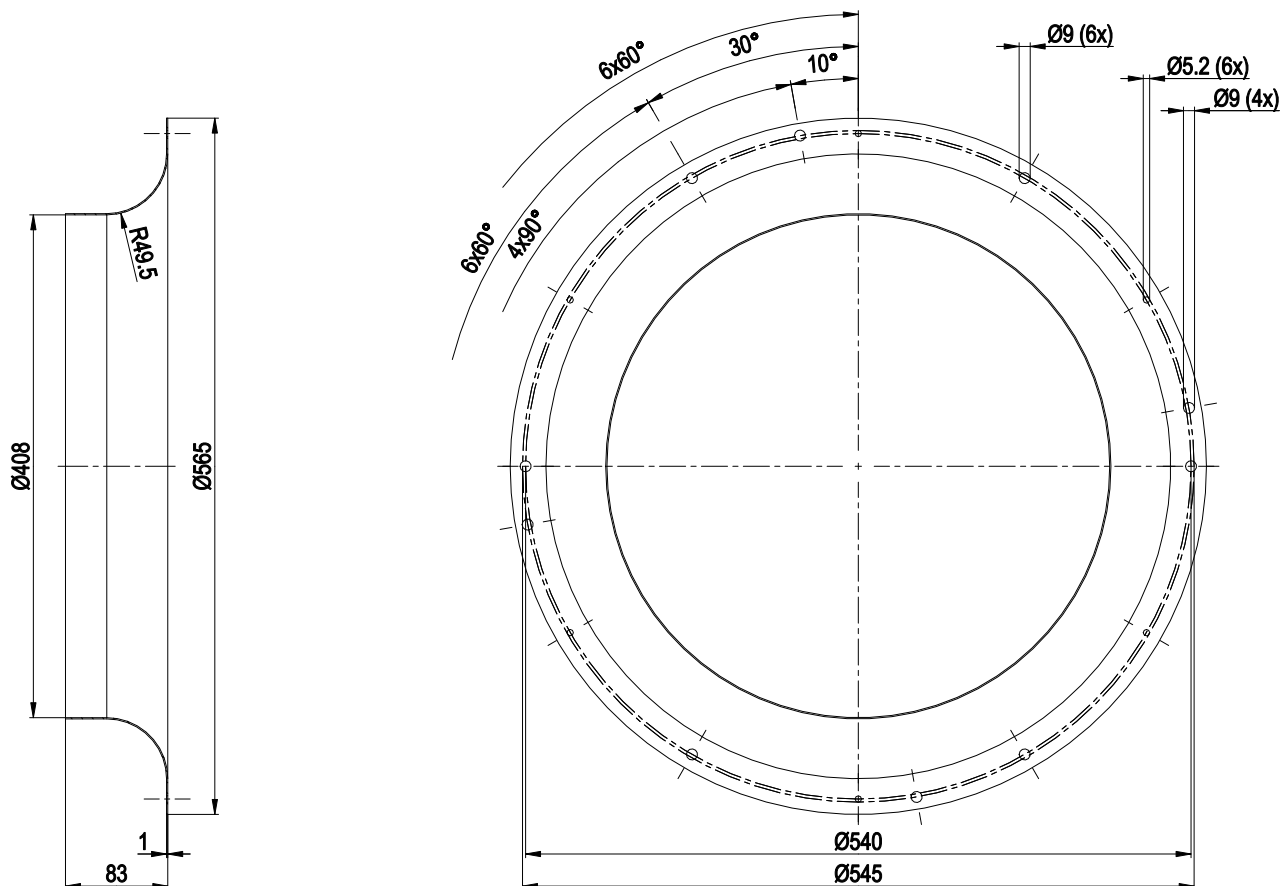


Inlet ring 54482-2-4013

R3G560-RA24-02

EC centrifugal fan - RadiCal

backward-curved, single-intake

Connection diagram

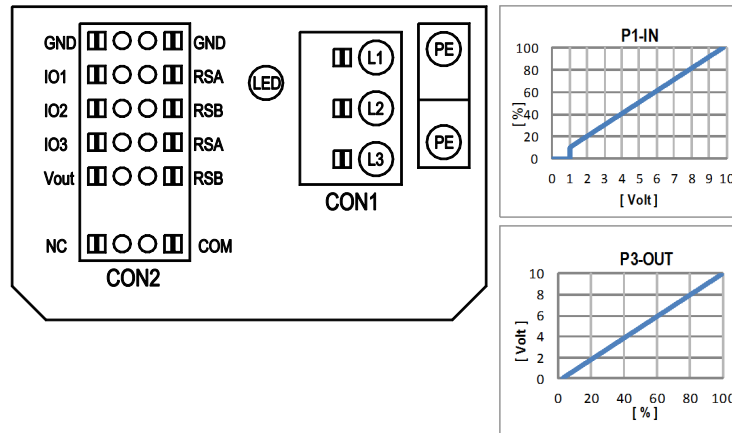

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V / PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Fan modulation level Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

R3G560-RA24-02

EC centrifugal fan - RadiCal

backward-curved, single-intake

Terminal/plug assignment


[illegible]

R3G560-RA24-02

EC centrifugal fan - RadiCal

backward-curved, single-intake

Curves: Air performance 50 Hz

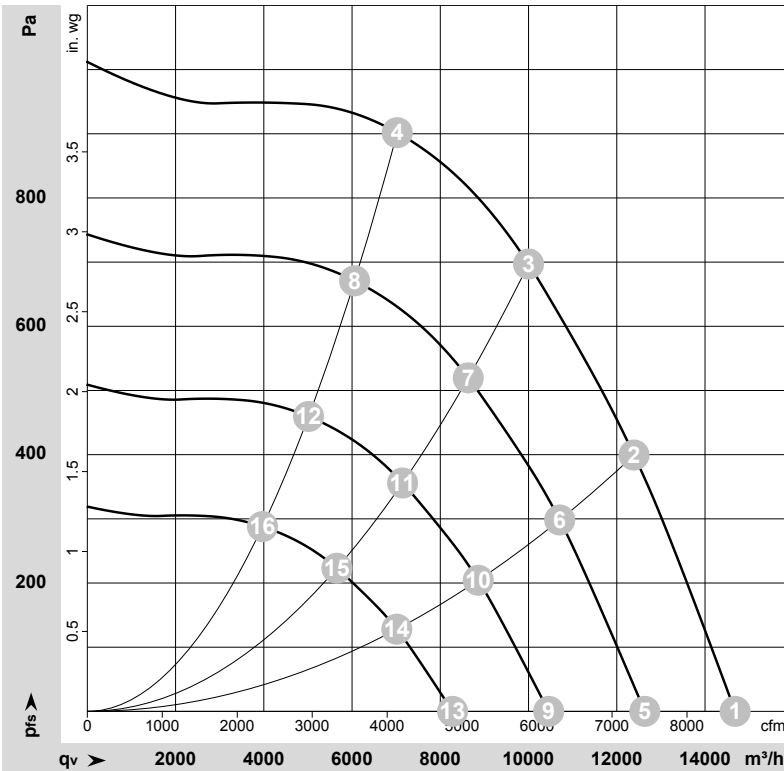

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-206345-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	3~	400	50	1675	2224	3.46	81	88	92	14685	0	8640	0.00
2	3~	400	50	1675	2925	4.50	77	84	88	12390	400	7290	1.61
3	3~	400	50	1675	3150	4.90	73	81	85	10000	700	5885	2.81
4	3~	400	50	1675	3058	4.69	74	82	85	7025	900	4135	3.61
5	3~	400	50	1450	1417	2.20	77	85	88	12635	0	7435	0.00
6	3~	400	50	1450	1889	2.90	73	80	84	10705	300	6300	1.20
7	3~	400	50	1450	2052	3.14	70	77	81	8635	521	5080	2.09
8	3~	400	50	1450	1962	3.01	71	78	82	6060	671	3565	2.69
9	3~	400	50	1200	803	1.25	72	80	83	10455	0	6155	0.00
10	3~	400	50	1200	1071	1.65	68	76	80	8860	205	5215	0.82
11	3~	400	50	1200	1163	1.78	65	72	76	7145	357	4205	1.43
12	3~	400	50	1200	1112	1.71	66	74	77	5015	460	2950	1.85
13	3~	400	50	950	399	0.62	66	74	77	8280	0	4870	0.00
14	3~	400	50	950	531	0.82	62	70	74	7015	129	4130	0.52
15	3~	400	50	950	577	0.88	59	66	71	5655	223	3330	0.90
16	3~	400	50	950	552	0.85	60	68	71	3970	288	2335	1.16

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

