

## KARTA KATALOGOWA

# R3G560-RB31-71

Wentylator promieniowy EC RadiCal, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst



Zdjęcie poglądowe


| Dane znamionowe           |                        |
|---------------------------|------------------------|
| Napięcie znamionowe       | 3~ 400 V (380...480 V) |
| Częstotliwość             | 50/60 Hz               |
| Prędkość obrotowa         | 1650 obr/min           |
| Pobór mocy                | 2900 W                 |
| Pobór prądu               | 4,43 A                 |
| Maks. wydajność           | 12075 m³/h             |
| Maks. ciśnienie statyczne | 900 Pa                 |
| Temperatura otoczenia     | -25...+65 °C           |

| Dane ErP (UE 327/2011)     |                             |
|----------------------------|-----------------------------|
| Sprawność całkowita        | 68,2 %                      |
| Przepływ w pkt. optymalnym | 9845 m³/h                   |
| Przyrost ciśnienia         | 688 Pa                      |
| Regulacja obrotów          | tak (0-10 V / PWM / MODBUS) |

| Budowa                 |                                     |
|------------------------|-------------------------------------|
| Średnica wirnika       | 560 mm                              |
| Materiał wirnika       | tworzywo PP                         |
| Liczba łopatek         | 6                                   |
| Stopień ochrony        | IP55                                |
| Klasa izolacji         | F                                   |
| Zabezpieczenie silnika | ochrona przed zablokowaniem wirnika |
| Masa                   | 26,5 kg                             |

## Charakterystyka przepływowa

Curves: Air performance 50 Hz

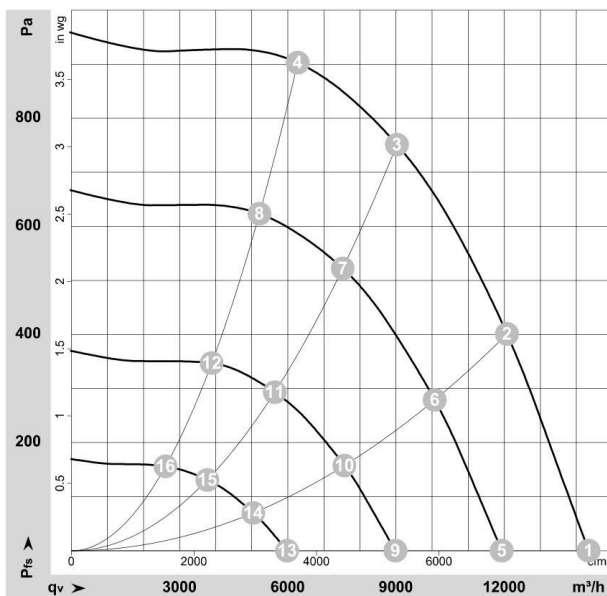

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-162213-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).

Wartości znamionowe dla punktu maksymalnego obciążenia; producent zastrzega możliwość zmian.

## Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199  
biuro@luftberg.pl · www.luftberg.pl

**R3G560-RB31-71**

# EC centrifugal fan - RadiCal

backward-curved, single-intake

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                          |                       |            |
|--------------------------|-----------------------|------------|
| Type                     | <b>R3G560-RB31-71</b> |            |
| Motor                    | <b>M3G150-IF</b>      |            |
| Phase                    |                       | 3~         |
| Nominal voltage          | VAC                   | 400        |
| Nominal voltage range    | VAC                   | 380 .. 480 |
| Frequency                | Hz                    | 50/60      |
| Method of obtaining data |                       | ml         |
| Speed (rpm)              | min <sup>-1</sup>     | 1650       |
| Power consumption        | W                     | 2900       |
| Current draw             | A                     | 4.43       |
| Min. ambient temperature | °C                    | -25        |
| Max. ambient temperature | °C                    | 55         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (EN 17166)

|                                   |   | Actual | Req. 2015 |                               |                   |      |
|-----------------------------------|---|--------|-----------|-------------------------------|-------------------|------|
| 01 Overall efficiency $\eta_{es}$ | % | 68.2   | 56.4      | 09 Power consumption $P_{ed}$ | kW                | 2.92 |
| 02 Measurement category           |   | A      |           | 09 Air flow $q_v$             | m <sup>3</sup> /h | 9845 |
| 03 Efficiency category            |   | Static |           | 09 Pressure increase $p_{fs}$ | Pa                | 688  |
| 04 Efficiency grade N             |   | 73.8   | 62        | 10 Speed (rpm) n              | min <sup>-1</sup> | 1645 |
| 05 Variable speed drive           |   | Yes    |           | 11 Specific ratio*            |                   | 1.01 |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

 \* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 

LU-162213



R3G560-RB31-71

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Technical description

|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 26.5 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Size                                                                       | 560 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Motor size                                                                 | 150                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Rotor surface                                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Electronics housing material                                               | Die-cast aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Impeller material                                                          | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Number of blades                                                           | 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Degree of protection                                                       | IP55                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Insulation class                                                           | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Moisture (F) / Environmental (H) protection class                          | H1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Condensation drainage holes                                                | On rotor side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Motor bearing                                                              | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Operation and alarm display</li> <li>- External 24 V input (parameter setting)</li> <li>- External release input</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limitation</li> <li>- PFC, passive</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from supply</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC immunity to interference                                               | According to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| EMC interference emission                                                  | According to EN 55022 (Class B, household environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Electrical hookup                                                          | Terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Motor protection                                                           | Reverse polarity and locked-rotor protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Protection class                                                           | I (if protective earth is connected by customer to the housing's connection point)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Conformity with standards                                                  | EN 61800-5-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Approval                                                                   | EAC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |




**R3G560-RB31-71**

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Product drawing

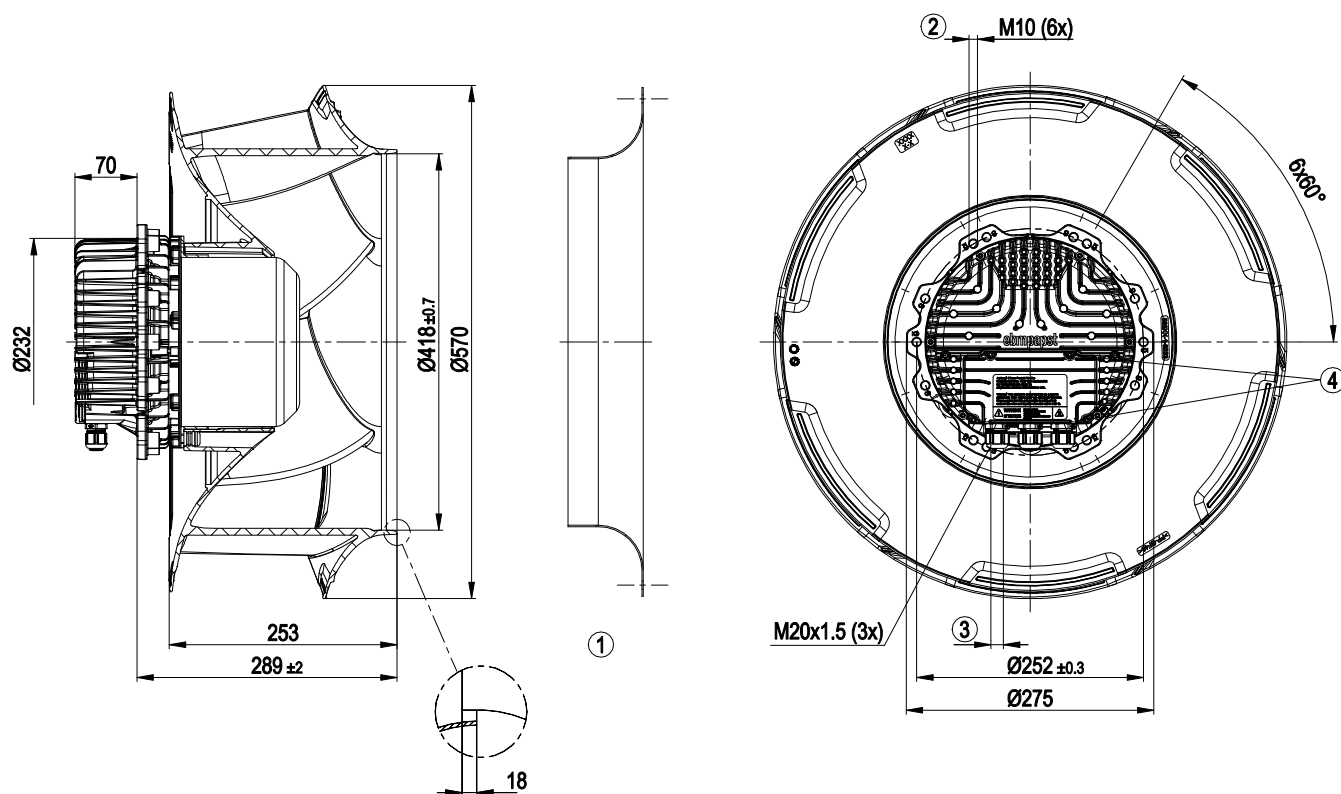


|   |                                                                           |
|---|---------------------------------------------------------------------------|
| 1 | Accessory part: inlet ring 54482-2-4013 not included in scope of delivery |
| 2 | Max. clearance for screw 25 mm                                            |
| 3 | Cable diameter min. 4 mm, max. 10 mm, tightening torque $4 \pm 0.6$ Nm    |
| 4 | Tightening torque $3.5 \pm 0.5$ Nm                                        |

R3G560-RB31-71

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Accessory part

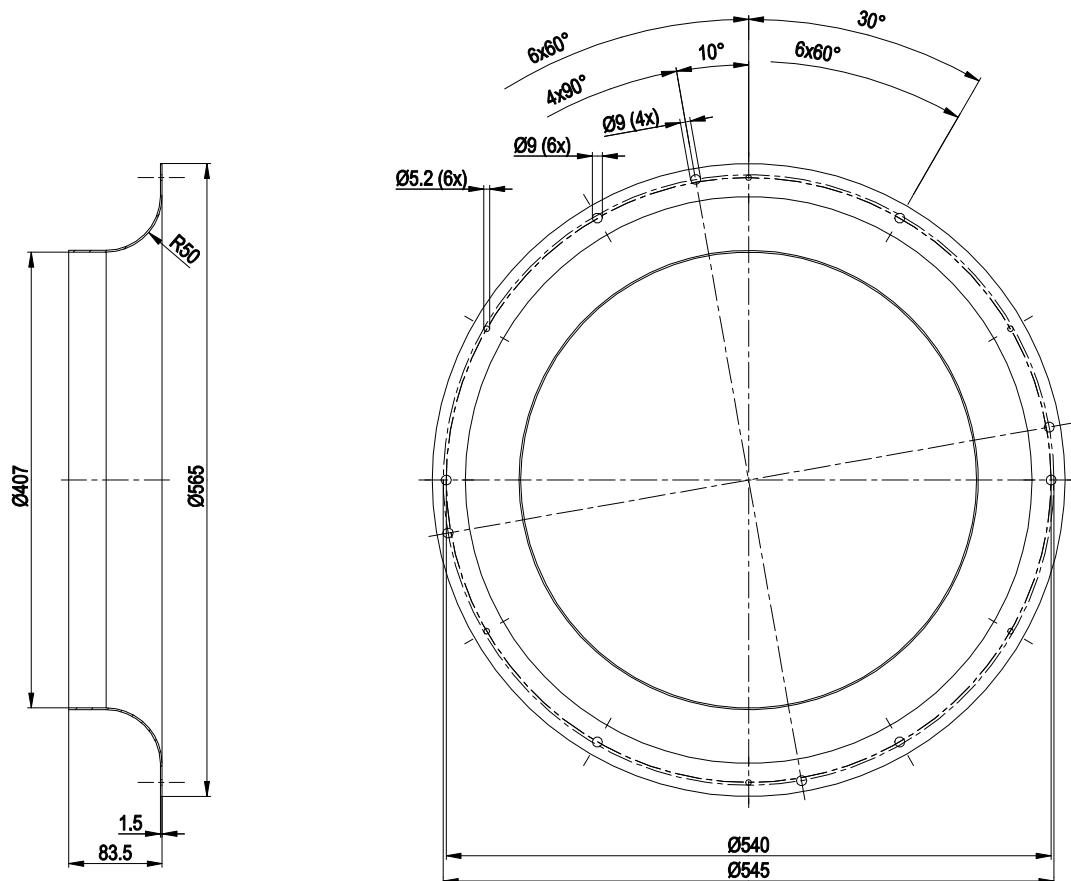


Accessory part: inlet ring 54482-2-4013 not included in scope of delivery

**R3G560-RB31-71**

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Connection diagram

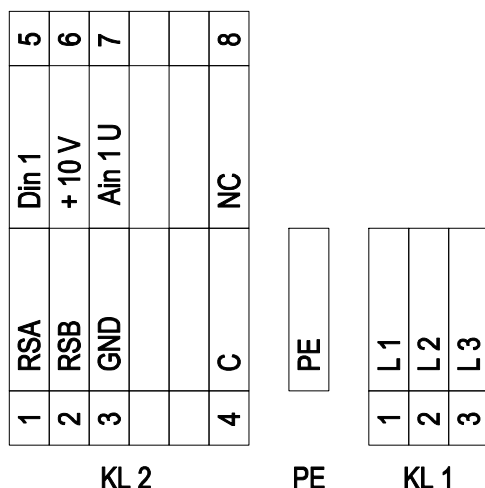

| No.  | Conn. | Designation | Function/assignment                                                                                                                                                                                                     |
|------|-------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KL 1 | 1     | L1          | Supply connection, power supply 3-phase 380-480 VAC, 50/60 Hz                                                                                                                                                           |
| KL 1 | 2     | L2          | Supply connection, power supply 3-phase 380-480 VAC, 50/60 Hz                                                                                                                                                           |
| KL 1 | 3     | L3          | Supply connection, power supply 3-phase 380-480 VAC, 50/60 Hz                                                                                                                                                           |
| PE   |       | PE          | Ground connection, PE connection                                                                                                                                                                                        |
| KL 2 | 1     | RSA         | Bus connection RS485, RSA, MODBUS-RTU; SELV                                                                                                                                                                             |
| KL 2 | 2     | RSB         | Bus connection RS485, RSB, MODBUS-RTU; SELV                                                                                                                                                                             |
| KL 2 | 3     | GND         | Reference ground for control interface; SELV                                                                                                                                                                            |
| KL 2 | 4     | C           | Status relay, floating status contact, break for failure; contact rating 250 VAC / max. 2 A (AC1) / min. 10 mA                                                                                                          |
| KL 2 | 5     | Din1        | Digital input 1 enable electronics,<br>enable: pin open or applied voltage 5-50 VDC<br>disable: bridge to GND or applied voltage < 1 VDC<br>reset function: triggers software reset after a level change to < 1 V; SELV |
| KL 2 | 6     | + 10 V      | Fixed voltage output 10 VDC, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot); SELV<br>Or: +24 VDC input for parameter setting via MODBUS without line voltage                  |
| KL 2 | 7     | Ain1 U      | Analog input 1 (set value) 0-10 V, Ri = 100 kΩ, adjustable curve; SELV                                                                                                                                                  |
| KL 2 | 8     | NC          | Status relay, floating status contact, break for failure                                                                                                                                                                |




R3G560-RB31-71

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Curves: Air performance 50 Hz

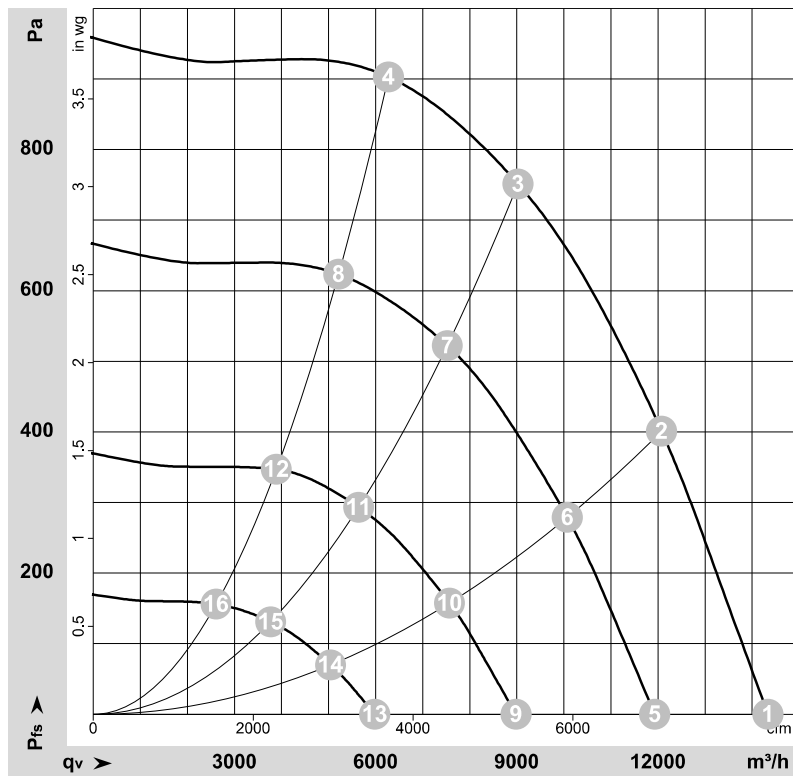

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-162213-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Wired | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|----|-------|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|----------------|-----------------|----------------|-----------------|
|    |       | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | dB(A)              | m³/h           | Pa              | cfm            | in. wg          |
| 1  | Y     | 400 | 50 | 1650              | 2030            | 3.17 | 79                | 87                | 90                 | 14335          | 0               | 8440           | 0.00            |
| 2  | Y     | 400 | 50 | 1650              | 2695            | 4.16 | 73                | 81                | 85                 | 12075          | 400             | 7105           | 1.61            |
| 3  | Y     | 400 | 50 | 1650              | 2900            | 4.43 | 69                | 77                | 82                 | 9025           | 750             | 5310           | 3.01            |
| 4  | Y     | 400 | 50 | 1650              | 2769            | 4.28 | 73                | 81                | 85                 | 6270           | 900             | 3690           | 3.61            |
| 5  | Y     | 400 | 50 | 1375              | 1191            | 1.94 | 75                | 83                | 86                 | 11930          | 0               | 7020           | 0.00            |
| 6  | Y     | 400 | 50 | 1375              | 1592            | 2.53 | 69                | 77                | 81                 | 10070          | 280             | 5930           | 1.12            |
| 7  | Y     | 400 | 50 | 1375              | 1705            | 2.70 | 64                | 73                | 77                 | 7525           | 522             | 4430           | 2.10            |
| 8  | Y     | 400 | 50 | 1375              | 1610            | 2.56 | 68                | 76                | 80                 | 5210           | 624             | 3070           | 2.51            |
| 9  | Y     | 400 | 50 | 1035              | 534             | 1.07 | 70                | 77                | 80                 | 8985           | 0               | 5285           | 0.00            |
| 10 | Y     | 400 | 50 | 1035              | 711             | 1.31 | 64                | 71                | 75                 | 7570           | 158             | 4455           | 0.63            |
| 11 | Y     | 400 | 50 | 1035              | 760             | 1.37 | 57                | 66                | 70                 | 5640           | 293             | 3320           | 1.18            |
| 12 | Y     | 400 | 50 | 1030              | 711             | 1.31 | 60                | 68                | 72                 | 3890           | 347             | 2290           | 1.39            |
| 13 | Y     | 400 | 50 | 695               | 189             | 0.60 | 61                | 69                | 72                 | 5980           | 0               | 3520           | 0.00            |
| 14 | Y     | 400 | 50 | 695               | 242             | 0.67 | 55                | 63                | 66                 | 5040           | 70              | 2965           | 0.28            |
| 15 | Y     | 400 | 50 | 695               | 258             | 0.69 | 47                | 55                | 60                 | 3770           | 131             | 2220           | 0.53            |
| 16 | Y     | 400 | 50 | 695               | 244             | 0.67 | 48                | 57                | 61                 | 2610           | 156             | 1535           | 0.63            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side · LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

